
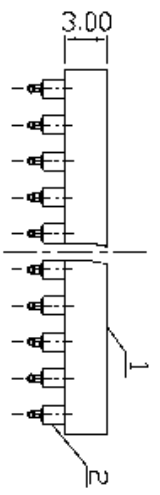



REV	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 05/24/05		

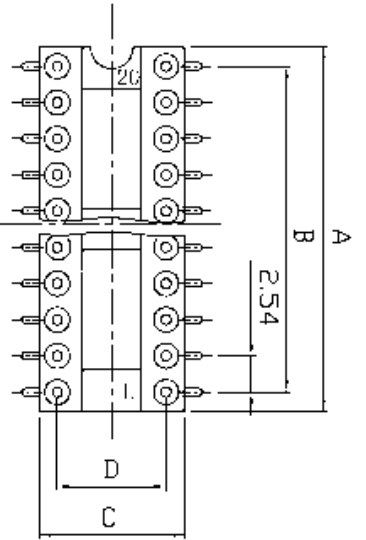

Position	Dimension			
	A±0.5	B±0.2	C	D±0.1
06	7.60	5.08	10.14	7.62
08	10.16	7.62	10.16	7.62
14	17.16	15.24	10.16	7.62
16	20.32	17.78	10.16	7.62
18	22.86	20.32	10.16	7.62
20	25.40	22.86	10.16	7.62
24	30.48	27.94	10.16	7.62
28	35.56	33.02	10.16	7.62
24	30.48	27.94	17.78	15.24
28	35.56	33.02	17.78	15.24
32	40.62	38.10	17.78	15.24
40	51.00	48.26	17.78	15.24

- NOTES:
- ELECTRICAL CHARACTERISTICS:
    - CONTACT RESISTANCE: 20mΩ Max. INITIAL.
    - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
    - INSULATION RESISTANCE: 1000MΩ Min.
  - ENVIRONMENT CHARACTERISTICS:
    - TEMPERATURE: -40°C~+105°C.
  - PART NUMBER:
  - PRODUCT NUMBER CODE:

GENERAL TOLERANCE ANGLE TOLERANCE

X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

PROJECTION	TITLE
	SMT IC SOCKET PITCH 2.54mm(0.100")
UNITS	mm
SHEET SIZE	A4
SERIES	

GOLD-XP-SMD

2	CONTACT	COPPER ALLOY	COLD PLATED	DRAWING TYPE	CUSTOMER
1	HOUSING	THERMOPLASTIC	UL 94 V-0	SCALE	1:1
ITEM	PART NAME	PART NO.	MATERIALS	FINISHED	SHEET 1 OF 1