


TECHNICAL SPECIFICATIONS

Material:	Zinc, Nickel Plated
Operating Temperature:	-40°C to +120°C
Cable Entry:	Side Entry
Thumbscrews:	UNC 4-40 (Standard) M2,5 or M3 on request
Cable O.D:	Up to 11,5mm (Size 9-37) Up to 17mm (Size 50)

Sub-D Connector:

Insulator:	PBT, Black, UL94 V-0
Shell:	Steel, Tin Plated
Contact pins:	Copper Alloy
Stamped & Formed Pins	Class 3, 100 inserts min.
Machined Contact Pins:	Class 1, 500 inserts min.
Contact Plating:	Selective Gold over Nickel
Operating Temperature:	-55°C to +105°C
Withstanding voltage:	1000V for 1 minute
Insulator resistance:	1000MΩ min.

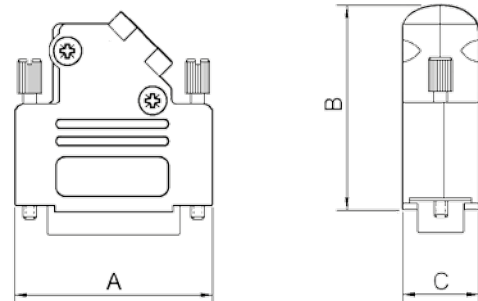

Features:

- Available in sizes 9-15-25-37-50
- Packed in Kit with MALE D-connector
- Class 3 or Class 1 connector as standard options
- Re-openable
- Full Metal Jackscrew as standard.

Size D45ZK	Dim A	Dim B	Dim C
9-way	31,0	36,3	14,5
15-way	39,5	40,3	14,5
25-way	53,2	40,3	14,5
37-way	69,7	40,3	14,5
50-way	67,4	44,9	17,4

Ordering information:

Class 3 Sub-D Connector Kits (100 inserts min.)

Size:	P/N - Kitted:	Product Code - MALE Conn. Kit
9-way	6355-0003-01	D45ZK09-DBP-K
15-way	6355-0003-02	D45ZK15-DBP-K
25-way	6355-0003-03	D45ZK25-DBP-K
37-way	6355-0003-04	D45ZK37-DBP-K
50-way	6355-0003-05	D45ZK50-DBP-K

Ordering information:

Class 1 Sub-D Connector Kits (500 inserts min.)

Size:	P/N - Kitted:	Product Code - MALE Conn. Kit
9-way	6355-0003-21	D45ZK09-DMP-K
15-way	6355-0003-22	D45ZK15-DMP-K
25-way	6355-0003-23	D45ZK25-DMP-K
37-way	6355-0003-24	D45ZK37-DMP-K
50-way	6355-0003-25	D45ZK50-DMP-K