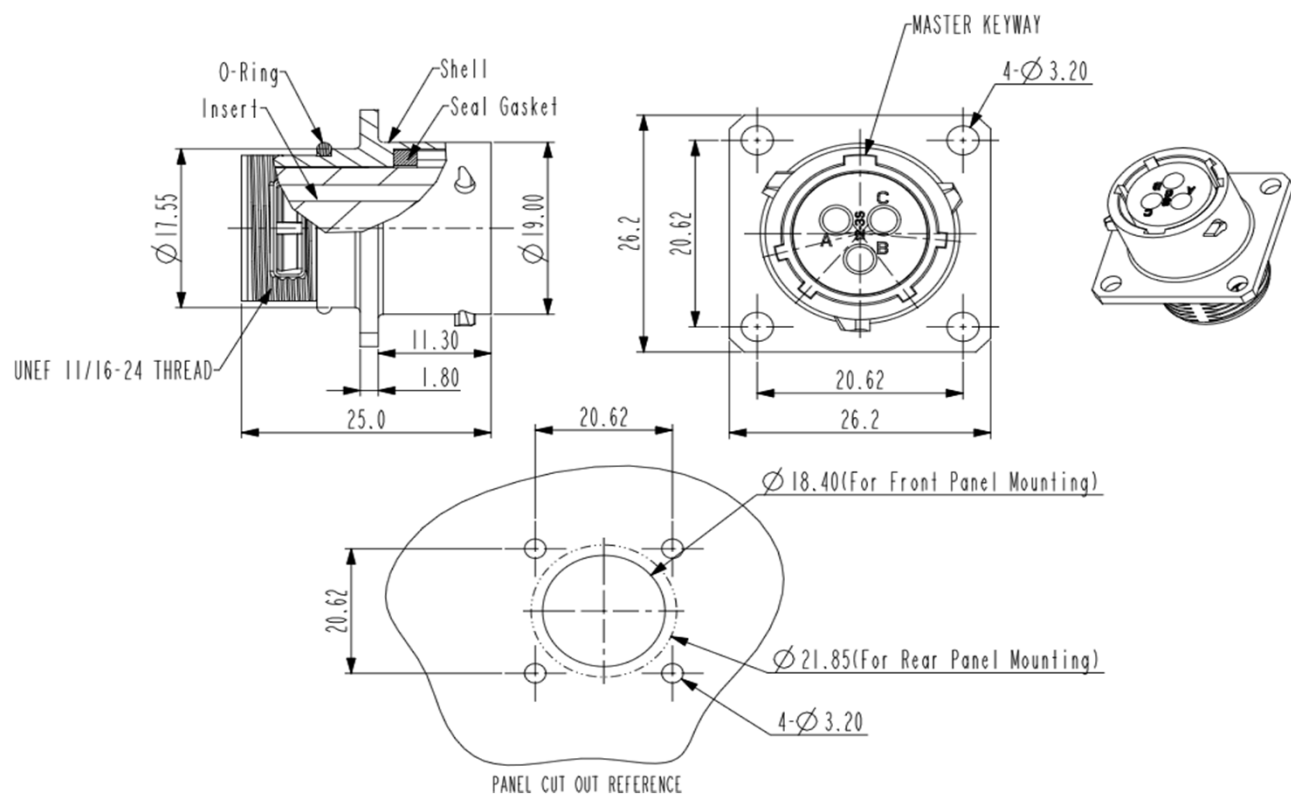


CONFIGURATION		PART NUMBER
Female Receptacle, 3 Pin, 16 Awg, Shell 12		RT00123SNH
DIMENSIONS		
 The technical drawing includes three views of the connector: a side view, a front view, and a panel cut out reference view. The side view shows the O-Ring, Insert, Shell, and Seal Gasket. Dimensions include a shell height of 17.55, a shell diameter of 19.00, a shell thickness of 1.80, a shell width of 11.30, and a shell length of 25.0. The front view shows a square flange with a side view of 26.2, a front view of 20.62, and a master keyway. The panel cut out reference view shows a circular cut out with a diameter of 18.40 (for front panel mounting) and 21.85 (for rear panel mounting), and a 4-Ø 3.20 mounting hole pattern.		
TECHNICAL DATA		
TEMPERATURE RANGE:	-40°C to + 105°C	
PROTECTION:	IP67 in mated condition and in combination with sealed backshell	
VOLTAGE RATING:	250V	
HOUSING BODY:	Zinc Alloy, Nickel Plated	
COUPLING NUT:	-	
INSERT:	Glass-filled Thermoplastic UL94-V0	
SEAL:	NBR	
CURRENT:	13A	
CONTACT SIZE:	16Awg	
APPROVALS:	UL ECBT2	