


REVISONS				
REV ZONE	ECD	DESCRIPTION	DATE	BY
01	--	RELEASE NUMBER	18-July-11	--

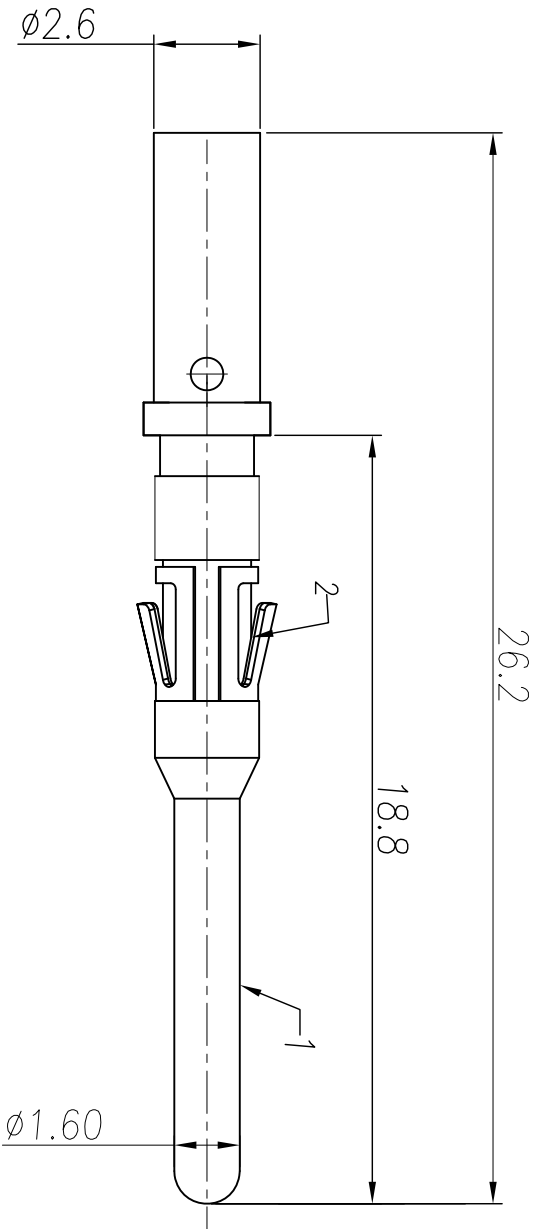

- General specification:
- 1.Suitable socket diameter:1.6mm(Size 16)
 - 2.Current rating:13A.
 - 3.Termination type:crimp
 - 4.Crimp wire range:16~18AWG
 - 5.Cable Strip Length:7mm
 - 6.Plating Specification:
 - 6.1.When XX=F Contact Plate Gold flash.
 - 6.2.WhenXX=G15 Contact Plate Gold 15u”.
 - 6.3.WhenXX=G30 Contact Plate Gold 30u”.
 - 7.Material Specification:See Below
 - 7.1.Contact Body: Brass.
 - 7.2.Metal Spring Clip:Beryllium Copper

UNLESS OTHERWISE SPECIFIED				MATERIAL SPECIFICATIONS:			
1) All dimensions are in metric(mm), 2) Tolerances are as follows:				PROCESS SPECIFICATIONS:			
1 PL DEC ±0.30 2 PL DEC ±0.15 3 PL DEC ±0.10				FRACTIONS ±1/64 ANGLES ±1°			
姓名	SIGNATURE	日期	DATE	THIS DRAWING IS SUPPLIED FOR INFORMATION ONLY. DESIGN FEATURES, SPECIFICATIONS AND THE PROPERTY OF THE APPLICANT, ORIGINATOR, NO RIGHTS OF REPRODUCTION ARE IMPLIED. ALL DIMENSIONS ARE SUBJECT TO NORMAL MANUFACTURING VARIATIONS.			
制图	DRAWN	Brandon	18-July-11				
审核	CHECKED	TOM	18-July-11				
工艺	ENGINEER						
批准	APPROVAL	Linda	18-July-11				
客户	CUSTOMER	CUSTOMER					
Dwg NO				SINE Systems Corporation			
				A Subsidiary of Amphenol Corporation			
				PIN CONTACT MACHINE SIZE 16,16~18AWG			
				MP16M23LXX			
				第三角投影			
				THIRD ANGLE PROJECTION			
				文件编号			
				TSCN NO.			
				幅面			
				SIZE			
				幅面			
				A4			
				MASS			
				REV.			
				01			
				SCALE			
				1:1			
				SHEET			
				SHTS			
				SHEET			
				NO.			
				1			