



Dear Customer,

realizing today, on what is apparent to others only tomorrow represents a part of the success of **MBS AG.**

We proudly present in our new catalogue our fullest product range of low voltage current transformers for industrial and tariff applications as well as our voltage transformers, measuring transducers, energy meters, and bus bar isolators and -supports.

The name of MBS is symbolic for innovation and know-how "Made in Germany". For more than 30 years, our world-wide customers are taking advantage of our vast selection of product availability combined with our highest standard of quality. Our numerous international certificates and licences are mirroring MBS's standard.

Our one to one consultation is readily available to you when searching together for solutions to your requirements whilst maintaining the highest standard quality of supply according to DIN EN ISO 9001.

My colleagues and I are looking forward to working with you.

Please take advantage of our short delivery times and optimal solutions.

MBS AG guarantees your success.

Yours,

A handwritten signature in blue ink, reading "W. Gilgen". The signature is fluid and cursive, with a large, stylized 'W' and 'G'.

Wolfgang Gilgen
Prof. Dr. h.c.



MBS AG
Eisbachstraße 51
74429 Sulzbach-Laufen
Sulzbach Messwandler
GERMANY

Tel.: +49 7976 9851-0
Fax: +49 7976 9851-90

E-mail: mbs@mbs-stromwandler.de
www.mbs-stromwandler.de

The descriptions in this catalogue are not binding.
We are not liable for any printing mistakes.
With the publication of this catalogue, any previously issued
information is rendered invalid.

Contents

About us	4
MBS distributors	9
MBS product groups summarized	12
Type annotation of MBS current transformers	14
MBS current transformers summarized	16
Current transformers – Technical characteristics	22
Low voltage current transformers for industrial applications	29
Tube current transformers	29/30
Tube current transformers, resin hardened	37
Tube current transformers for panel boards	39
Plug-in current transformers	41
Wound current transformers	97
Split core current transformers	107
Summation current transformers	111
NH-current transformers for fuse rails	117
Protection tube current transformers	123
Protection plug-in current transformers	126
Three-phase current transformer sets	155
Low voltage current transformers for tariff applications	165
Tube current transformers	166
Plug-in current transformers	167
Wound current transformers	193/194
Summation current transformers	193/195
Three-phase current transformers sets	197
Accessories for low voltage current transformers	203
Snap-on mountings	204
Copper tubes, mounting angle	204
Mounting kit, secondary caps	205
Locking pistons	205
Sealed shutters	205
Copper bus bars	206
Bus bar isolators	209/210
Bus bar supports	209/214
Additional products	221
Shunts	223
Amperemeters change-over switch	228
NEOZED fuse base, contact tongue	228
Voltage transformers for low voltage	229
1-pole isolated, 2-pole isolated	230
Measuring transducers	235
SWMU	236
NMC	239
FASK	242
EMBSIN	244
Order list	269
Electronic energy meters for industrial applications	291
Single-phase energy meters, direct measuring	292
Three-phase energy meters, direct measuring	298
Three-phase energy current transformer meters	304
Three-phase energy current transformer meters, front mounted 96 x 96 mm	313
Electro-mechanical energy meters for industrial applications	317
Electronic energy meters for tariff applications (calibrated)	319
Single-phase energy meters, direct measuring	320
Three-phase energy meters, direct measuring	323
Three-phase energy current transformer meters	336
Electro-mechanical energy meters for tariff applications	349

About ourselves

The Zähleranstalt Rudolf Köhler (ZARK), founded in the year 1925, was instrumental in the inauguration during 1977 through Wolfgang Gilgen, managing director and owner, in the today's very successful organization MBS Sulzbach Messwandler GmbH.

Further business involvement and investments follow at home and abroad.

1977



MBS is located in Baden-Württemberg, in the vicinity of Stuttgart. The organization is known very soon for the superior performance of its products, its great innovative strength, and the continuous growth of the business. MBS produces initially only a limited number of current transformers. Measuring performances, innovations, and maximal product reliability lead in a short time to obtain a greater, and growing share of the market.

1985

Since 1985 MBS represents „Staatlich anerkannte Prüfstelle für Messgeräte für Elektrizität EA90“ (a state registered testing office for measuring instruments for electricity). This accolade was only bestowed on MBS for their continued optimal performance on measuring reliability and user friendly safety of their products.



1987



The first works in Sulzbach-Laufen soon reaches its capacity limit due to the marketing success, increasing sales and an ever expanding product range. MBS is compelled to enlarge their production and storage facilities. A second works is created which is adapted to cater for further eventualities.

1995

MBS receives the **quality certificate „DIN EN ISO 9001“** issued by TÜV Mannheim. This distinction opens the door for the worldwide activities. Already in this year MBS is exporting to more than 20 countries.



1997

The worldwide activities of MBS Sulzbach Messwandler GmbH are a challenge for the company administration. An architecturally challenging as well as highly functional multipurpose building is completed in the Eisbachstraße 51. Today we find here the headquarters of the MBS group of companies.

Production and warehouse facilities are not confined just to Sulzbach-Laufen, but also extend to a neighbouring town. In Slovenia MBS MT is born to produce the cores for our current transformers.

1998

We are certified by the GL Germanischer Lloyd „**GL Type Approval Certificate**“.

2000

MBS views the future optimistically and will consider at all times the implementation of new challenges. A fully automated production line for metal and synthetic materials is installed. Due to the constant growth in the demand for measuring transducers only the best state-of-the-art up technology is acquired and implemented.



2004

The expansion of the product range as well as the custom made units contribute further to the sales successes.

To satisfy the demands of our customers, it is necessary to increase the production capacity. At the same time, costs in manufacturing had to be reduced. With these tasks in mind a new modern storage and logistic center is introduced at the main factory in Sulzbach-Laufen.

2005

MBS again increase their turnover. More and more customers believe in the product and acknowledge the high quality and professionalism of MBS.

A subsidiary is established in North Rhine-Westphalia, as well as offices in London „MBS Sulzbach Messwandler Limited“ and in Slovenia „MBS-CT d.o.o.“.

2006

A further expansion is being implemented for the mechanical production of synthetic materials and enlargement of the product range.

Another two-storey building is purchased complete with offices and facilities for the production of cores for the current transformers. This manufacturing site is equipped with machinery for steel band cutting of all sizes, core winding machines, core heating furnaces as well as overhead mobile cranes for transporting heavy loads.



2007



MBS AG is born.

A subsidiary is established in northern Germany to serve northern Europe.

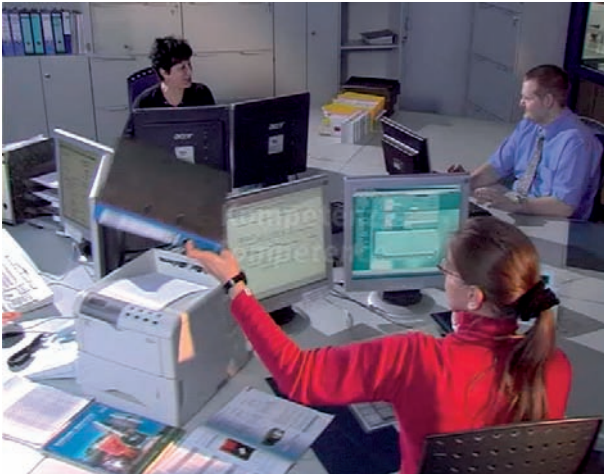
Very senior engineers are employed in management to meet the ever increasing work load.

At our three production centres, situated in the Federal Republic of Germany, on an area spanning more than 12.000 m², 4.700 transformers „Made in Europe“ are being built, in multi-shift operation, locally to 100 % in Baden-Württemberg.

More than 20.000 products are supplied to all continents.



Our expectations for the future



An extremely long list of orders making full use of our production capacity, ensures that we can look into a successful future.

We expect an increase in customers as well as distributors. We have to be prepared and not lose-out at what we have created.

The foundation is in place and improvements are beginning. The tools for refinements are in place. An important focus is to keep our administrative staff fully informed of up-to-date computer technology, which is only one of many tasks.

Realizing today, on what others think only tomorrow is our motto. More engagement, more service, and more customer satisfaction, are at all times the goals of MBS.

The management and all employees are highly motivated, as well as customer oriented, and know the importance of service, quality responses, innovation and assisting the customer by providing the shortest delivery times whenever possible. This can only be achieved by means of hand-in-glove cooperation between the various departments. These efforts are clearly reflected in our customers in the home and export markets as well as our continuously growing customer base consisting of well-known international organizations covering industry and energy supply companies. We are proud of the results of our hands-on activities. However, the past whilst very encouraging is now consigned to history.

Please visit our **MBS homepage:**
www.mbs-stromwandler.de





Headquarters

 **MBS AG**
Eisbachstraße 51
74429 Sulzbach-Laufen
Sulzbach Messwandler
Germany
Tel.: +49 7976 9851-0
Fax: +49 7976 9851-90
E-mail: mbs@mbs-stromwandler.de

Works 2:
Eisbachstraße 33
74429 Sulzbach-Laufen
Germany

Works 3:
Eugen-Hahn-Straße 35
73565 Spraitbach
Germany

MBS AG
Northern Europe
Am Seedeich 9-11
27472 Cuxhaven
Sulzbach Messwandler
Germany
Tel.: +49 4721 399039
Fax: +49 4721 399047
E-mail: mbs@mbs-stromwandler.de

 **MBS Sulzbach Messwandler Ltd**
Hans Gerlach
P.O.Box 31635, London W11 3WF
England
Tel.: +44 20 77273254
Fax: +44 20 72219445
E-mail: Mbshans@aol.com

Domestic

Baden-Württemberg

Baden

Henry Wollschläger
Industrievertretung-Elektrotechnik
Seckacher Str. 158
68259 Mannheim
Tel.: +49 621 7140-427
Fax: +49 621 7140-527
E-mail:
buerowollschlaeger@t-online.de

Württemberg

MDB Blechschmidt
Weißer Weg 30
74417 Gschwend
Tel.: +49 7972 72066
Fax: +49 7972 6398
E-mail:
mdb@mdb-blechschmidt.de

Bayern

Franken, Niederbayern, Oberpfalz

Ing.-Büro Beyer
Elektroingenieurbüro
Hauptstr. 33
91094 Langensendelbach
Tel.: +49 9133 5983
Fax: +49 9133 9877
E-mail: info@ibbeyer.de

Südbayern

Ing. Adolf Müller GmbH
Industrievertretungen
Elly-Staegmeyr-Straße 15
80999 München
Tel.: +49 89 8126-044
Fax: +49 89 8126-925
E-mail: info@ingam.de

Berlin

Ingenieurbüro
Günter Hentschel
Paul-Lincke-Ufer 39/40
10999 Berlin
Tel.: +49 30 617895-0
Fax: +49 30 617895-11
E-mail: info@hentschel-vertrieb.de

Brandenburg

Ingenieurbüro
Günter Hentschel
Paul-Lincke-Ufer 39/40
10999 Berlin
Tel.: +49 30 617895-0
Fax: +49 30 617895-11
E-mail: info@hentschel-vertrieb.de

Bremen

Ingenieurbüro Breuell
Techn. Vertretungen GmbH
Grützmühlenweg 40
22339 Hamburg
Tel.: +49 40 538092-10
Fax: +49 40 538092-85
E-mail: info@breuell.de

Hamburg

Ingenieurbüro Breuell
Techn. Vertretungen GmbH
Grützmühlenweg 40
22339 Hamburg
Tel.: +49 40 538092-10
Fax: +49 40 538092-85
E-mail: info@breuell.de

Hessen

H.-J. Ehrlich KG
Automation + Energietechnik
Kurmainzer Str.45
65929 Frankfurt/Main
Tel.: +49 69 860066-0
Fax: +49 69 860066-30
E-mail: info@ehrlich-kg.de

Mecklenburg-Vorpommern

Ingenieurbüro Breuell
Techn. Vertretungen GmbH
Grützmühlenweg 40
22339 Hamburg
Tel.: +49 40 538092-10
Fax: +49 40 538092-85
E-mail: info@breuell.de

Niedersachsen

Fritsche Industrievertretungen
GmbH
Großhorst 15
30916 Isernhagen
Tel.: +49 5136 8893-0
Fax: +49 5136 8893-20
E-mail: info@fritschegmbh.de

Nordrhein-Westfalen

A + H
Vertriebsgesellschaft für Geräte
der Steuer- und Regeltechnik mbH
& Co. KG
Borner Str. 31
42897 Remscheid
Tel.: +49 2191 9376-0
Fax: +49 2191 9376-76
E-mail: info@auh-vertrieb.de

Saarland

Henry Wollschläger
Industrievertretung-Elektrotechnik
Seckacher Str. 158
68259 Mannheim
Tel.: +49 621 7140-427
Fax: +49 621 7140-527
E-mail:
buerowollschlaeger@t-online.de



Bereich: EVU
KDK Dornscheidt GmbH
Gewerbegebiet Oberpleis
In der Brückenwiese 7
53639 Königswinter
Tel.: +49 2244 91994-0
Fax: +49 2244 91994-14
E-mail: info@kdk-dornscheidt.com

Rheinland-Pfalz

Henry Wollschläger
Industrievertretung-Elektrotechnik
Seckacher Str. 158
68259 Mannheim
Tel.: +49 621 7140-427
Fax: +49 621 7140-527
E-mail:
buerowollschlaeger@t-online.de

H.-J. Ehrlich KG
Automation + Energietechnik
Kurmainzer Str.45
65929 Frankfurt/Main
Tel.: +49 69 860066-0
Fax: +49 69 860066-30
E-mail: info@ehrlich-kg.de

Sachsen

Tandel & Partner GbR
Industrievertretungen/Ing.-Büro
Mommensenstr. 2
04329 Leipzig
Tel.: +49 341 252449-0
Fax: +49 341 252449-19
E-mail: info@tandel-partner.de

Sachsen-Anhalt

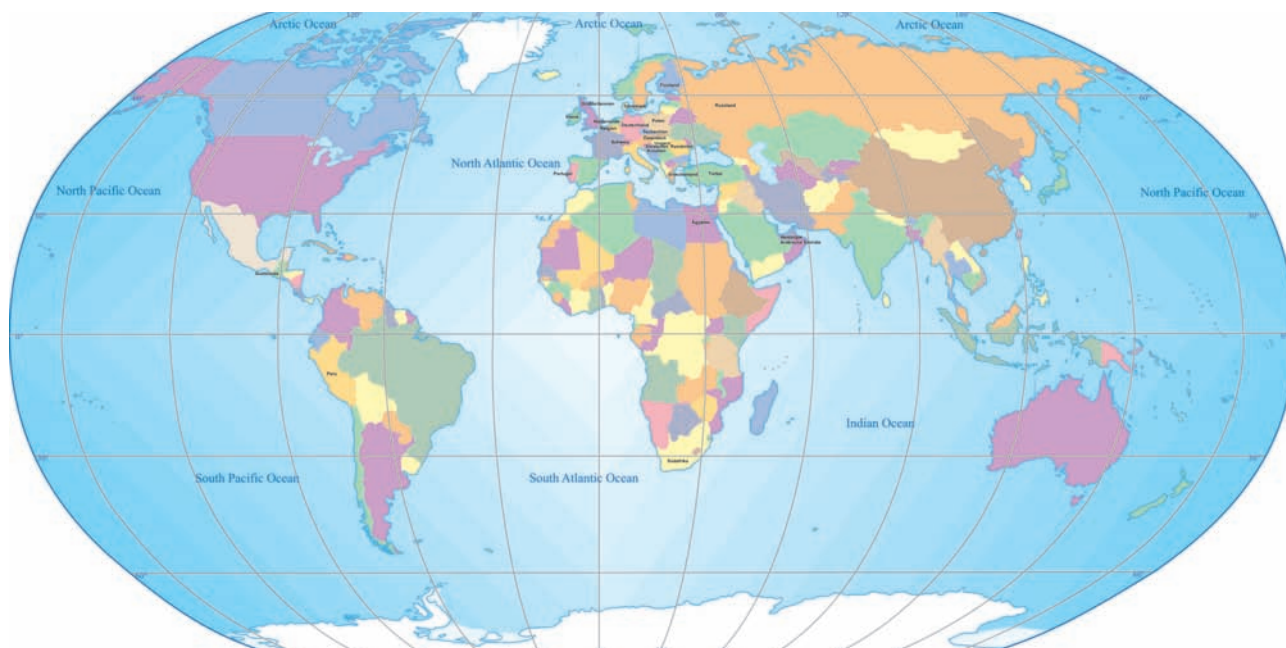
Tandel & Partner GbR
Industrievertretungen/Ing.-Büro
Mommensenstr. 2
04329 Leipzig
Tel.: +49 341 252449-0
Fax: +49 341 252449-19
E-mail: info@tandel-partner.de

Schleswig-Holstein

Ingenieurbüro Breuell
Techn. Vertretungen GmbH
Grützmühlenweg 40
22339 Hamburg
Tel.: +49 40 538092-10
Fax: +49 40 538092-85
E-mail: info@breuell.de

Thüringen

Industrievertretung
Gebr. Göritz GmbH
Feldstr. 1
99334 Ichtershausen
Tel.: +49 3628 62917-0
Fax: +49 3628 640284
E-mail: Gebr.Goeritz@gmx.de



Europe

Austria
Fischmeister Handelsges. mbH
Herzogstr. 58
4060 Leonding
Tel.: +43 70 651642-0
Fax: +43 70 651642-20
E-mail: office@fischmeister.at

Belgium
Verdoolaege NV
Meet- en regeltechniek
Noorderlaan 117
2030 Antwerpen
Tel.: +32 35 411111
Fax: +32 35 410635
E-mail: info@verdoolaege.be

Bulgaria
GTT Engineering Ltd.
10 Yuriy Venelin str.
9004 Varna
Tel.: +359 52 636728
Fax: +359 52 602393
E-mail: office@gtt-eng.net

Czech Republic
GHV Trading spol.s.r.o
Kounicova 67a
602 00 Brno
Tel: +420 541 2355-32, -33, -34
Fax: +420 541 235387
E-mail: ghv@ghvtrading.cz

Croatia
Tomas & Co.
Kopilica 9
21000 Split
Tel.: +385 21 490643
Fax: +385 21 490642
E-mail: tomas-co@st.t-com.hr

Denmark
DEIF A/S
Frisenborgvej 33
7800 Skive
Tel.: +45 9614 9614
Fax: +45 9614 9615
E-mail: deif@deif.com

Estonia
Klinkmann Eesti As
Mehaanika 2 B
10602 Tallinn
Tel.: +372 668 4500
Fax: +372 668 4501
E-mail: klinkmann.est@klinkmann.ee

Finland
Sähkölehto OY
Holkkitie 14
00880 Helsinki
Tel.: +358 97 746420
Fax: +358 97 591071
E-mail: office@sahkolehto.fi

OY KLINKMANN
P.O.Box 38
00371 Helsinki
Tel.: +358 9 540 4940
Fax: +358 9 541 3541
E-mail: automation@klinkmann.fi

Greece
2KAPPA LTD
Sofokli Venizelou 13
54628 Menemeni Thessaloniki
Tel.: +30 2310 775510-13
Fax: +30 2310 775514-15
E-mail: 2kappa@pel.forthnet.gr

VIMKA Ltd
Neoktista Aspropyrgou
19300 Aspropyrgos
Attikis/Athens
Tel.: +30 210 5590870,
5590759
Fax: +30 210 5590832
E-mail: vimka@internet.gr

Hungary
Duvalex BT für Handel +
Dienstleistungen
Szárny u. 6
1173 Budapest
Tel.: +36 12 572217
Fax: +36 12 572217
E-mail: duvalex@mail.externet.hu

0,4 KV Kereskedelmi Kft.
Illatos út 38/a.
1097 Budapest
Tel.: +36 12 811850
Fax: +36 12 811851
E-mail: 04kv@04kv.hu

Latvia
Klinkmann Lat Ltd.
Ganib dambis 2a
1045 Riga
Tel.: +371 738 1617
Fax: +371 738 2451
E-mail: klinkmann@klinkmann.lv

Lithuania
UAB Klinkmann Lit
Smolensko str. 10
03201 Vilnius
Tel.: +370 5 215 1646
Fax: +370 5 216 2641
E-mail: post@klinkmann.lt

UAB Klinkmann Lit
Kauno str. 21A
91558 Klaipeda
Tel.: +370 46 310 850
Fax: +370 46 310 850
E-mail: post@klinkmann.lt

 **Norway**
DEIF Norge AS
Døveleien 41
3170 Sem
Tel.: +47 3338 1600
Fax: +47 3338 1601
E-mail: norge@deif.com

 **Poland**
ASTAT sp. z o.o.
ul. Dabrowskiego 441
60-451 Poznan
Tel.: +48 61 8488871
Fax: +48 61 8488276
E-mail: info@astat.com.pl

 **Portugal**
SISTEMAS DE
AUTOMAÇÃO E CONTROLE, LDA
Rua Álvaro Ferreira Alves, 56-C
Zona Industrial Santa Marta do Pinhal
2855-591 Corroios
Tel.: +351 21 2549280
Fax: +351 21 2549288
E-mail: sparra@sisacol.com

 **Romania**
Business for Business
Str. Gara Herastrau nr. 4 - Etaj. IV
Bucharest-Sector 2
020334 Bucharest
Tel.: +40 21 2329502, 2329503
Fax: +40 21 2329294
E-mail: office@dcb.ro

COELCO TRADE
Autostrada Bucuresti-Pitesti, Km 13.5
Parcul Industrial "Polo Occidentale",
Hall M
Bucharest
Tel.: +40 21 3100961/62
Fax: +40 21 3100989
E-mail: office@coelco.ro

 **Russia**
East-West Consulting
Am Alten Berg 7
97996 Niederstetten
Tel.: +49 7932 606456
Fax: +49 7932 606458
E-mail: mbs@easteuropeconsulting.com

ELECTROMASHHOLDING Ltd.
Verhnjaja Krasnoselskaja 2
Moscow, 107140
Tel.: +7 495 9805516
Fax: +7 495 9806409
E-mail: aglu@elmash-holding.ru

ETK Joule GmbH
Elektrohnaja Strasse, Haus 2, Bl. 12-14
Moscow, 111141
Tel.: +7 495 3631867
Fax: +7 495 3631867
E-mail: mail@joule.ru

 **Serbia**
INTERTEHNIK TRADE doo
Nebojsina 26
11000 Belgrade
Tel.: +381 11 2441536
Tel.: +381 11 3835148
Fax: +381 11 2433370
E-mail: office@intertehnik.co.yu

 **Slovenia**
TDR Trading d.o.o.
Ul. 10. oktobra 9
2000 Maribor
Tel.: +386 22 294650
Fax: +386 22 522401
E-mail: info@tdr-trading.si

 **Sweden**
Beving Elektronik AB
Box 93
127 22 Skärholmen
Tel.: +46 8680 1199
Fax: +46 8680 1188
E-mail: info@bevingelektronik.se

 **Switzerland**
Liechtenstein
WISAR Wyser + Anliker AG
Steinackerstraße 29
8302 Kloten
Tel.: +41 44 81522 33
Fax: +41 44 81522 60
E-mail: info@wisar.ch

 **The Netherlands**
Controlin BV
Glasblazerstraat 1
2984 BL Ridderkerk
Tel.: +31 180 330522
Fax: +31 180 330529
E-mail: sales@controlin.nl

 **United Kingdom**
MBS Sulzbach Messwandler Ltd
Hans Gerlach
P.O.B. 31635, London W11 3WF
Tel.: +44 20 77273254
Fax: +44 20 72219445
E-mail: Mbshans@aol.com

Nortonics Foxtam Limited
Bridge Road, Camberley
Surrey, GU15 2QR
Tel.: +44 1276 25858
Fax: +44 1276 25885
E-mail: sales@nortonicsfoxtam.co.uk

Outside Europe

 **Bahrain**
TERRAMAR GmbH
Dorotheenstr. 82
22301 Hamburg
Tel.: +49 40 27073-0
Fax: +49 40 27073-350
E-mail: cfn@terramar.de

 **Costa Rica**
Wolfgang Rodemann
11 calle 19-64 Zona15 V.H.3
Guatemala-Ciudad
Guatemala C.A.
Tel.: +502 5693 3987
Fax: +502 2364 0940
E-mail: wolfgangrodemann@yahoo.de

 **Egypt**
Pyram Eng. & Trading Co.
27 Aloba st off Al-Haram st,
Al-Haram Giza - P.O.Box 12111
Tel./Fax: +202 58 28541/3
+202 58 53032
E-mail: pyram@link.net

 **El Salvador**
Wolfgang Rodemann
11 calle 19-64 Zona15 V.H.3
Guatemala-Ciudad
Guatemala C.A.
Tel.: +502 5693 3987
Fax: +502 2364 0940
E-mail: wolfgangrodemann@yahoo.de

 **Guatemala**
Wolfgang Rodemann
11 calle 19-64 Zona15 V.H.3
Guatemala-Ciudad
Guatemala C.A.
Tel.: +502 5693 3987
Fax: +502 2364 0940
E-mail: wolfgangrodemann@yahoo.de

 **Honduras**
Wolfgang Rodemann
11 calle 19-64 Zona15 V.H.3
Guatemala-Ciudad
Guatemala C.A.
Tel.: +502 5693 3987
Fax: +502 2364 0940
E-mail: wolfgangrodemann@yahoo.de

 **Kuwait**
TERRAMAR GmbH
Dorotheenstr. 82
22301 Hamburg
Tel.: +49 40 27073-0
Fax: +49 40 27073-350
E-mail: cfn@terramar.de

 **Mexico**
Wolfgang Rodemann
11 calle 19-64 Zona15 V.H.3
Guatemala-Ciudad
Guatemala C.A.
Tel.: +502 5693 3987
Fax: +502 2364 0940
E-mail: wolfgangrodemann@yahoo.de

 **Oman**
TERRAMAR GmbH
Dorotheenstr. 82
22301 Hamburg
Tel.: +49 40 27073-0
Fax: +49 40 27073-350
E-mail: cfn@terramar.de

 **Peru**
CEYESA
Ingenieria Eléctrica S.A.
Pque. Internacional de la Industria
y Comercio
Av. Enrique Meiggs no. 255-257
Callao
Tel.: +51 1451 7936 / 452-4565
Fax: +51 1451 7272 / 451-0617
E-mail: ceyesacomerci-
al@rednextel.com.pe

 **Qatar**
TERRAMAR GmbH
Dorotheenstr. 82
22301 Hamburg
Tel.: +49 40 27073-0
Fax: +49 40 27073-350
E-mail: cfn@terramar.de

 **Saudi Arabia**
Specialize Symbol
P.O. Box 515
Riyadh 11421
Tel.: +966 1 476 5311
Fax: +966 1 479 3019
E-mail: specializesym-
bolksa@hotmail.com

 **South Africa**
Fleck Technologies (PTY) LTD
7 Van der Sterr Road
Rhodesfield extension 1, Kempton Park
1620 Johannesburg, Gauteng Province
Tel.: +27 11 3946308
Fax: +27 11 3946308
E-mail: mike.pirie@telkomsa.net

 **Sudan**
El Watania for Engineering &
Trading
270A Sudan Str.
El Mohandssen, Giza, Egypt
Tel.: +20 23025648
Fax: +20 23038613
E-mail: watnia161@hotmail.com

 **United Arab Emirates**
GDS Gulf Dynamic
Switchgear Co.Ltd.
P.O.Box 6155
Sharjah
Tel.: +971 6533 8568
Fax: +971 6533 6383
E-mail: info@gulfdynamic.com

Gama Electro-Mechanics Devices
Trdg. Co. (LLC)
P.O. Box 22185
Sharjah
Tel.: +971 6533 5453
Fax: +971 6533 8182
E-mail: gama@emirates.net.ae

 **Yemen**
Al Khaled For General Commercial
Agencies
P.O. Box 11153
Sanaa
Tel.: +967 1 513532
Fax: +967 1 500791
E-mail: aktc1@yahoo.com
E-mail: dabwan101@yahoo.com.au

MBS product groups summarized

Low voltage current transformers for industrial applications

Class 1, 0.5, 0.2s



ASR	Tube current transformers, primary round conductor
ASG	Tube current transformers, hardened
	Tube current transformers for panel boards
ASK	Plug-in current transformers
WSK	Wound current transformers
KBU	Split core current transformers
KSU / SUSK	Summation current transformers
NH	Current transformers for fuse rails
ASRD 14 / ASRD 210.3	Three-phase current transformer sets
ASKD / WSKD	Three-phase current transformer sets with or without base plate and neutral conductor
SASR	Protection tube current transformers, primary round conductor
SASK	Protection plug-in current transformers

Low voltage current transformers for tariff applications, calibrated or suitable for calibration

Class 0.5, 0.5s, 0.2, 0.2s



EASR	Tube current transformers, primary round conductor
EASK	Plug-in current transformers
EWSK	Wound current transformers
ESUSK	Summation current transformers
EASK(D)	Three-phase current transformer sets
EASKD / EWSKD	Three-phase current transformer sets with or without base plate and neutral conductor

Accessories for low voltage current transformers

- Snap-on mountings
- Copper tubes
- Mounting angle, mounting kit, secondary caps
- Locking pistons
- Sealed shutters
- Copper bus bars

Bus bar isolators/ -supports



DB/P	Spacing isolators
CO/P	
CS/P	
CT/P	
CPE	
PI/P	Ducting isolators
PSB	Vertical bus bar supports
GB	Mounting material, threaded bolts
SK	Hexagon spacer in brass
	Bus bar supports
	Bus bar support L- and Z-profile

Additional products

- Shunts
- Amperemeter change-over switch
- Voltmeter change-over switch
- NEOZED-fuse base
- Contact tongue

Voltage transformers up to 1 kV



MBE / MBEV / MBER	1-pole isolating voltage transformers
MBZ / MBZV / MBZR	2-pole isolating voltage transformers

Measuring transducers



SWMU	Measuring transducers for AC current with integrated current transformer ■ with auxiliary voltage supply, 230 V AC ■ with auxiliary voltage supply, 24 V DC ■ without auxiliary voltage supply
NMC	Measuring transducers for AC current, for direct notching onto MBS current transformers ■ with auxiliary voltage supply, 230 V AC, 110 V AC ■ with auxiliary voltage supply, 24 V DC ■ without auxiliary voltage supply ■ measuring range 5 A or 1 A
NMC-AD	Mounting adaptor for any type of current transformers
NMC-KSx	Short circuit adaptor
FASK	Current transformers with separable, flexible measuring system
EMBSIN	Measuring transducers for electrical variables ■ AC current with/without auxiliary voltage supply ■ AC current with wide range auxiliary voltage supply, effective current value (RMS) ■ AC voltage with/without auxiliary voltage supply ■ AC voltage with wide range auxiliary voltage supply, effective current value (RMS) ■ Frequency with auxiliary voltage supply ■ Frequency difference with auxiliary voltage supply ■ Phase angle with auxiliary voltage supply ■ Phase angle difference with auxiliary voltage supply ■ Power factor with auxiliary voltage supply ■ Active power with auxiliary voltage supply ■ Reactive power with auxiliary voltage supply ■ Programmable measuring transducers for AC current with auxiliary voltage supply ■ Programmable universal measuring transducers with up to 3 analogue outputs, with auxiliary voltage supply

Electronic energy meters for industrial applications



- 1-phase energy meters, direct reading
- 3-phase energy meters, direct reading
- 3-phase energy meters for current transformers
- 3-phase energy meters for current transformers, front mounted 96 x 96 mm
- Electro-mechanical energy meters

Energy meters for tariff application (suitable for calibration)

- 1-phase energy meters, direct reading
- 3-phase energy meters, direct reading
- 3-phase energy meters for current transformers
- Electro-mechanical energy meters

Type annotation of MBS current transformers

Our production exclusively comprises low voltage current transformers of the 0.5 series with a max. operating voltage up to 0.72 kV, acc. to DIN VDE 0414, part 1, DIN 42600 and DIN EN 60044/1, edition 12/2003 as well as the regulation VBG 4. For the DIN specification, the most recent information is at all times applicable.

Our delivery programm comprises:

Low voltage current transformers for industrial applications

ASR	Tube current transformers for primary nominal currents from 40 A up to 600 A, secondary nominal currents 5 A or 1 A, optional secondary change-over function, classes 0.5 and 1, optional with copper tube or snap-on mounting
ASK	Plug-in current transformers for primary nominal currents from 30 A up to 7500 A, secondary nominal currents 5 A or 1 A, optional for dual or triple secondary change-over function, classes 0.2, 0.5 and 1, without primary conductor, but with foot angle, isolator protection cap, and bus bar mounting screws, alternatively with chrome plated. Copper bus bar, conforming to the bus bar window, inclusive of screws DIN 933, complete with nuts, U-discs and springs for the mounting onto bus bars, or similar components
ASG	Tube current transformers for primary nominal currents from 50 A up to 300 A, secondary nominal currents 5 A or 1 A, class 1, with fixed secondary conductors, 2.5 mm² connections for nominal wire cross section, measuring system resin hardened Tube current transformers for panel boards for 50 A up to 1250 A with 1...3 measuring systems integrated in one housing
WSK	Wound current transformers for primary nominal currents from 1 A up to 150 A, secondary nominal currents 5 A or 1 A, classes 0.5 and 1, with primary winding and primary connectors instead of a continuous bus bar
KBU	Split core current transformers for primary nominal currents from 100 A up to 5000 A, secondary nominal currents 5 A or 1 A, classes 0.5 and 1, with a separable measuring system for an easy fitment into an already existing installation, without additional mounting requirements. The locking mechanism of the current transformers is to be opened for the installation and is to be closed when the unit is in place, an audible click ensures that the circuit is closed. This unit is ready for operating after the secondary conductors have been connected
KSU / SUSK	Summation current transformers for primary nominal currents from 5 A up to 1 A, secondary nominal currents 5 A or 1 A, classes 0.5 and 1. The numerals following the letter indicate the quantity of how many primary circuits can be connected, up to 8 connections are possible
NH	Current transformers for fuse rails for primary nominal currents from 100 A up to 600 A, secondary nominal currents 5 A or 1 A, optional secondary change-over switch function, class 3, secondary connections in excess of 4 mm require jacks, for direct mounting onto the contact rail of low voltage-high performance fuses, integrated in the NH fuse set, available in sizes NH 1, NH 2 and NH 3
SASR / SASK	Protection current transformers for primary nominal currents from 50 A up to 2000 A, secondary nominal currents 5 A or 1 A, classes 5P5, 10P5, 5P10, and 10P10. Additional sizes are available upon request.
ASRD / ASK(D) / WSKD / ASKD	Three-phase current transformers for primary nominal currents from 3 x 50 A up to 3 x 750 A, secondary nominal currents 5 A or 1 A, classes 0.5 and 1, optional dual secondary change-over function

Custom-build units correspond in their construction form to the above mentioned technical norms.

Optimal solution for the application of tube- and plug-in current transformers for low nominal currents

Bushing type current transformers

With low measuring currents up to approximately 50 A it is possible to use a single-phase plug-in current transformer instead of the normally used wound current transformer. The prerequisite of course is, that the primary nominal current of the current transformer corresponds to an integral multiple of the measuring currents. The primary winding will in this case be threaded once or repeatedly through the primary conductor opening.

primary ct nominal current A	number of threads	primary nominal current to be measured A
50	1	50
	2	25
	5	10
	10	5
100	1	100
	2	50
	4	25
	5	20
	10	10
	20	5
150	1	150
	2	75
	3	50
	5	30
	6	25
	10	15
	15	10

Low voltage current transformers for tariff applications

EASR

Tube current transformers for primary nominal currents from 100 A up to 600 A, secondary nominal current 5 A or 1 A, classes 0.2, 0.5s and 0.5 with type approval by PTB Braunschweig for application for tariff purposes.

EASK

Plug-in current transformers for primary nominal currents from 25 A up to 3200 A, secondary nominal current 5 A or 1 A, classes 0.2, 0.5s, and 0.5 with type approval for the application for tariff purposes.

EWSK

Wound current transformers for the primary nominal current from 25 A up to 150 A, secondary nominal currents 5 A or 1 A, classes 0.2, 0.5s and 0.5 with type approval for the application for tariff purposes, with primary winding and primary connection terminals instead of a primary conductor opening.

ESUSK

Summation current transformers for primary nominal currents 5 A, secondary nominal currents 5 A, class 0.2, with type approval for the application for tariff purposes. The numerals following the letter indicate the number of how many primary circuits can be connected, up to 8 connections are possible.

EASK(D) / EWSKD / EASKD

Three-phase current transformers for primary nominal currents from 3 x 50 A up to 3 x 750 A, secondary nominal currents 5 A or 1 A, classes 0.2, 0.5s and 0.5, optional for dual secondary change-over function with type approval for the application for tariff purposes, for space-saving installation in energy distribution, current transformer set, mounted with primary connecting bus bars and integrated protection cover.

Note:

All current transformers for tariff application have been tested at the Physikalisch Technische Bundesanstalt Braunschweig (PTB). This classification is visual on our name plate.

To differentiate between our current transformers we have arranged for the letter "E" to be set in front of all other references.

MBS Current Transformers Summarized

Tube Current Transformers

Plug-in Current Transformers

Page	30	31	32	33	34	35	36	38	39	42	43	44	45	46	47	49	51	54	55	56	58	Page
	ASR 14.3 (*)	ASR 20.3 (*)	ASR 201.3 (*)	ASR 21.3 (*)	ASR 21.5	ASR 22.3 (*)	ASR 42.45	ASG 210.3	ASG 106 (*)	ASK 205.3 (*)	ASK 21.3 (*)	ASK 231.5	ASK 31.3 (*)	ASK 318.3 (*)	ASK 31.4 (*)	ASK 31.5 (*)	ASK 31.6	ASK 41.3 (*)	ASK 421.4	ASK 41.4 (*)	ASK 41.5 (*)	
Primary nominal current	Accuracy classes for sec. 5 A and sec. 1 A with information of max. burden in VA																					Primary nominal current
	NEW								NEW												NEW	
A	1	0.5	1	0.5	1	0.5	1	1	1	1	0.5	1	0.5	1	0.5	1	0.5	1	0.5	1	0.5	A
1																						1
2.5																						2.5
5																						5
10																						10
15																						15
20																						20
25																						25
30	1																1.5		1			30
40	1					1					1					1	2.5		1.5			40
50	1.5	1	1		1.5	2.5	1.5		1		1.5	1.25	1		1.5	2.5	2.5	2.5	1.5	2.5	1.5	50
60	1.5	1.25	1.25		1.53.75	1.5		1.25		1	1.5	1	1.25	1	1	2.5	2.5	2.5	1.5	3.75	1.5	60
75	1.5	1.5	1.5		1.53.75	2.5		1.5		1	2.5	1.25	2.5	1.5	1.5	2.5	2.5	5	2.5	5	2.5	75
80		1.5	1.5		1.5	5	2.5	1.5		1.25	2.5	2.5	5	2.5	2.5	2.5	5	5	10	2.5	2.5	80
100		2.5	2.5	2.5	2.5	1	2.5	5	2.5	1.5	2.5	5	2.5	2.5	2.5	5	5	5	10	15	2.5	100
125		2.5	3.75	2.5	3.75	2.5	5		3.75	2.5	5							5	10	5	5	125
150		2.5	3.75	2.5	3.75	1.5	5	10	5	2.5	5	5	5	5	5	5	7.5	15	15	5	7.5	150
200		5	5	5	5	2.5	10	15	5	10	10	10	10	10	10	10	15	15	15	10	7.5	200
250		5	7.5	5	7.5	5	10	15	10	15	10	15	10	10	10	15	15	15	15	15	15	250
300		5	7.5	5	7.5	5	15	15	10	15	10	15	10	10	10	15	15	15	15	15	15	300
400					10	15	15	10	15	10	15	10	10	10	10	15	15	30	15	15	15	400
500					10	15	15	10	15	10	15	10	10	10	10	15	15	30	15	15	15	500
600					10	15	15	10	15	10	15	10	15	15	15	15	15	30	15	15	15	600
750									15				10	10	15	15	15	30	15	15	15	750
800									30										15			800
1000									30											15		1000
1200																						1200
1250																						1250
1500																						1500
1600																						1600
1800																						1800
2000																						2000
2500																						2500
3000																						3000
3200																						3200
4000																						4000
5000																						5000
6000																						6000
7500																						7500
primary conductor in mm										20 x 5	20 x 10	30 x 10	30 x 10	31 x 18	30 x 10	30 x 10	30 x 10	40 x 12	20 x 10	40 x 10	40 x 10	primary conductor in mm
round conductor in mm	14	21	21	22.5	21	22.5	42		106	17.5	19.2	28	26	26	28	28	23	26	20	32	32	round conductor in mm
transform. width in mm	45	45	44	49.5	50	61	71		190	49.5	61	50	61	61	61	61	95	61	71	71	71	transform. width in mm

(*) For the above mentioned summarized current transformers, snap-on mountings are available for fitment onto 35 mm DIN-rails (DIN 50022).

Accessories

Foot- and bus bar mounting screws complete with isolating caps (shock-proof) are included in the supplies. Sealed shutters, copper tubings, snap-on mountings and copper bus bars are available upon request. The transformers are being supplied with integrated secondary locking caps, (exceptions: ASK 31.6, ASK 41.6, ASK 51.6, ASK 61.6, WSK 31.5, WSK 70.6, ASR 201.3).

MBS Current Transformers Summarized

Plug-in Current Transformers

Page	59	61	64	65	67	68	70	72	73	74	75	78	82	84	85	86	87	88	89	Page		
Primary nominal current	ASK 412.4	ASK 41.6	ASK 541.4	ASK 51.4	ASK 51.6	ASK 561.4	ASK 61.4	ASK 61.6	ASK 63.4	ASK 63.6	ASK 81.4	ASK 83.4	ASK 101.4	ASK 103.3	ASK 103.41	ASK 105.6	ASK 105.6N	ASK 123.3	ASK 127.4	Primary nominal current		
	Accuracy classes for sec. 5 A and sec. 1 A with information of max. burden in VA																					
	NEW																					
A	0.5	1	0.5	1	0.5	1	0.5	1	0.5	1	0.5	1	0.5	1	0.5	1	0.5	1	0.5	1	A	
1																					1	
2.5																					2.5	
5																					5	
10																					10	
15																					15	
20																					20	
25																					25	
30				1.5																	30	
40				2.5																	40	
50	1.5	1.5	2.5	2.5																	50	
60	1.5	1.5	2.5	1.5	2.5																60	
75	2.5	5	5	2.5	2.5																75	
80	2.5	5	5	2.5	5																80	
100	1.5	3.75	10	10	5	10	2.5	2.5	5	5											100	
125				5	10																125	
150	2.5	5	15	15	5	10	2.5	2.5	10	10											150	
200	2.5	10	15	15	15	5	5	10	10		2.5	2.5	5	10							200	
250	5	10	15	15	15	5	5	10	15	15		5	2.5	2.5	10	15					250	
300	5	15	15	15	15	5	5	10	15	30	5	5	5	15	15	2.5	2.5				300	
400	10	15	15	15	10	15	10	15	15	30	5	5	5	5	5	5	5			2.5	5	400
500	10	15	15	15	15	30	10	15	15	30	5	15	15	10	10	5	5	5	10	2.5	5	500
600	10	15	30	30	30	30	15	15	15	30	10	15	15	10	15	10	5	10		2.5	5	600
750	15	30	30	30	30	30	10	15	15	30	10	15	15	10	15	10	10	2.5	10	2.5	5	750
800	15	30	30	30	30	30	15	30	15	45	15	30	15	15	15	15	15	10	15	5	15	800
1000		30	45	15	30	15	30	30	45	15	30	30	30	45	15	15	15	30	15	15	10	1000
1200					15	30	30	45	15	30	30	30	45	15	15	30	15	30	15	15	15	1200
1250					15	30	30	45	15	30	30	30	45	15	15	15	30	15	30	10	15	1250
1500										30	30	30	45	15	15	15	30	15	45	15	30	1500
1600										30	30	30	45	15	15	15	30	15	45	30	30	1600
1800											15	15		15	30	15	45			15	30	1800
2000											15	15	30	30	15	45	30	45	15	30	30	2000
2500												15	30	30	45	30	45			30	45	2500
3000															30	45			30	45	30	3000
3200																						3200
4000																			30	45	30	4000
5000																			30	45		5000
6000																						6000
7500																						7500
primary conductor in mm	40 x12	40x12	40x10	50x12	50x12	60x10	63x10	60x10	60x30	60x30	80x10 60x30 2x60x10	84x34	100x10	2x100x10	103x41	100x55	100x55	123x30	120x70	primary conductor in mm		
round conductor in mm	30.5	32	32	44	40	44	44	40	44	30	55	34	70	85	40	55	55	100	70	round conductor in mm		
transform. width in mm	71	95	86	86	95	86	96	95	96	88	120	96	130	172	99	129	129	172	159	transform. width in mm		

Plug-in current transformers class 0.2s which can be supplied upon request:

ASR 22.3, ASK 21.3, ASK 31.3, ASK 31.4, ASK 41.4, ASK 541.4, ASK 51.4, ASK 61.4,
ASK 81.4, ASK 105.6, ASK 123.3, ASK 130.3, ASK 130.5

MBS Current Transformers Summarized

Plug-in Current Transformers					Wound Current Transformers								Split Core Current Transformers				Summation Current Transformers					
Page	90	92	93	94	95	99	100	101	102	103	104	105	108	108	109	109	114	115	118	Page		
Primary nominal current	ASK 127.6	ASK 128.4	ASK 129.10	ASK 130.3	ASK 130.5	WSK 30 (*)	WSK 40 (*)	WSK 40 N (*)	WSK 60	WSK 70.6	WSK 70.6 N	WSK 31.5	KBU 23	KBU 58	KBU 812	KBU 816	KSU 2...3	SUSK 3...8	NH			
	Accuracy classes for sec. 5 A and sec. 1 A with information of max. burden in VA																				Primary nominal current	
A	0.5	1	0.5	1	0.5	1	0.5	1	0.5	1	0.5	1	0.5	1	0.5	1	0.5	1	0.5	1	A	
1							2.5	5	15	15								15	30	15	30	1
2.5							2.5	5	15	15												2.5
5							2.5	5	15	15		10	15					15	30	15	30	5
10							2.5	5	15	15		10	15									10
15							2.5	5	15	15		10	15									15
20							2.5	5	15	15		10	15									20
25								15	15		10	15	10	15	10	15	15	15				25
30								10	10	10	10	15	10	15	10	15	15	15	2...3	3...8		30
40								10	10			10	15	10	15	15	15		current circuits	current circuits		40
50								10	10			10	15	10	15	15	15					50
60												10	15	10	15	15	15					60
75												10	15	10	15	15	15					75
80												10	15	10	15	15	15					80
100											10	15	10	15	15	15	1.25					100
125													15	15								125
150													15	15								150
200														1.5								200
250														1.5	1	1.5	1	1.5				250
300					5	5	10	10					1.5	3.75	1.5	2.5	1.5	2.5				300
400		2.5	5		10	10	10	10					2.5	5	1.5	2.5	1.5	2.5				400
500		2.5	5		10	10	15	15							2.5	5	2.5	5				500
600		2.5	5		10	15	15	15							2.5	5	2.5	5				600
750		2.5	5		15	15	15	15							2.5	5	2.5	7.5				750
800		5	10												2.5	5	2.5	7.5				800
1000	5	10	10	15	5	15	15	30	30					5	10	5	10	10	15			1000
1200	10	15	10	15	10	15	15	30	30	30						5	10	10	15			1200
1250	30	30	10	15	10	15	15	30	30	30							7.5	10				1250
1500	30	30	15	30	30	30	30	30	30	30							7.5	15	15	15		1500
1600					30	30	30	30	30	30									15	15		1600
1800	30	30			30	30																1800
2000	30	45	15	30	30	30		30	30									15	15			2000
2500	30	45	15	30	45	45		30	30									15	15			2500
3000	30	45			45	45		30	30									15	30			3000
3200					30	45																3200
4000	30	45		45	45													30	30			4000
5000	30	45			30													30	30			5000
6000	30	45		45	45																	6000
7500				45	45																	7500
primary conductor in mm	120x72	128x38	120x90	130x25	130x30								20x30	50x80	80x120	80x160					primary conductor in mm	
round conductor in mm	72	38	90	25	30								20	50	80	80					round conductor in mm	
transform. width in mm	205	100	250	180	180	61	71	71	71	60	60	70	93	125	155	195	57	65			transform. width in mm	

(*) For the above mentioned summarized current transformers, snap-on mountings are available for fitment onto 35 mm DIN-rails (DIN 50022).

Accessories

Foot- and bus bar mounting screws complete with isolating caps (shock-proof) are included in the supplies. Sealed shutters, copper tubings, snap-on mountings and copper bus bars are available upon request. The transformers are being supplied with integrated secondary locking caps, (exceptions: ASK 31.6, ASK 41.6, ASK 51.6, ASK 61.6, WSK 31.5, WSK 70.6, ASR 201.3).

MBS Current Transformers Summarized

Protection Current Transformers

Page	125	126	127	128	132	133	134	136	140	142	144	148	150	152	153	Page	
Primary nominal current	SASR 22.3 (*)	SASK 21.3 (*)	SASK 31.5 (*)	SASK 31.6	SASK 421.4	SASK 41.4	SASK 41.6	SASK 41.10	SASK 541.4	SASK 51.4	SASK 51.6	SASK 61.4	SASK 61.10	SASK 63.6	SASK 105.6	Primary nominal current	
	Accuracy classes for sec. 5 A and sec. 1 A with information of max. burden in VA																
	A	SP5	10P5	SP5	10P5	SP5	10P5	SP5	10P5	SP10	10P10	SP4	SP5	10P5	SP5		10P5
50							2.5	2.5								50	
60							2.5	2.5	1.5	1.5						60	
75					1											75	
80					1	2.5	2.5		1.5							80	
100		1			1.5	1.5	5	5	1.5	2.5						100	
120																120	
125	1.5	1.5	1	1.5	1.5	1.5										125	
150	1.5	1.5	1.5	1.5	1.5	1.5	7.5	7.5	2.5	2.5						150	
200	1.5	1.5	1.5	1.5	1.5	2.5	10	10	2.5	5	2.5	2.5	2.5	2.5	2.5	200	
250	1.5	1.5			2.5	2.5	10	10	5	5	2.5	2.5	2.5	2.5	2.5	250	
300	1.5	1.5			2.5	2.5	10	10	5	5	2.5	2.5	2.5	2.5	2.5	300	
400					2.5	2.5	15	15	5	5	2.5	2.5	2.5	2.5	2.5	400	
500					2.5	2.5	15	15	7.5	7.5	2.5	2.5	2.5	2.5	2.5	500	
600					2.5	2.5	15	15	7.5	10						600	
750					1.5	5										750	
800																800	
1000																1000	
1200																1200	
1250																1250	
1500																1500	
1600																1600	
1800																1800	
2000																2000	
2500																2500	
3000																3000	
4000																4000	
5000																5000	
6000																6000	
7500																7500	
primary conductor in mm	20 x 10		30 x 10		30 x 10		20 x 10		40 x 10		40 x 12		40 x 10		40 x 10		primary conductor in mm
round conductor in mm	22.5		19.2		28		23		20		32		32		32		round conductor in mm
transform. width in mm	61		61		61		95		71		71		95		150		transform. width in mm

(*) For the above mentioned summarized current transformers, snap-on mountings are available for fitment onto 35 mm DIN-rails (DIN 50022).

Accessories

Foot- and bus bar mounting screws complete with isolating caps (shock-proof) are included in the supplies. Sealed shutters, copper tubings, snap-on mountings and copper bus bars are available upon request. The transformers are being supplied with integrated secondary locking caps, (exceptions: SASK 31.6, SASK 41.6, SASK 51.6, SASK 61.6).

MBS Current Transformers Summarized

Current Transformers for Tariff Application

Page	166	167	168	169	170	171	172	174	175	176	177	178	179	182	Page
	EASR 14.3 (*)	EASR 22.3 (*)	EASK 21.3 (*)	EASK 31.3 (*)	EASK 31.4 (*)	EASK 31.5 (*)	EASK 31.6	EASK 41.4 (*)	EASK 41.5 (*)	EASK 41.6	EASK 541.4	EASK 51.4	EASK 51.6	EASK 61.4	
Primary nominal current	Accuracy classes for sec. 5 A and sec. 1 A with information of max. burden in VA														Primary nominal current
	NEW								NEW						
A	0.2 0.5(s)	0.2 0.5(s)	0.2 0.5(s)	0.2 0.5(s)	0.2(s) 0.5(s)	0.2 0.5(s)	0.2 0.5(s)	0.2 0.5(s)	0.2 0.5(s)	0.2 0.5(s)	0.2 0.5(s)	0.2 0.5(s)	0.2 0.5(s)	0.2 0.5(s)	A
1															1
2.5															2.5
5															5
10															10
15															15
20															20
25															25
30															30
40															40
50							2.5								50
60															60
75	1.5					2.5	5		2.5	5	2.5				75
80	1.5								2.5						80
100	1.5 1.5	1.5 2.5	1.5 2.5	1.5 2.5	2.5 2.5	2.5 2.5	5 5	10 1.5	2.5 2.5	2.5 10	2.5 5		2.5 2.5	5	100
120	1.5 2.5														120
125	2.5 2.5								2.5 2.5						125
150	2.5 2.5	2.5 5	2.5 5	1.5 2.5	2.5 5	5 5	5 5	15 2.5	5 2.5	5 15	5 10	1.5 2.5	5 10		150
200		5 5	5 5	5 5	5 5	5 10	10 10	15 5	5 5	5 15	10 15	5 5	5 10	2.5 2.5	200
250		5 5	5 5	5 5	5 5	5 10	10 15	10 15	5 10	10 15	10 15	5 10	10 15	5 5	250
300		5 10	5 10	5 10	5 10	10 10	15 10	10 15	10 15	15 15	15 15	5 10	15 15	5 10	300
400		10 10	10 10	5 10	5 10	10 10	15 15	10 15	10 15	15 15	15 15	10 10	10 15	10 10	400
500		10 10	10 10	5 10	5 10	10 10	15 15	10 15	15 15	15 15	15 15	10 10	10 15	10 15	500
600		10 10		5 10	5 10	15 10	15 15	15 30	15 15	15 15	15 30	10 15	15 15	15 15	600
750				5 10	5 10	15 10	15 15	15 30	15 15	15 15	15 30	15 15	15 15	15 15	750
800									15 15						800
1000									15 15	15 30	15 30	15 15	15 30	10 30	1000
1200													15 30	15 15	1200
1250													15 30	15 30	1250
1500														15 30	1500
1600															1600
1800															1800
2000															2000
2400															2400
2500															2500
3000															3000
3200															3200
4000															4000
5000															5000
6000															6000
7500															7500
primary conductor in mm			20 x 10	30 x 10	30 x 10	30 x 10	30 x 10	40 x 10	40 x 10	40 x 12	40 x 10	50 x 12	50 x 12	60 x 10	primary conductor in mm
				2 x 20 x 10	2 x 20 x 10	2 x 20 x 10	20 x 13	2 x 30 x 5	2 x 30 x 5	30 x 15	2 x 30 x 5	2 x 40 x 10	40 x 30	2 x 50 x 10	
round conductor in mm	14	22.5	19.2	26	28	28	23	32	32	32	32	44	40	44	round conductor in mm
transformer width in mm	44	61	61	61	61	61	95	71	71	95	86	86	95	96	transformer width in mm

(*) For the above mentioned summarized current transformers, snap-on mountings are available for fitment onto 35 mm DIN-rails (DIN 50022).

Accessories

Foot- and bus bar mounting screws complete with isolating caps (shock-proof) are included in the supplies. Sealed shutters, copper tubings, snap-on mountings and copper bus bars are available upon request. The transformers are being supplied with integrated secondary locking caps, (exceptions: EASK 31.6, EASK 41.6, EASK 51.6, EASK 61.6, WSK 31.5).

MBS Current Transformers Summarized

Current Transformers for Tariff Application

Page	183	184	185	188	189	190	191	194	195	Page
	EASK 61.6	EASK 63.6	EASK 81.4	EASK 105.6	EASK 123.3	EASK 130.3	EASK 130.5	EWSK 31.5	ESUSK 2...8	
Primary nominal current	Accuracy classes for sec. 5 A and sec. 1 A with information of max. burden in VA									Primary nominal current
A	0.2 0.5(s)	0.2 0.5(s)	0.2 0.5(s)	0.2 0.5(s)	0.2 0.5(s)	0.2 0.5(s)	0.2 0.5(s)	0.2 0.5(s)	0.2	A
1										1
2.5										2.5
5									10	5
10										10
15										15
20										20
25								10 15		25
30								10 15		30
40								10 15		40
50								10 15		50
60								10 15		60
75								10 15		75
80										80
100								10 15		100
120										120
125										125
150								10 15		150
200	2.5 5								2...8	200
250	5 10	2.5 5							current	250
300	10 15	5 10							circuits	300
400	10 15	10 10	5 10			2.5 5	2.5 10			400
500	10 15	10 15	10 10			2.5 5	2.5 10			50
600	10 30	15 15	10 15	5 5		5 5	5 10			600
750	15 15	15 30	10 15	10 10	10	5 10	10 15			750
800										800
1000	15 30	15 30	10 15	15 15	5 10	5 15	15 30			1000
1200	15 30	15 30	10 15	15 15	10 15	10 15	15 30			1200
1250	15 30	15 30	15 15	15 30	15 15	15 15	15 30			1250
1500	15 30	15 30	15 15	30 30	15 30	15 30	15 30			1500
1600				30 30	15 30	15 30	15 30			1600
1800										1800
2000				30 30	15 30		30 30			2000
2400							30 30			2400
2500				30 30	15 30		30 30			2500
3000				30 30	30 45		30 30			3000
3200										3200
4000										4000
5000										5000
6000										6000
7500										7500
primary conductor in mm	60 x 10	60 x 30	80 x 10	100 x 55	123 x 30	130 x 25	130 x 30			primary conductor in mm
	50 x 30		60 x 30		3x100x10					
round conductor in mm	40	30	55	55	100	25	30			round conductor in mm
transformer width in mm	95	88	120	129	172	180	180	70	65	transformer width in mm

(*) For the above mentioned summarized current transformers, snap-on mountings are available for fitment onto 35 mm DIN-rails (DIN 50022).

Accessories

Foot- and bus bar mounting screws complete with isolating caps (shock-proof) are included in the supplies. Sealed shutters, copper tubings, snap-on mountings and copper bus bars are available upon request. The transformers are being supplied with integrated secondary locking caps, (exceptions: EASK 31.6, EASK 41.6, EASK 51.6, EASK 61.6, WSK 31.5).

Current transformers – Technical characteristics

Current transformers are special transformers for the proportional transformation of high currents into directly measurable values. Their construction and physical operating principle enables a galvanic separation of the primary circuit from the measured circuit, thereby providing a protection for sequentially connected instruments in the event of a fault.

Rated limit current [I _{PL}]	value of the lowest primary current where, by the secondary measuring burden, the total deviation of the current transformer for measuring purposes is equal to or greater than 10 %.
Rated current intensity [I _N]	is the noted specified value of the primary and secondary current on the rating plate. Standardized primary nominal currents have the following values: 5 A, 10 A, 15 A, 20 A, 25 A, 30 A, 40 A, 50 A, 60 A, 75 A, 100 A with a decadic multiple of the previously mentioned value to a max. of 7500 A. Standardized secondary nominal currents have the values 5 A and 1 A.
Rated power	the value of the apparent power (in a VA specified power factor), which the current transformer is intended to supply to the secondary circuit and rated burden at the rated secondary current.
Earthing of secondary terminals	according to VDE 0141, section 5.3.4., current- and voltage transformers have to be earthed, starting from U _m = 3.6 kV. With low voltage (up to U _m = 1.2 kV) no earthing is required, as long as the transformer housings have no visible exposed metal surfaces.
Phase displacement error [δ]	signifies the phase shift of the primary current and the secondary current. The direction of the indicator is arranged in such a way, that with an optimum produced current transformer the phase displacement error is equal to zero (IEV 321-01-23 modified). The phase displacement error is to be regarded as positive when the indicator of the secondary current is ahead compared to the indicator of the primary current. The phase displacement error is specified in minutes or hundredths of a radiant. Note: Strictly speaking this definition is only valid for sinus type currents.
Accuracy class	the denotation for a current transformer whose measuring deviation remains below the prescribed operating condition.
Total measuring deviation (Current error)	is the effective value in stationary position, and the difference between: a) the momentary value of the primary current and b) the momentary value of the measuring transmission of the multiplied actual secondary current, whereby the positive indicators of the primary and secondary current correspond to the accord for the connection denotation. The total deviation F _I is generally rendered in the percentages of the effective value of the primary current, as per the following mathematical equation.
$F_I = \frac{100}{I_P} \sqrt{\frac{1}{T} \int_0^T (K_N i_s - i_P)^2 dt}$	
F_I = total measuring deviation in % K_N = rated measuring transmission I_P = effective value of the primary current i_P = momentary value of the primary current i_S = momentary value of the secondary current T = duration of period	
Max. voltage for electrical equipment U_m	this denotes the highest constant permitted value for phase to phase voltage for which the current transformers isolation is rated.
Burden	the impedance of the secondary current is declared in ohms and power factor. The burden is usually expressed as the apparent power in voltamperes, absorbed at a specified power-factor and at the rated secondary current.
Rated burden	the value of the burden upon which the accurate requirements of this specifications are based.
Rated surge current [I _{DYN}]	peak value of the primary current, whose electro-mechanical impact is resisted by the current transformer with short circuited secondary winding. The value of the nominal search current I _{DYN} has to be 2.5 x I _{TH} . Only when there is a deviation from this value, the rating plate has to state I _{DYN} .
Actual transformation ration	is the ratio of the primary nominal current to the secondary current. It is specified as an unabridged break on the rating plate.

Open circuit voltage of current transformers

Current transformers, which are not directly encumbered with a burden, are generally secondarily short circuited. A secondary open current transformer operates like a loaded one with an almost infinitely high burden. The curve shape of the secondary current is extremely deformed and under certain conditions voltage surges occur which can be harmful to human beings. The amount of the induced "loss motion" depends on the core cross-section and the number of secondary turns. For MBS current transformers of lower ratings and with a nominal transmission ratio up to 500/5, the peak value of this voltage is $\hat{U} \leq 200 \text{ V}$. For reasons of hazard protection and to prevent magnetization of the iron core, an open secondary circuit is to be avoided.

Bus bar cross section

The openings of our individual plug-in transformers for the acceptance of primary bus bars or their cross-sections – even when supplied with copper bus bars – are not decisive for the dimensioning of the bus bar units. The cross section of the bus bar is permitted to be smaller over a short distance in the transformer area, provided the adjacent bus bar cross sections are dimensioned in such a manner that any possible excess heat can easily be absorbed.

Special configurations

Saturation transformers	upon request
Tropicalized versions	upon request
Primary nominal currents deviating from the standard series	upon request
Secondary change-over units	refer to the relevant types of ct's
Deviating frequency (16 ² / ₃ Hz up to 400 Hz)	upon request
Resin hardened for extreme mechanical demands (shakeproof)	upon request

Current error

is the percentage deviation of the nominal transmission multiplied by the secondary current from that of the primary current. The current error is calculated positively, should the actual value of the secondary current exceed the nominal value.

$$F_I = \frac{I_S K_N - I_P}{I_P} 100 \%$$

F_I = current error in %

I_P = primary current in A (effective value)

I_S = secondary current in A (effective value)

K_N = rated measuring ratio

Thermal nominal continuous rated current [I_D]

is the primary current which allows the continuous operation of the current transformer. When using this current value, the temperature of the secondary wiring must not exceed the prescribed values mentioned in the actual technical norms. These values are in direct relation to the isolation material class. Should a thermal rated current be defined which is larger than the primary rated current, the preference values of 120 %, 150 % and 200 % should reflect those of the primary rated current.

Thermal rated short-time current [I_{TH}]

This value indicates the effective value of the primary current which the current transformers can withstand with short circuited secondary winding. Other rated measuring values as 1 s, e.g. 0.5s, 2s and 3s are acceptable. The thermal short time rated current I_{th} has to be stated for each current transformer.

Over-current rated limiting factor (FS)

is the ratio of the limit rated current to the primary rated current.

Note 1: It ought to be noted that the actual over-load rated current is influenced by the burden.

Note 2: Should the primary winding of the current transformer be short-circuited, the safety is greatest, when the value of the over-load current limit factor "FS" is small.

The excess current limiting factor is indicated on the rating plate of a measuring transformer with a nominal value after the letters "FS".

The specification "FS 5" signifies that the total measurement deviation of the current transformer with 5 times the primary nominal current arising from the magnetic saturation of the iron core amounts at least at to 10 %.

Important:

All MBS current transformers are in accordance with DIN EN 60044/1 for a thermal nominal current of $I_d = 1.0 \times I_N$.

MBS current transformer range for tariff applications

In addition to a comprehensive selection of standard current transformers in the accuracy classes 0.5 and 1, MBS AG manufactures an extensive product range of tariff transformers for currents between 25 A and 3200 A in the classes 0.2s, 0.2, 0.5s, and 0.5.

These approved current transformers have the national certificate of Germany and of several European countries.

The current transformers which have been approved by the Physikalisch Technische Bundesanstalt (PTB) Braunschweig (an authorized German testing laboratory) are recognizable by a stylized  plus a construction series number. An "E" is placed before the usual MBS type mark.

The calibration of the transformers is documented by an official lead seal as well as an additional affixed yellow calibration stamp. The fees for the calibration are calculated in accordance with the applicable official regulation.

The calibration of the transformers is performed upon request at the
"Staatlich anerkannte Prüfstelle für Messgeräte für Elektrizität EA90"
 State Approved Testing Laboratories for Measuring Appliances for Electricity EA90
 as represented by MBS AG.

Configuration of MBS low voltage current transformers



All at MBS AG manufactured low voltage current transformers correspond to DIN VDE 0414/1; DIN 42600; and DIN EN 60044/1 edition 12/2003 as well as regulation VBG 4.

Characteristics of the current transformers:

- unbreakable plastic housings
- black polycarbonate
- flame resistant
- self-extinguishing
- transformer housings are ultrasonically welded
- nickel-plated secondary terminals
with plus-minus nickel-plated screw M 5x10 mm
- integrated secondary locking caps.

Foot angle and bus bar mounting screws with isolating protection caps (protection-proof) are supplied free of charge. All transformers are suitable for use on massive primary conductors as well as on flexible isolated copper strips.

Isolating protecting cap



M 1:1



Bus bar mounting screw,
screw length (L)
25, 32, 36, 46, 54, 80 mm,
torque 0.5 Nm

General technical specifications:

Nominal frequency	50 Hz (16 ² /3 Hz up to 400 Hz upon request)
Isolation class	E
Thermal nominal short-time current	$I_{th} = 60 \times I_N$
Maximum operating voltage	$U_m \leq 0.72 \text{ kV}$
Over-current limiting factor	FS 5 up to 1500 A nominal current FS 10 from 1600 A nominal current
Secondary nominal current	5 A or 1 A
Operating temperature	$-5^\circ\text{C} \leq \vartheta \leq +40^\circ\text{C}$
Storage temperature	$-25^\circ\text{C} \leq \vartheta \leq +70^\circ\text{C}$

Error limit values for measuring transformers for classes 0.2 3 according to DIN IEC 60044/1

Class accuracy	Current error $\pm \partial_F$ by					Phase displacement error $\pm \partial_F$ by				
	1.2 I_N 1.0 I_N	0.2 I_N	0.1 I_N	0.05 I_N	0.01 I_N	1.2 I_N 1.0 I_N	0.2 I_N	0.1 I_N	0.05 I_N	0.01 I_N
	%	%	%	%	%	min	min	min	min	min
0.2	0.2	0.35		0.75		10	15		30	
0.2s	0.2	0.2		0.35	0.75	10	10		15	30
0.5	0.5	0.75		1.5		30	45		90	
0.5s	0.5	0.5		0.75	1.5	30	30		45	90
1	1	1.5		3		60	90		180	
3	3					120.0*				

* by 0.5 I_N and thermal nominal continuous current

Error limit values for current transformers for protection applications

Class accuracy	Current error $\pm F_I$ by				Phase displacement error $\pm F_I$ by			
	1.0 I_N and thermal nominal continuous current	0.5 I_N	0.2 I_N	0.05 I_N	1.0 I_N and thermal nominal continuous current	0.5 I_N	0.2 I_N	0.05 I_N
	%	%	%	%				
5 P ...	1		1.5	3	60		90	120
10 P ...	3	3			120	120		

Current error F_g at nominal error current limit and nominal burden class 5P ... $\leq 5\%$
class 10P ... $\leq 10\%$

Maximum permissible current of copper bus bars Dimensions and current values according to DIN 43671

Bus bar cross section	1 bus bar	2 bus bars	3 bus bars
20 x 10	427 A	825 A	1180 A
30 x 05	379 A	672 A	896 A
30 x 10	573 A	1060 A	1480 A
40 x 05	482 A	836 A	1090 A
40 x 10	715 A	1290 A	1770 A
50 x 10	852 A	1510 A	2040 A
60 x 10	985 A	1720 A	2300 A
80 x 10	1240 A	2110 A	2790 A
100 x 10	1490 A	2480 A	3260 A
bus bar surface		clear	

Above values are valid for continuous current burden at approx. 30 °C ambient temperature.

Markings of the current transformers connection terminals

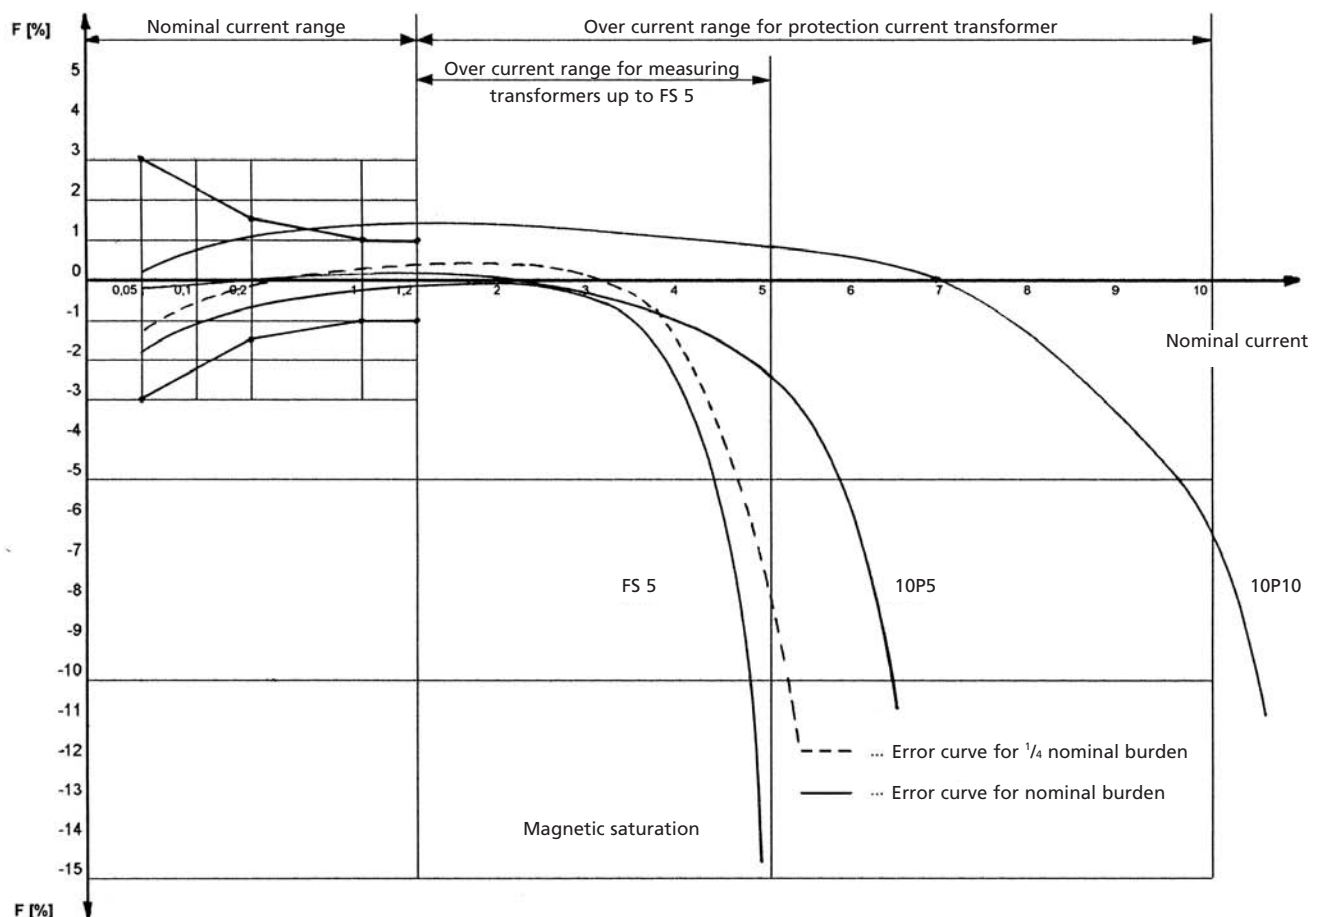
The connections of all primary windings are marked with capital letters "K-P₁", and "L-P₂".

The connections of all secondary windings are marked with the corresponding lower case letters "k-s₁" and "l-s₂".

By current transformers with a multiple secondary windings the winding end is marked "I", followed by the prefix letter "I₁", the windings with a decreasing number of windings are sequentially numbered "2", "3" etc.

By current transformers with a multiple of independent primary windings, the terminals of the individual windings are distinguishable from the additional capital letters set before "K" and "L" and the additional capital letters "A", "B", "C" etc.; i.e. "AK" – "AL" for the highest primary circuit, "BK" – "BL" for the second primary circuit etc.; or on each terminal pair the transmission or the ratio transmission of the individual primary windings to each other is to be specified.

Error curves of low voltage current transformers



Power requirements of measuring units and relays

Two main requirements are cited by the user for the principle demands of current transformers:

- a high degree of measuring precision in the range of nominal current
- a protection function in the over-load range

In order to fulfill these demands it is necessary for the assumed nominal power of a current transformer to fully achieve the actual power requirements of the prescribed measurements.

In ascertaining the actual power requirements, consideration is to be given to power losses of the appliances to be connected, as well as to the losses of the measuring conductor.

Power requirements of typical measuring units

Current meter soft ironed up to 100 mm Ø	0.700	–	1.500 VA
Rectifier current meter	0.001	–	0.250 VA
Multi-range current meter	0.005	–	5.000 VA
Current recorder	0.300	–	9.000 VA
Bimetal current meter	2.500	–	3.000 VA
Power meter	0.200	–	5.000 VA
Power recorder	3.000	–	12.000 VA
Power factor meter	2.000	–	6.000 VA
Power factor recorder	9.000	–	16.000 VA
Energy meter (current path)	0.400	–	1.000 VA
Relay			14.000 VA
N-relay			
Over current relay	0.200	–	6.000 VA
Over current time relay	3.000	–	6.000 VA
Direction relay			10.000 VA
Bimetal relay	7.000	–	11.000 VA
Distance relay	1.000	–	30.000 VA
Differential relay	0.200	–	2.000 VA
	1.000	–	15.000 VA
Transformer current trip switch	5.000	–	150.000 VA
Controler	5.000	–	180.000 VA

Power consumption of copper wires

$$P = \frac{I^2 \times 2l}{q_{cu} \times 56} \text{ [VA]}$$

I = secondary nominal current
 l = distance in m
 q_{cu} = wire cross section in mm²

Comment: With a joint three phase current return conductor the values of P are halved.

Chart for values referring to 5 A

Nominal cross section	1 m	2 m	3 m	4 m	5 m	6 m	7 m	8 m	9 m	10 m
2.5 mm ²	0.36	0.71	1.07	1.43	1.78	2.14	2.50	2.86	3.21	3.57
4.0 mm ²	0.22	0.45	0.67	0.89	1.12	1.34	1.56	1.79	2.01	2.24
6.0 mm ²	0.15	0.30	0.45	0.60	0.74	0.89	1.04	1.19	1.34	1.49
10.0 mm ²	0.09	0.18	0.27	0.36	0.44	0.54	0.63	0.71	0.80	0.89

Chart for values referring to 1 A

Nominal cross section	10 m	20 m	30 m	40 m	50 m	60 m	70 m	80 m	90 m	100 m
1.0 mm ²	0.36	0.71	1.07	1.43	1.78	2.14	2.50	2.86	3.21	3.57
2.5 mm ²	0.14	0.29	0.43	0.57	0.72	0.86	1.00	1.14	1.29	1.43
4.0 mm ²	0.09	0.18	0.27	0.36	0.45	0.54	0.63	0.71	0.80	0.89
6.0 mm ²	0.06	0.12	0.18	0.24	0.30	0.36	0.42	0.48	0.54	0.60
10.0 mm ²	0.04	0.07	0.11	0.14	0.18	0.21	0.25	0.29	0.32	0.36

Tube current transformers, series ASR



www.mbs-stromwandler.de

Low voltage current transformers for industrial applications

Tube current transformers

ASR 14.3
NEW

Round conductor
Transformer width

Ø 14 mm
45 mm

ASR 20.3

Round conductor
Transformer width

Ø 21 mm
45 mm

ASR 201.3

without locking cap

Round conductor
Transformer width

Ø 21 mm
44 mm

ASR 21.3

Round conductor
Transformer width

Ø 22.5 mm
49.5 mm

ASR 21.5

Round conductor
Transformer width

Ø 21 mm
50 mm


ASR 22.3
ASR 22.3 2U


Round conductor
Transformer width

Ø 22.5 mm
61 mm

ASR 42.45

Round conductor
Transformer width
Transformer depth





Ø 42 mm
71 mm
45 mm

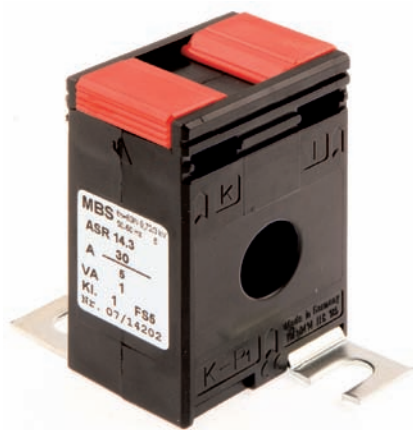


ASR 14.3

Tube current transformer

Secondary current		5A		1A	
Primary current A	Burden VA	Accuracy class		Accuracy class	
		1	0.5	1	0.5
		Art.-no.	Art.-no.	Art.-no.	Art.-no.
30	1	26080		26280	
40	1	26081		26281	
50	1.5	26082		26282	
60	1.5	26083		26283	
75	1.5	26084		26284	

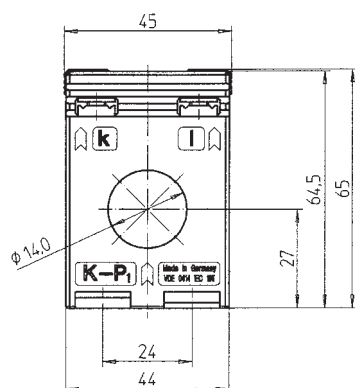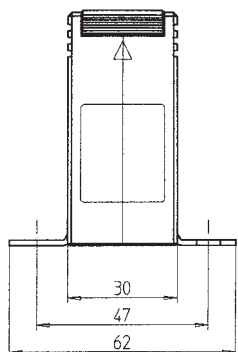




Snap-on mounting

Primary conductor	
Round conductor	Ø 14.0 mm
Transformer width	45 mm
Snap-on mounting	Art.-no. 55013 see page 204
Sealed shutter	—
Copper tubes	see page 204




ASR 20.3

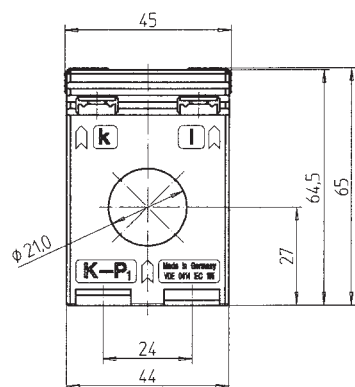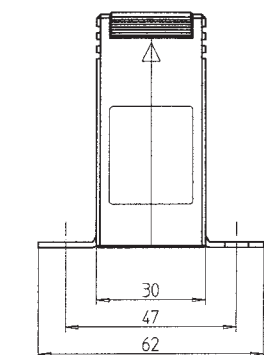Tube current transformer



Secondary current		5A			1A		
Primary current A	Burden VA	Accuracy class			Accuracy class		
		3	1	0.5	3	1	0.5
		Art.-no.	Art.-no.	Art.-no.	Art.-no.		
50	1	26027			26227		
60	1		26028			26228	
	1.25	26029			26229		
75	1.25		26030			26230	
	1.5		26031			26231	
80	1.25		26032			26232	
	1.5		26033			26233	
100	1.5		26034	26011		26234	26211
	2.5		26035			26235	
125	1.5		26036	26013		26236	26213
	2.5		26037	26014		26237	26214
	3.75				26238		
150	1.5		26039	26015		26239	26215
	2.5		26040	26016		26240	26216
	3.75		26041			26241	
200	1.5		26042	26017		26242	26217
	2.5		26043	26018		26243	26218
	3.75		26044	26019		26244	26219
250	2.5		26045	26020		26245	26220
	5		26046	26021		26246	26221
300	2.5		26048	26022		26248	26222
	5		26049	26023		26249	26223






Snap-on mounting

Primary conductor	
Round conductor	Ø 21.0 mm
Transformer width	45 mm
Snap-on mounting	Art.-no. 55013 see page 204
Sealed shutter	—
Copper tubes	see page 204




ASR 201.3

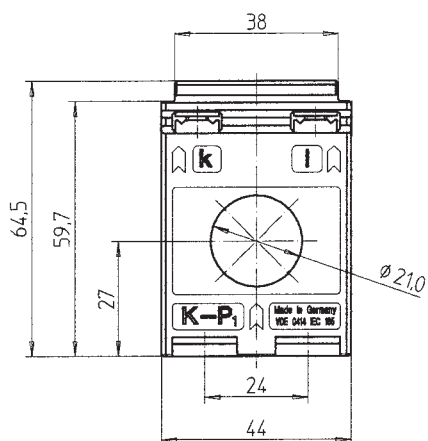Tube current transformer



Secondary current		5A			1A		
Primary current A	Burden VA	Accuracy class			Accuracy class		
		3	1	0.5	3	1	0.5
		Art.-no.	Art.-no.	Art.-no.	Art.-no.		
50	1	27027			27227		
60	1		27028			27228	
	1.25	27029			27229		
75	1.25		27030			27230	
	1.5		27031			27231	
80	1.25		27032			27232	
	1.5		27033			27233	
100	1.5		27034	27011		27234	27211
	2.5		27035			27235	
125	1.5		27036	27013		27236	27213
	2.5		27037	27014		27237	27214
	3.75				27238		
150	1.5		27039	27015		27239	27215
	2.5		27040	27016		27240	27216
	3.75		27041			27241	
200	1.5		27042	27017		27242	27217
	2.5		27043	27018		27243	27218
	3.75		27044	27019		27244	27219
250	2.5		27045	27020		27245	27220
	5		27046	27021		27246	27221
300	2.5		27048	27022		27248	27222
	5		27049	27023		27249	27223






Snap-on mounting

Primary conductor	
Round conductor	Ø 21.0 mm
Transformer width	44 mm
Snap-on mounting	Art.-no. 55013 see page 204
Sealed shutter	—
Copper tubes	see page 204




ASR 21.3

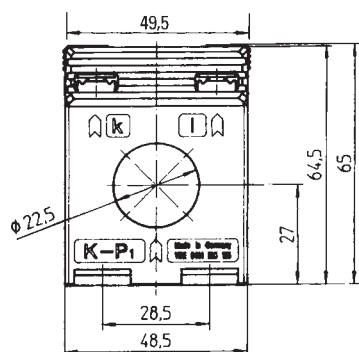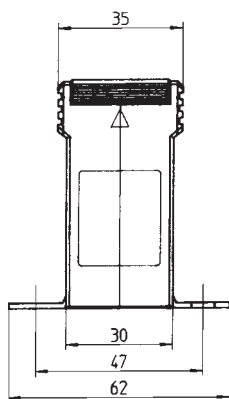Tube current transformer



Secondary current		5A	1A
Primary current A	Burden VA	Accuracy class	Accuracy class
		1	1
		Art.-no.	Art.-no.
100	1	1023	1223
150	1.5	1024	1224
200	1.5	1026	1226
	2.5	1027	1227
250	1.5	1028	1228
	2.5	1029	1229
	5	1030	1230
300	1.5	1031	1231
	2.5	1032	1232
	5	1033	1233
400	2.5	1034	1234
	5	1035	1235
	10	1036	1236
500	2.5	1037	1237
	5	1038	1238
	10	1039	1239
600	2.5	1040	1240
	5	1041	1241
	10	1042	1242






Snap-on mounting

Primary conductor	
Round conductor	Ø 22.5 mm
Transformer width	49.5 mm
Snap-on mounting	Art.-no. 55014 see page 204
Sealed shutter	—
Copper tubes	see page 204



ASR 21.5

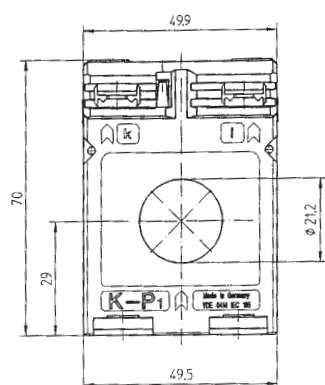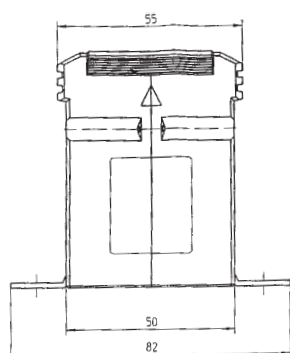Tube current transformer




Secondary current		5A		1A	
Primary current A	Burden VA	Accuracy class		Accuracy class	
		1	0.5	1	0.5
		Art.-no.	Art.-no.	Art.-no.	Art.-no.
50	1.5	93050	93011	93250	93211
	2.5	93051		93251	
60	1.5	93052	93012	93252	93212
	2.5	93053		93253	
	3.75	93054		93254	
75	1.5	93055	93013	93255	93213
	2.5	93056		93256	
	3.75	93057		93257	
80	1.5	93058	93014	93258	93214
	2.5	93059		93259	
	5	93060		93260	
100	1.5	93061	93015	93261	93215
	2.5	93062	93016	93262	93216
	5	93063		93263	
125	1.5	93064	93017	93264	93217
	2.5	93065	93018	93265	93218
	5	93066		93266	
150	2.5	93067	93019	93267	93219
	5	93068	93020	93268	93220
	10	93069		93269	
200	2.5	93070	93021	93270	93221
	5	93071	93022	93271	93222
	10	93072	93023	93272	93223
	15	93073		93273	
250	2.5	93074	93024	93274	93224
	5	93075	93025	93275	93225
	10	93076	93026	93276	93226
	15	93077		93277	
300	2.5	93078	93027	93278	93227
	5	93079	93028	93279	93228
	10	93080	93029	93280	93229
	15	93081	93030	93281	93230
400	2.5	93082	93031	93282	93231
	5	93083	93032	93283	93232
	10	93084	93033	93284	93233
	15	93085	93034	93285	93234
500	2.5	93086	93035	93286	93235
	5	93087	93036	93287	93236
	10	93088	93037	93288	93237
	15	93089	93038	93289	93238
600	2.5	93090	93039	93290	93239
	5	93091	93040	93291	93240
	10	93092	93041	93292	93241
	15	93093	93042	93293	93242

Primary conductor	
Round conductor	Ø 21.0 mm
Transformer width	50 mm
Snap-on mounting	—
Sealed shutter	—
Copper tubes	see page 204



ASR 22.3

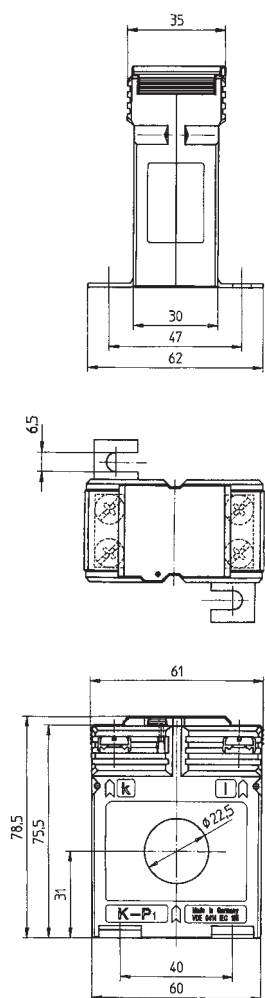Tube current transformer



Secondary current		5A			1A	
Primary current A	Burden VA	Accuracy class			Accuracy class	
		1	0.5	0.2s	1	0.5
		Art.-no.	Art.-no.	Art.-no.	Art.-no.	Art.-no.
40	1	3034			3234	
50	1	3035			3235	
	1.5	3036			3236	
60	1	3037			3237	
	1.5	3038			3238	
75	1.5	3039			3239	
	2.5	3040			3240	
80	1.5	3041			3241	
	2.5	3042			3242	
100	1.5	3043	3011	V04-1304C	3243	3211
	2.5	3044	3134		3244	3334
	3.75	3045			3245	
150	1.5	3046	3012	V04-1604C	3246	3212
	2.5	3047	3013	V04-1604D	3247	3213
	5	3048	3138		3248	3338
200	1.5		3014			3214
	2.5	3049	3015	V04-1704D	3249	3215
	5	3050	3016	V04-1704F	3250	3216
	10	3051			3251	
250	1.5		3017			3217
	2.5	3052	3018	V04-1804D	3252	3218
	5	3053	3019	V04-1804F	3253	3219
	10	3054	3020		3254	3220
	15	3055			3255	
300	2.5	3056	3022	V04-1904D	3256	3222
	5	3057	3023	V04-1904F	3257	3223
	10	3058	3024		3258	3224
	15	3059			3259	
400	2.5	3060	3025	V04-2004D	3260	3225
	5	3061	3026	V04-2004F	3261	3226
	10	3062	3027		3262	3227
	15	3063			3263	
500	2.5	3064	3028	V04-2104D	3264	3228
	5	3065	3029	V04-2104F	3265	3229
	10	3066	3030	V04-2104H	3266	3230
	15	3067			3267	
600	2.5	3068	3031	V04-2204D	3268	3231
	5	3069	3032	V04-2204F	3269	3232
	10	3070	3033	V04-2204H	3270	3233
	15	3071			3271	



ASR 22.3 2U

Primary conductor	
Round conductor	Ø 22.5 mm
Transformer width	61 mm
Snap-on mounting	Art.-no. 53011 see page 204
Sealed shutter	Art.-no. 59040 see page 205
Copper tubes	see page 204
Protection plug-in current transformer	see page 125
Current transformer for tariff applications	see page 167

Secondary current		5A	1A
Primary current A	Burden VA	Accuracy class	Accuracy class
		1	1
		Art.-no.	Art.-no.
200-100	5-2.5	3111	3311
300-150	5-2.5	3112	3312
	10-5	3113	3313
400-200	5-2.5	3114	3314
	10-5	3115	3315
500-250	5-2.5	3116	3316
	10-5	3117	3317
600-300	5-2.5	3118	3318
	10-5	3119	3319

ASR 42.45

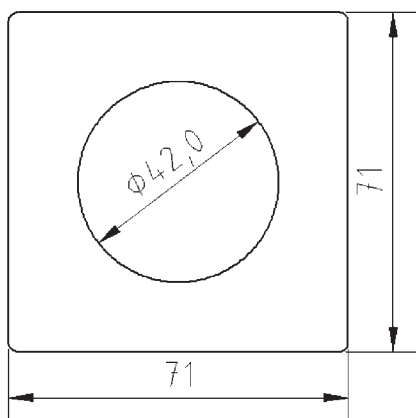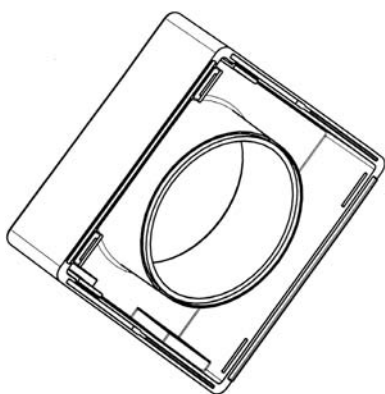Tube current transformer



Secondary current		5A	1A
Primary current A	Burden VA	Accuracy class 1	Accuracy class 1
		Art.-no.	Art.-no.
150	1.5	26500	26600
	2.5	26501	26601
200	1.5	26502	26602
	2.5	26503	26603
	5	26504	26604
250	1.5	26505	26605
	2.5	26506	26606
	5	26507	26607
	7.5	26508	26608
300	2.5	26509	26609
	5	26510	26610
	10	26511	26611
400	2.5	26512	26612
	5	26513	26613
	10	26514	26614
500	2.5	26515	26615
	5	26516	26616
	10	26517	26617
	15	26518	26618
600	2.5	26519	26619
	5	26520	26620
	10	26521	26621
	15	26522	26622
750	2.5	26523	26623
	5	26524	26624
	10	26525	26625
	15	26526	26626
800	5	26527	26627
	10	26528	26628
	15	26529	26629
	30	26530	26630
1000	5	26531	26631
	10	26532	26632
	15	26533	26633
	30	26534	26634

Connection cable 2.5 mm², 400 mm long.

The wire ends are complete with multi-bush wire ends.


Primary conductor	
Round conductor	Ø 42 mm
Transformer width	71 mm
Transformer depth	45 mm
Snap-on mounting	—
Sealed shutter	—

Tube current transformers

ASG 210.3

resin hardened

Round conductor
Transformer width




Ø 21 mm
44 mm

ASG 106

NEW

resin hardened



Round conductor
Transformer width



Ø 106 mm
190 mm

ASG 210.3

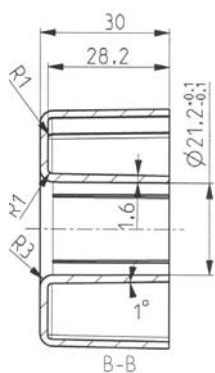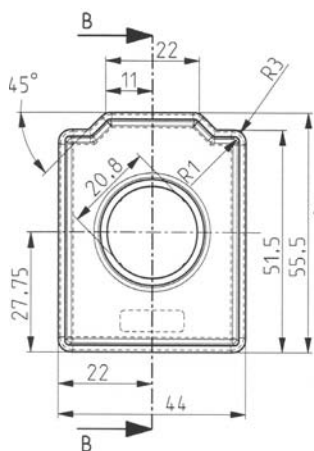Tube current transformer
resin hardened



Secondary current		5A	1A
Primary current A	Burden VA	Accuracy class 1	Accuracy class 1
		Art.-no.	Art.-no.
50	1	27500	27600
60	1	27501	27601
	1.25	27502	27602
75	1.25	27503	27603
	1.5	27504	27604
80	1.25	27505	27605
	1.5	27506	27606
100	1.5	27507	27607
	2.5	27508	27608
125	1.5	27509	27609
	2.5	27510	27610
	3.75	27511	27611
150	1.5	27512	27612
	2.5	27513	27613
	3.75	27514	27614
200	1.5	27515	27615
	2.5	27516	27616
	5	27517	27617
250	2.5	27518	27618
	5	27519	27619
	7.5	27520	27620
300	2.5	27521	27621
	5	27522	27622
	7.5	27523	27623

Connection cable 2.5 mm², 400 mm long.

Primary conductor	—
Round conductor	Ø 21 mm
Transformer width	44 mm
Snap-on mounting	—
Sealed shutter	—
Copper tubes	see page 204



ASG 106

Tube current transformer for panel boards

Features/benefits

- tube current transformer with 1...3 measuring systems integrated in one housing
- rated voltage 0.72 kV/3 kV
- primary current range 50 A ... 1250 A
- secondary currents 1 A or 5 A
- nominal burden 2.5 VA up to 30 VA
- accuracy classes 0.2 / 0.5 / 0.5s / 1 / 5P / 10P
- thermal nominal continuous current $1.2 \times I_N$
- it is possible to integrate into one housing a combination of measuring transformers and protection transformers
- measuring systems with hardened Polyurethan resin
- reliable results under extreme mechanical and climatic conditions
- a choice of 4 types of housings with different depths to accommodate special demands
- reduction of external wiring by means of fixed flexible connection terminals

Application

Current transformers of the type ASG 106 have been designed to cater for panel boards. Solidly installed flexible terminal connections as well as a large primary conductor opening with a 106 mm diameter, ensure a time saving and an easy assembly. The modular arrangement of the transformer make it possible to use a multiple of different types of current transformers in one housing.

Technical data ASG 106

Type	Low voltage current transformer, single-phase Measuring system with Polyurethan resin, UL94-VO, hardened		Short time excess current	1.5 x I_N / 60 min 2.0 x I_N / 30 min
Housing material	ABS / UL94-VO		Thermal nominal short time current	$I_{TH} = 25 \text{ kA} / 3 \text{ sek.}$ (other values upon request)
Max. operating voltage U_m	0.72 kV		Nominal dynamic short time current	$I_{DYN} = 60 \times I_N, 1 \text{ sec; max. } 100 \text{ kA}$
Isolation test voltage	3 kV $U_{EFF.}$; 50 Hz; 1 min.		Temperature environmental range	-5 °C < ϑ < +60 °C
Rated-held-short time alternating voltage (coil test)	3 kV		Max. permissible excess temperature of the primary current	70 °C
Nominal rated frequency	50 Hz, other frequencies upon request		Isolation class	"E"
Secondary connection cable	flexible copper wire, 4.0 mm ² , HO7V-K1X4, length 3.6 m		Climatic condition	suitable for tropical climates
Primary rated current intensity	50 ... 1250 A		Constant technical standards	DIN EN 60044/1 (issue 12/2003) DIN VDE 0414/1
Secondary rated current intensity	5 A or 1 A		Dimensions: b x h x d	190 x 190 x (50,100,170,214*) mm
Secondary rated assumed data burden	2.5 ... 15 VA	2.5 ... 30 VA	Primary conductor guide	diameter 106 mm
Accuracy classes	0.2 0.5 1		* Depth dependent on the number and type of the chosen measuring system	
	10P10 ... 30	5P10 ... 30		
Overload current limiting factor	FS 5 or FS 10			
Thermal continuous rated current intensity	$I_D = 1.2 \times I_N$, other values upon request			




Low voltage current transformers for industrial applications

Plug-in current transformers

ASK 205.3


Primary conductor
Round conductor
Transformer width



20 x 5 mm
Ø 17.5 mm
49.5 mm

ASK 21.3


Primary conductor
Round conductor
Transformer width



20 x 10 mm
Ø 19.2 mm
61 mm

ASK 231.5


Primary conductor
Round conductor
Transformer width



30 x 10 mm
Ø 28 mm
50 mm

ASK 31.3 ASK 31.3 2U


Primary conductor
Round conductor
Transformer width



30 x 10 mm
2 x 20 x 10 mm
Ø 26 mm
61 mm

ASK 318.3


Primary conductor
Round conductor
Transformer width



31 x 18 mm
Ø 26 mm
61 mm

ASK 31.4 ASK 31.4 2U ASK 31.4 3U


Primary conductor
Round conductor
Transformer width



30 x 10 mm
2 x 20 x 10 mm
Ø 28 mm
61 mm

ASK 31.5 ASK 31.5 2U


Primary conductor
Round conductor
Transformer width



30 x 10 mm
2 x 20 x 10 mm
Ø 28 mm
61 mm

ASK 31.6

Primary conductor
Round conductor
Transformer width



30 x 10 mm
20 x 13 mm
Ø 23 mm
95 mm

(E)AS 176.3




Plug-in current transformer

AS 176.3 – industrial application

Secondary current		5A			1A		
Primary current	Burden	Accuracy class			Accuracy class		
		3	1	0.5	3	1	0.5
A	VA	Art.-no.	Art.-no.	Art.-no.	Art.-no.	Art.-no.	Art.-no.
75	1,5	1030007001			1030207001		
100	2		1030006001			1030206001	
125	2		1030006002			1030206002	
150	1,5			1030005001			1030205001
150	2,5		1030006003			1030206003	
160	2,5		1030006004			1030206004	
200	2,5		1030006005	1030005002		1030206005	1030205002
250	2,5			1030005003			1030205003
250	3,75		1030006006			1030206006	

EAS 176.3 – tariff application

150	1,5		1030505001			1030705001
200	2,5		1030505002			1030705002
250	3,75		1030505003			1030705003

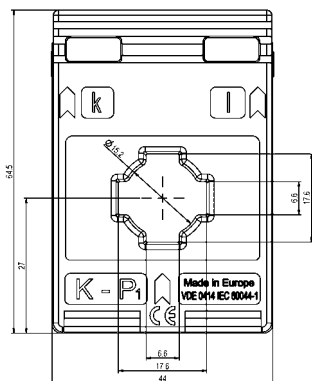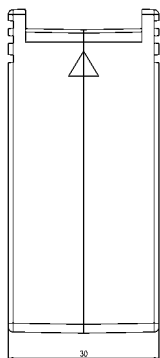



(E)ASK 176.3




Plug-in current transformer

ASK 176.3 – industrial application

Secondary current		5A			1A		
Primary current A	Burden VA	Accuracy class			Accuracy class		
		3	1	0.5	3	1	0.5
		Art.-no.	Art.-no.	Art.-no.	Art.-no.	Art.-no.	Art.-no.
75	1,5	1020007001			1020207001		
100	2		1020006001			1020206001	
125	2		1020006002			1020206002	
150	1,5			1020005001			1020205001
150	2,5		1020006003			1020206003	
160	2,5		1020006004			1020206004	
200	2,5		1020006005	1020005002		1020206005	1020205002
250	2,5			1020005003			1020205003
250	3,75		1020006006			1020206006	




EASK 176.3 – tariff application

150	1,5			1020505001			1020705001
200	2,5			1020505002			1020705002
250	3,75			1030505003			1020705003

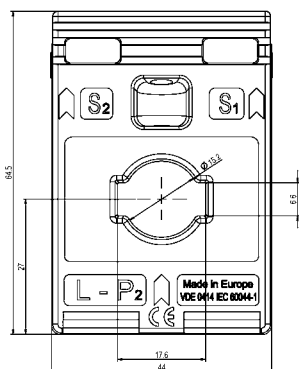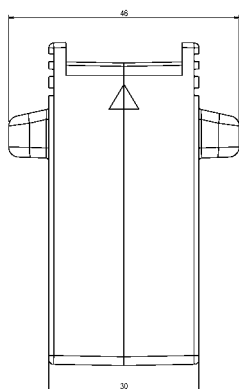

ASK 231.5

Plug-in current transformer




Secondary current		5A		1A	
Primary current	Burden	Accuracy class		Accuracy class	
		1	0,5	1	0,5
A	VA	Art.-no.	Art.-no.	Art.-no.	Art.-no.
50	1	92050		92250	
	1,25	92051		92251	
60	1	92052		92252	
	1,25	92053		92253	
75	1,25	92054		92254	
80	1,25	92056		92256	
100	1,5	92059		92259	
125	1,5	92062		92262	92220
150	1.5	92065		92265	92223
	2.5	92066		92266	
200	2.5	92068	92026	92268	92226
	5	92069		92269	
250	2.5	92071	92028	92271	92228
	5	92072		92029	
300	2.5	92074	92030	92274	92230
	5	92075		92275	
400	2.5	92077	92032	92277	92232
	5	92078		92033	
500	2.5	92081	92035	92281	92235
	5	92082	92036	92282	92236
	10	92083		92283	
600	2.5	92085	92038 92039		
	5	92086			
	10	92087			

Primary conductor	30 x 10 mm
Round conductor	Ø 28.0 mm
Transformer width	50 mm
Snap-on mounting	—
Sealed shutter	—



ASK 31.3

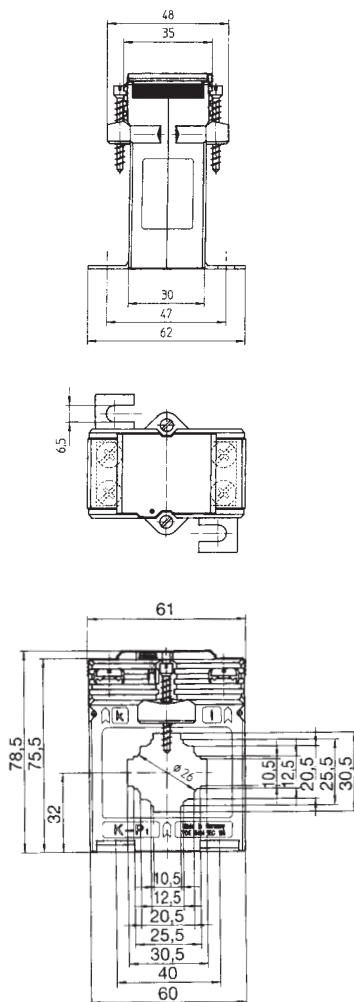Plug-in current transformer



Secondary current		5A			1A	
Primary current A	Burden VA	Accuracy class			Accuracy class	
		1	0,5	0,2s	1	0,5
		Art.-no.	Art.-no.	Art.-no.	Art.-no.	Art.-no.
50	1	7038			7238	
60	1	7039			7239	
75	1	7040			7240	
	1.5	7041			7241	
80	1.5	7042			7242	
	2.5	7043			7243	
100	1.5	7044	7011		7244	7211
	2.5	7045	7012		7245	7212
150	1.5	7046	7013	V11-1604C	7246	7213
	2.5	7047	7014		7247	7214
200	1.5	7048	7015		7248	7215
	2.5	7049	7016	V11-1704D	7249	7216
	5	7050	7017		7250	7217
250	1.5	7051	7018		7251	7218
	2.5	7052	7019	V11-1804D	7252	7219
	5	7053	7020	V11-1804F	7253	7220
	10	7054			7254	
300	1.5	7055	7021		7255	7221
	2.5	7056	7022	V11-1904D	7256	7222
	5	7057	7023	V11-1904F	7257	7223
	10	7058			7258	7224
400	1.5	7059			7259	
	2.5	7060	7025	V11-2004D	7260	7225
	5	7061	7026	V11-2004F	7261	7226
	10	7062	7027		7262	7227
500	2.5	7063	7028	V11-2104D	7263	7228
	5	7064	7029	V11-2104F	7264	7229
	10	7065	7030		7265	7230
600	2.5	7066	7031	V11-2204D	7266	7231
	5	7067	7032	V11-2204F	7267	7232
	10	7068	7033		7268	7233
	15	7069	7034		7269	7234
750	2.5	7070	7035	V11-2304D	7270	7235
	5	7071	7036	V11-2304F	7271	7236
	10	7072	7037		7272	7237

ASK 31.3 2U




Primary conductor	30 x 10 mm 2 x 20 x 10 mm
Round conductor	Ø 26 mm
Transformer width	61 mm
Snap-on mounting	Art.-no. 53011 see page 204
Sealed shutter	Art.-no. 59040 see page 205
Current transformer for tariff applications	see page 169

Secondary current		5A	1A
Primary current A	Burden VA	Accuracy class 1	Accuracy class 1
		Art.-no.	Art.-no.
200-100	5-2.5	7111	7311
300-150	5-2.5	7112	7312
400-200	5-2.5	7113	7313
	10-5	7114	7314
500-250	5-2.5	7115	7315
	10-5	7116	7316
600-300	10-5	7117	7317
	15-7.5	7118	7318




ASK 318.3

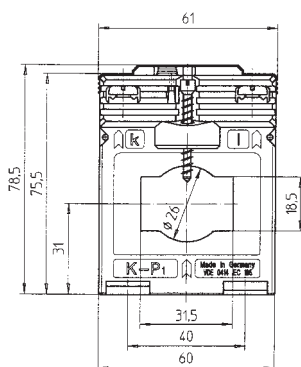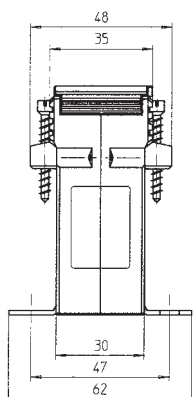Plug-in current transformer



Secondary current		5A		1A	
Primary current A	Burden VA	Accuracy class		Accuracy class	
		1	0.5	1	0.5
		Art.-no.	Art.-no.	Art.-no.	Art.-no.
60	1	29042		29242	
75	1	29043		29243	
	1.5	29044		29244	
80	1.5	29045		29245	
	2.5	29046		29246	
100	1.5	29047	29011	29247	29211
	2.5	29048	29012	29248	29212
150	1.5	29049	29013	29249	29213
	2.5	29050	29014	29250	29214
200	2.5	29052	29016	29252	29216
	5	29053	29017	29253	29217
250	2.5	29055	29019	29255	29219
	5	29056	29020	29256	29220
	10	29057		29257	
300	2.5	29059	29023	29259	29223
	5	29060	29024	29260	29224
	10	29061		29261	
400	2.5	29063	29027	29263	29227
	5	29064	29028	29264	29228
	10	29065	29029	29265	29229
500	2.5	29066	29030	29266	29230
	5	29067	29031	29267	29231
	10	29068	29032	29268	29232
600	2.5	29069	29033	29269	29233
	5	29070	29034	29270	29234
	10	29071	29035	29271	29235
	15	29072	29036	29272	29236
750	2.5	29073	29037	29273	29237
	5	29074	29038	29274	29238
	10	29075	29039	29275	29239
	15	29076	29040	29276	29240






Snap-on mounting

Primary conductor	31 x 18 mm
Round conductor	Ø 26.0 mm
Transformer width	61 mm
Snap-on mounting	Art.-no. 53011 see page 204
Sealed shutter	Art.-no. 59040 see page 205



ASK 31.4

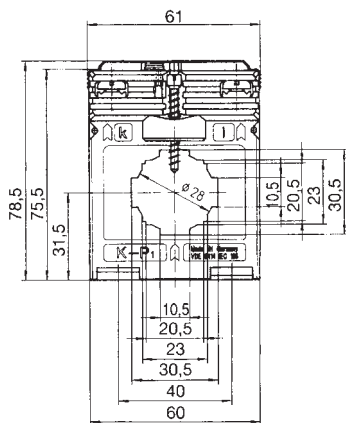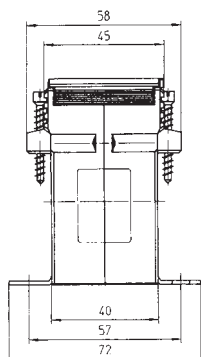Plug-in current transformer



Primary conductor	30 x 10 mm 2 x 20 x 10 mm
Round conductor	Ø 28 mm
Transformer width	61 mm
Snap-on mounting	Art.-no. 54011 see page 204
Sealed shutter	Art.-no. 59041 see page 205
Current transformer for tariff applications	see page 170


Secondary current		5A			1A	
Primary current A	Burden VA	Accuracy class			Accuracy class	
		1	0.5	0.2s	1	0.5
		Art.-no.	Art.-no.	Art.-no.	Art.-no.	Art.-no.
50	1.25	8157			8357	
	1.5	8038			8238	
60	1.25	8158			8358	
	1.5	8039			8239	
75	1.5	8041			8241	
	2.5	8042			8242	
80	1.5	8043			8243	
	2.5	8044			8244	
100	1.5	8045	8011		8245	8211
	2.5	8046	8010		8246	8210
	3.75	8152			8276	
	5	8047			8247	
150	1.5	8048	8012	V14-1604C	8248	8212
	2.5	8049	8013	V14-1604D	8249	8213
	5	8050	8410		8250	
	7.5	8051			8251	
200	2.5	8052	8014	V14-1704D	8252	8214
	5	8053	8015	V14-1704F	8253	8215
	10	8054			8254	
250	2.5	8055	8016	V14-1804D	8255	8216
	5	8056	8017	V14-1804F	8256	8217
	10	8057			8257	
	15	8058			8258	
300	2.5	8059	8018	V14-1904D	8259	8218
	5	8060	8019	V14-1904F	8260	8219
	10	8061	8020		8261	8220
	15	8062			8262	
400	2.5	8063	8021	V14-2004D	8263	8221
	5	8064	8022	V14-2004F	8264	8222
	10	8065	8023		8265	8223
	15	8066			8266	8224
500	2.5	8067	8025	V14-2104D	8267	8225
	5	8068	8026	V14-2104F	8268	8226
	10	8069	8027		8269	8227
	15	8070			8270	8228
600	2.5	8071	8029	V14-2204D	8271	8229
	5	8072	8030	V14-2204F	8272	8230
	10	8073	8031	V14-2204H	8273	8231
	15	8074	8032		8274	8232
750	2.5	8153	8033	V14-2304D	8353	8233
	5	8154	8034	V14-2304F	8354	8234
	10	8155	8035	V14-2304H	8355	8235
	15	8156	8036		8356	8236

Change-over transformers see page 48.





ASK 31.4 2U

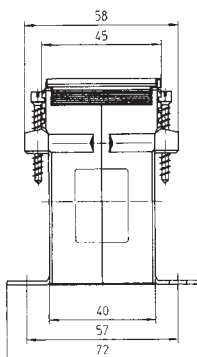Plug-in current transformer




Secondary current		5A	1A
Primary current A	Burden VA	Accuracy class	Accuracy class
		1	1
		Art.-no.	Art.-no.
200-100	5-2.5	8117	8317
	10-5	8119	8319
300-150	5-2.5	8118	8318
	10-5	8121	8321
400-200	5-2.5	8120	8320
	10-5	8122	8322
500-250	5-2.5	8123	8323
	10-5	8124	8324
600-300	5-2.5	8125	8325
	15-7.5	8126	8326

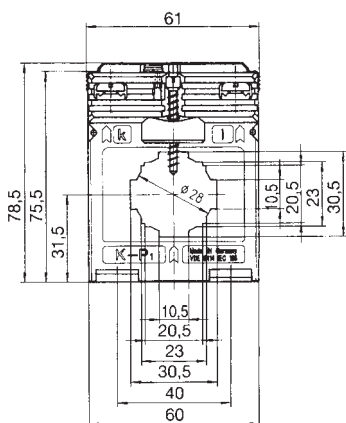ASK 31.4 3U



Secondary current		5A	1A
Primary current A	Burden VA	Accuracy class	Accuracy class
		1	1
		Art.-no.	Art.-no.
300-200-100	10-5-2.5	8137	8337
400-200-100	10-5-2.5	8138	8338
600-300-150	10-5-2.5	8139	8339
	15-10-5	8140	8340
600-400-200	10-5-2.5	8141	8341
	15-10-5	8142	8342






Snap-on mounting

Primary conductor	30 x 10 mm 2 x 20 x 10 mm
Round conductor	Ø 28 mm
Transformer width	61 mm
Snap-on mounting	Art.-no. 54011 see page 204
Sealed shutter	Art.-no. 59041 see page 205
Current transformer for tariff applications	see page 170



ASK 31.5

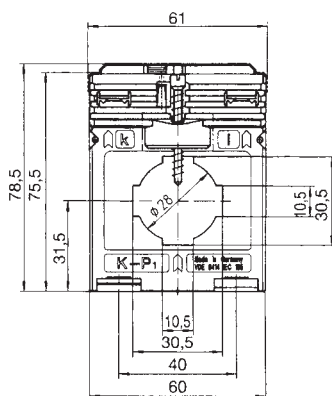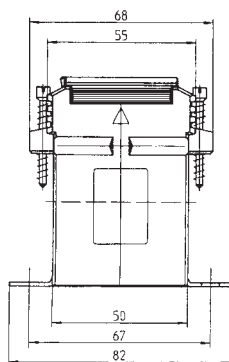Plug-in current transformer



Primary conductor	30 x 10 mm 2 x 20 x 10 mm
Round conductor	Ø 28 mm
Transformer width	61 mm
Snap-on mounting	Art.-no. 55011 see page 204
Sealed shutter	Art.-no. 59041 see page 205
Protection plug-in current transformer	see page 127
Current transformer for tariff applications	see page 171




Secondary current		5A		1A	
Primary current A	Burden VA	Accuracy class		Accuracy class	
		1	0.5	1	0.5
		Art.-no.	Art.-no.	Art.-no.	Art.-no.
40	1	9043		9243	
50	1.5	9045		9245	
	2.5	9046		9246	
60	1.5	9047		9247	
	2.5	9048		9248	
75	1.5	9049	9011	9249	9211
	2.5	9050	9012	9250	9212
80	1.5	9051	9013	9251	9213
	2.5	9052	9014	9252	9214
	5	9053		9253	
100	1.5	9054	9015	9254	9215
	2.5	9055	9016	9255	9216
	5	9056	9017	9256	9217
150	2.5	9057	9018	9257	9218
	5	9058	9019	9258	9219
	7.5	9059		9259	
200	2.5	9060	9020	9260	9220
	5	9061	9021	9261	9221
	10	9062	9022	9262	9222
	15	9063		9263	
250	5	9064	9023	9264	9223
	10	9065	9024	9265	9224
	15	9066	9025	9266	9225
300	5	9067	9026	9267	9226
	10	9068	9027	9268	9227
	15	9069	9028	9269	9228
400	5	9070	9029	9270	9229
	10	9071	9030	9271	9230
	15	9072	9031	9272	9231
	30	9073		9273	
500	5	9074	9032	9274	9232
	10	9075	9033	9275	9233
	15	9076	9034	9276	9234
	30	9077		9277	
600	5	9078	9035	9278	9235
	10	9079	9036	9279	9236
	15	9080	9037	9280	9237
	30	9081		9281	
750	5	9082	9038	9282	9238
	10	9083	9039	9283	9239
	15	9084	9040	9284	9240
	30	9085		9285	

Change-over transformers see page 50.




ASK 31.5 2U

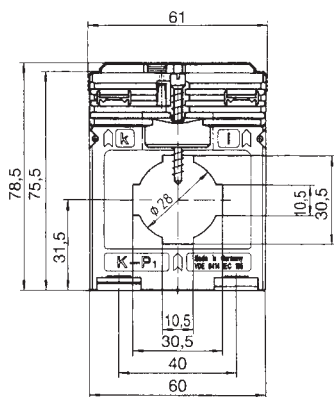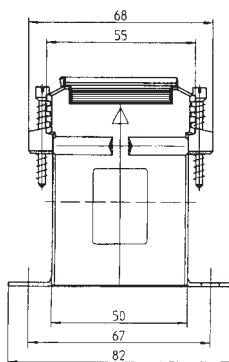Plug-in current transformer



Secondary current		5A	1A
Primary current A	Burden VA	Accuracy class	Accuracy class
		1	1
		Art.-no.	Art.-no.
150-75	5-2.5	9132	9332
	10-5	9133	9333
200-100	5-2.5	9134	9334
	10-5	9135	9335
	15-7.5	9136	9336
300-150	5-2.5	9137	9337
	10-5	9138	9338
	15-7.5	9139	9339
400-200	5-2.5	9140	9340
	10-5	9141	9341
	15-7.5	9142	9342
500-250	5-2.5	9143	9343
	10-5	9144	9344
	15-7.5	9145	9345
600-300	5-2.5	9146	9346
	10-5		





Snap-on mounting

Primary conductor	30 x 10 mm 2 x 20 x 10 mm
Round conductor	Ø 28 mm
Transformer width	61 mm
Snap-on mounting	Art.-no. 55011 see page 204
Sealed shutter	Art.-no. 59041 see page 205
Protection plug-in current transformer	see page 127
Current transformer for tariff applications	see page 171



ASK 31.6

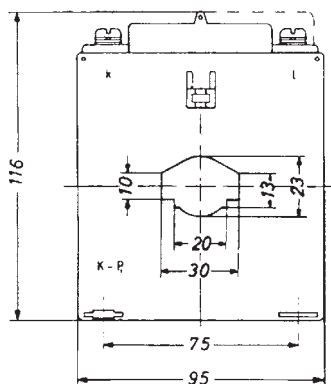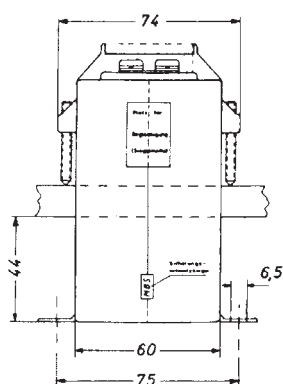Plug-in current transformer



Primary conductor	30 x 10 mm 20 x 13 mm
Round conductor	Ø 23 mm
Transformer width	95 mm
Snap-on mounting	—
Sealed shutter	Art.-no. 59044 see page 205
Protection plug-in current transformer	see page 128
Current transformer for tariff applications	see page 172

Secondary current		5A		1A	
Primary current A	Burden VA	Accuracy class		Accuracy class	
		1	0.5	1	0.5
		Art.-no.	Art.-no.	Art.-no.	Art.-no.
30	1.5	10054		10254	
	40	10056		10256	
	2.5	10057		10257	
50	1.5		10011		10211
	2.5	10058	10012	10258	10212
60	1.5		10013		10213
	2.5	10059	10014	10259	10214
	5	10060		10260	
75	2.5	10061	10015	10261	10215
	5	10062	10016	10262	10216
80	2.5	10063	10017	10263	10217
	5	10064	10018	10264	10218
	10	10065		10265	
100	2.5	10066	10019	10266	10219
	5	10067	10020	10267	10220
	10	10068	10021	10268	10221
	15	10069		10269	
150	2.5		10022		10222
	5	10070	10023	10270	10223
	10	10071	10024	10271	10224
	15	10072	10025	10272	10225
200	2.5		10026		10226
	5	10073	10027	10273	10227
	10	10074	10028	10274	10228
	15	10075	10029	10275	10229
250	5	10076	10030	10276	10230
	10	10077	10031	10277	10231
	15	10078	10032	10278	10232
300	5	10079	10034	10279	10234
	10	10080	10035	10280	10235
	15	10081	10036	10281	10236
400	5	10082	10038	10282	10238
	10	10083	10039	10283	10239
	15	10084	10040	10284	10240
500	5	10085	10042	10285	10242
	10	10086	10043	10286	10243
	15	10087	10044	10287	10244
600	5	10088	10046	10288	10246
	10	10089	10047	10289	10247
	15	10090	10048	10290	10248
750	5	10091	10050	10291	10250
	10	10092	10051	10292	10251
	15	10093	10052	10293	10252




Plug-in current transformers

ASK 41.3

Primary conductor

Round conductor
Transformer width




40 x 12 mm
32 x 18 mm
Ø 26 mm
61 mm

ASK 421.4

Primary conductor

Round conductor
Transformer width



20 x 10 mm
Ø 20 mm
71 mm


ASK 41.4

Primary conductor

ASK 41.4 2U

Round conductor
Transformer width

ASK 41.4 3U




40 x 10 mm
2 x 30 x 5 mm
Ø 32 mm
71 mm

ASK 41.5

Primary conductor

Round conductor
Transformer width



40 x 10 mm
Ø 32 mm
71 mm


ASK 412.4

Primary conductor

ASK 412.4 2U

Round conductor
Transformer width

ASK 412.4 3U




40 x 12 mm
30 x 15 mm
Ø 30.5 mm
71 mm

ASK 41.6

Primary conductor

Round conductor
Transformer width






40 x 12 mm
30 x 15 mm
Ø 32 mm
95 mm




ASK 41.3

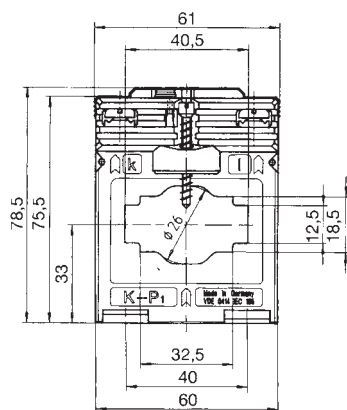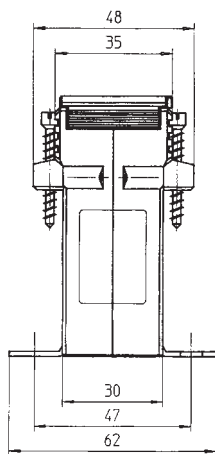Plug-in current transformer



Secondary current		5A	1A
Primary current A	Burden VA	Accuracy class	Accuracy class
		1	1
		Art.-no.	Art.-no.
100	1	11037	11237
	1.5	11038	11238
150	1.5	11039	11239
	2.5	11040	11240
200	1.5	11041	11241
	2.5	11042	11242
250	1.5	11043	11243
	2.5	11044	11244
	5	11045	11245
300	1.5	11046	11246
	2.5	11047	11247
	5	11048	11248
400	1.5	11049	
	2.5	11050	
	5	11051	
500	1.5	11052	
	2.5	11053	
	5	11054	
	10	11055	
600	1.5	11056	
	2.5	11057	
	5	11058	
	10	11059	
750	2.5	11060	
	5	11061	
	10	11062	
	15	11063	
800	2.5	11064	
	5	11065	
	10	11066	
	15	11067	






Snap-on mounting

Primary conductor	40 x 12 mm 32 x 18 mm
Round conductor	Ø 26.0 mm
Transformer width	61 mm
Snap-on mounting	Art.-no. 53011 see page 204
Sealed shutter	Art.-no. 59040 see page 205



ASK 421.4

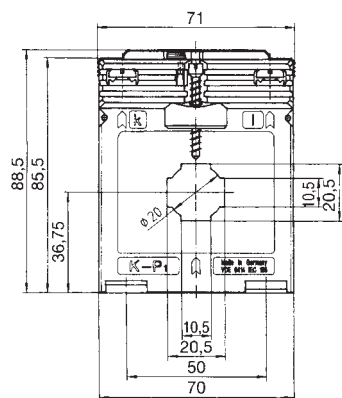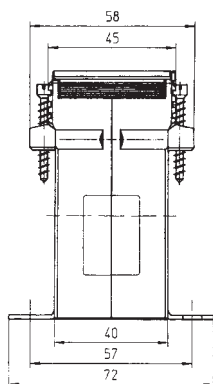Plug-in current transformer






Secondary current		5A		1A	
Primary current A	Burden VA	Accuracy class		Accuracy class	
		1	0.5	1	0.5
		Art.-no.	Art.-no.	Art.-no.	Art.-no.
30	1	12033		12233	
40	1.5	12034		12234	
50	1.5	12035	12011	12235	12211
	2.5	12036		12236	
60	1.5	12037	12012	12237	12212
	2.5	12038		12238	
	3.75			12239	
	5	12039			
75	2.5	12040	12013	12240	12213
	5	12041		12241	
80	2.5	12042	12014	12242	12214
	5	12043		12243	
100	2.5	12044	12015	12244	12215
	5	12045	12016	12245	12216
	10	12046		12246	
125	2.5	12047	12017	12247	12217
	5	12048	12018	12248	12218
	10	12049		12249	
150	2.5		12019		12219
	5	12050	12020	12250	12220
	10	12051		12251	
200	2.5		12021		12221
	5	12053	12022	12253	12222
	10	12054		12254	
	15	12055		12255	
250	5	12056	12023	12256	12223
	10	12057	12024	12257	12224
	15	12058		12258	
300	5	12059	12025	12259	12225
	10	12060	12026	12260	12226
	15	12061		12261	
400	5		12027		12227
	10	12062	12028	12262	12228
	15	12063	12029	12263	12229
	30	12064		12264	
500	5		12030		12230
	10	12065	12031	12265	12231
	15	12066	12032	12266	12232
	30	12067		12267	

Primary conductor	20 x 10 mm
Round conductor	Ø 20 mm
Transformer width	71 mm
Snap-on mounting	—
Sealed shutter	Art.-no. 59041 see page 205
Protection plug-in current transformers	see page 132



ASK 41.4

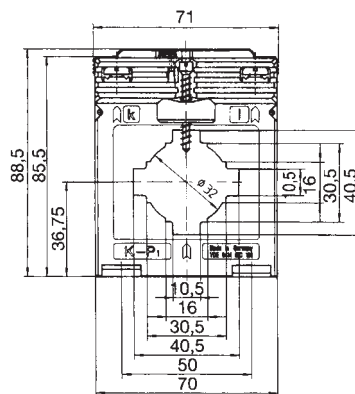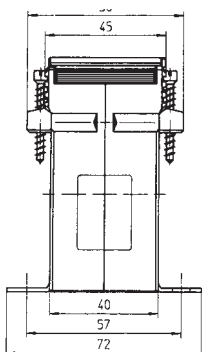Plug-in current transformer






Primary conductor	40 x 10 mm 2 x 30 x 5 mm
Round conductor	Ø 32 mm
Transformer width	71 mm
Snap-on mounting	Art.-no. 55012 see page 204
Sealed shutter	Art.-no. 59041 see page 205
Protection plug-in current transformer	see page 133
Current transformer for tariff applications	see page 174

Secondary current		5A			1A	
Primary current A	Burden VA	Accuracy class			Accuracy class	
		1	0.5	0.2s	1	0.5
		Art.-no.	Art.-no.	Art.-no.	Art.-no.	Art.-no.
50	1.25	13180			13380	
	1.5	13036			13236	
60	1.25	13181			13238	
	1.5	13037			13237	
75	1.5	13039			13239	
	2.5	13040			13240	
80	1.5	13041			13241	
	2.5	13042			13242	
100	1.5	13043	13011		13243	13211
	2.5	13044	13083		13244	13283
	3.75	13179			13245	
150	1.5	13046	13012	V24-1604C	13246	13212
	2.5	13047	13013	V24-1604D	13247	13213
	5	13048	13084		13248	13284
200	1.5		13014	V24-1704C		13214
	2.5	13049	13015	V24-1704D	13249	13215
	5	13050	13085	V24-1704F	13250	13285
	10	13051			13251	
250	1.5		13016			13216
	2.5	13052	13017	V24-1804D	13252	13217
	5	13053	13086	V24-1804F	13253	13286
	10	13054			13254	
300	2.5	13055	13018	V24-1904D	13255	13218
	5	13056	13019	V24-1904F	13256	13219
	10	13057	13087		13257	13287
	15	13058			13258	
400	2.5	13059	13020	V24-2004D	13259	13220
	5	13060	13021	V24-2004F	13260	13221
	10	13061	13088	V24-2004H	13261	13288
	15	13062			13262	
500	2.5	13063	13022	V24-2104D	13263	13222
	5	13064	13023	V24-2104F	13264	13223
	10	13065	13024	V24-2104H	13265	13224
	15	13066	13089		13266	13289
600	2.5	13067	13025	V24-2204D	13267	13225
	5	13068	13026	V24-2204F	13268	13226
	10	13069	13027		13269	13227
	15	13070	13090		13270	13290
750	2.5			V24-2304D		
	5	13071	13028	V24-2304F	13271	13228
	10	13072	13029	V24-2304H	13272	13229
	15	13073	13091		13273	13291
800	5	13075	13030		13275	13230
	10	13076	13031		13276	13231
	15	13077			13277	
	30	13078			13278	
1000	5	13079	13032		13279	13232
	10	13080	13033		13280	13233
	15	13081	13034		13281	13234
	30	13082			13282	



ASK 41.4 2U

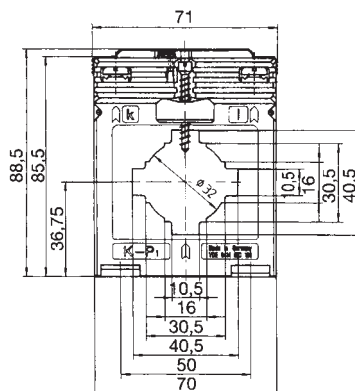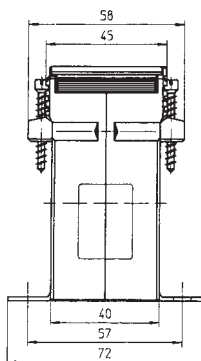
Plug-in current transformer



Secondary current		5A	1A
Primary current A	Burden VA	Accuracy class	Accuracy class
		1	1
		Art.-no.	Art.-no.
200-100	5-2.5	13133	13333
	10-5	13135	13335
300-150	5-2.5	13134	13334
	10-5	13136	13336
400-200	5-2.5	13137	13337
	10-5	13138	13338
500-250	5-2.5	13139	13339
	10-5	13140	13340
600-300	5-2.5	13141	13341
	10-5	13142	13342
800-400	5	13143	13343
	5-2.5	13144	13344
1000-500	5-2.5	13145	13345
	10-5	13146	13346
	15-7.5	13147	13347

ASK 41.4 3U

Secondary current		5A	1A
Primary current A	Burden VA	Accuracy class	Accuracy class
		1	1
		Art.-no.	Art.-no.
400-200-100	10-5-2.5	13163	13363
600-300-150	10-5-2.5	13164	13364
800-400-200	10-5-2.5	13165	13365
1000-500-250	10-5-2.5	13166	13366
	15-7.5-2.5	13167	13367






Snap-on mounting

Primary conductor	40 x 10 mm 2 x 30 x 5 mm
Round conductor	Ø 32 mm
Transformer width	71 mm
Snap-on mounting	Art.-no. 55012 see page 204
Sealed shutter	Art.-no. 59041 see page 205
Protection plug-in current transformer	see page 133
Current transformer for tariff applications	see page 174



ASK 41.5

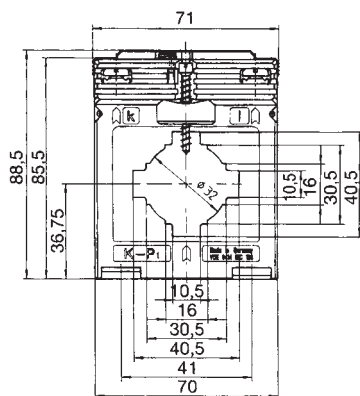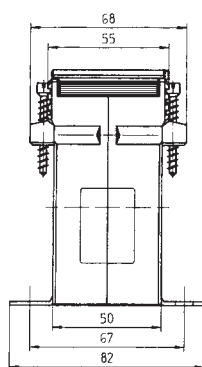Plug-in current transformer






Primary conductor	40 x 10 mm 2 x 30 x 5 mm
Round conductor	Ø 32 mm
Transformer width	71 mm
Snap-on mounting	Art.-no. 55011 see page 204
Sealed shutter	Art.-no. 59041 see page 205
Current transformer for tariff applications	see page 175

Secondary current		5A		1A	
Primary current A	Burden VA	Accuracy class		Accuracy class	
		1	0.5	1	0.5
		Art.-no.	Art.-no.	Art.-no.	Art.-no.
50	1,5	1010006001		1010206001	
60	1,5	1010006002		1010206002	
	2,5	1010006003		1010206003	
75	1,5	1010006004	1010005001	1010206004	1010205001
	2,5	1010006005	1010005002	1010206005	1010205002
80	1,5	1010006006	1010005003	1010206006	1010205003
	2,5	1010006007	1010005004	1010206007	1010205004
100	1,5	1010006008	1010005005	1010206008	1010205005
	2,5	1010006009	1010005006	1010206009	1010205006
	3,75			1010206010	
150	2,5	1010006010	1010005007	1010206011	1010205007
	5	1010006011	1010005008	1010206012	1010205008
	7,5	1010006012	1010005009	1010206013	1010205009
200	2,5	1010006013	1010005010	1010206014	1010205010
	5	1010006014	1010005011	1010206015	1010205011
	10			1010206016	1010205012
250	2,5	1010006015	1010005012	1010206017	1010205013
	5	1010006016	1010005013	1010206018	1010205014
	10	1010006017	1010005014	1010206019	1010205015
	15			1010206020	1010205016
300	2,5	1010006018	1010005015	1010206021	1010205017
	5	1010006019	1010005016	1010206022	1010205018
	10	1010006020	1010005017	1010206023	1010205019
	15	1010006021	1010005018	1010206024	1010205020
400	2,5	1010006022	1010005019	1010206025	1010205021
	5	1010006023	1010005020	1010206026	1010205022
	10	1010006024	1010005021	1010206027	1010205023
	15	1010006025	1010005022	1010206028	1010205024
500	2,5	1010006026	1010005023	1010206029	1010205025
	5	1010006027	1010005024	1010206030	1010205026
	10	1010006028	1010005025	1010206031	1010205027
	15	1010006029	1010005026	1010206032	1010205028
600	2,5	1010006030	1010005027	1010206033	1010205029
	5	1010006031	1010005028	1010206034	1010205030
	10	1010006032	1010005029	1010206035	1010205031
	15	1010006033	1010005030	1010206036	1010205032
750	2,5	1010006034	1010005031	1010206037	1010205033
	5	1010006035	1010005032	1010206038	1010205034
	10	1010006036	1010005033	1010206039	1010205035
	15	1010006037	1010005034	1010206040	1010205036
800	2,5	1010006038	1010005035	1010206041	1010205037
	5	1010006039	1010005036	1010206042	1010205038
	10	1010006040	1010005037	1010206043	1010205039
	15	1010006041	1010005038	1010206044	1010205040
1000	2,5	1010006042	1010005039	1010206045	1010205041
	5	1010006043	1010005040	1010206046	1010205042
	10	1010006044	1010005041	1010206047	1010205043
	15	1010006045	1010005042	1010206048	1010205044



ASK 412.4

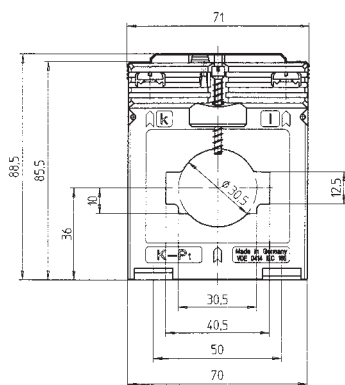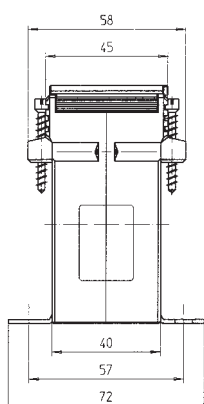Plug-in current transformer




Primary conductor	40 x 12 mm 30 x 15 mm
Round conductor	Ø 30.5 mm
Transformer width	71 mm
Snap-on mounting	Art.-no. 55012 see page 204
Sealed shutter	Art.-no. 59041 see page 205

Secondary current		5A		1A	
Primary current A	Burden VA	Accuracy class		Accuracy class	
		1	0.5	1	0.5
		Art.-no.	Art.-no.	Art.-no.	Art.-no.
50	1.25	28036		28236	
	1.5	28037		28237	
60	1.25	28038		28238	
	1.5	28039		28239	
75	1.5	28040		28240	
	2.5	28041		28241	
80	1.5	28042		28242	
	2.5	28043		28243	
100	1.5	28044	28011	28244	28211
	2.5	28045		28245	
	3.75	28046		28246	
150	1.5	28047	28012	28247	28212
	2.5	28048	28013	28248	28213
	5	28049		28249	
200	2.5	28051	28015	28251	28215
	5	28052		28252	
	10	28053		28253	
250	1.5	28054	28016	28254	28216
	2.5	28055	28017	28255	28217
	5	28056	28014	28256	28214
	10	28057		28257	28087
300	2.5	28058	28018	28258	28218
	5	28059	28019	28259	28219
	10	28060		28260	
	15	28061		28261	
400	2.5	28062	28020	28262	28220
	5	28063	28021	28263	28221
	10	28064	28009	28264	28209
	15	28065		28265	
500	2.5	28066	28022	28266	28222
	5	28067	28023	28267	28223
	10	28068	28024	28268	28224
	15	28069		28269	
600	2.5	28070	28025	28270	28225
	5	28071	28026	28271	28226
	10	28072	28027	28272	28227
	15	28073		28273	
750	5	28074	28028	28274	28228
	10	28075	28029	28275	28229
	15	28076	28010	28276	28210
	30	28077		28277	
800	5	28078	28030	28278	28230
	10	28079	28031	28279	28231
	15	28080	28035	28280	28235
	30	28081		28281	





ASK 412.4 2U

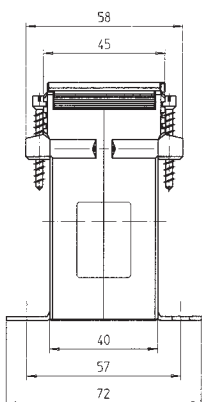Plug-in current transformer




Secondary current		5A	1A
Primary current A	Burden VA	Accuracy class	Accuracy class
		1	1
		Art.-no.	Art.-no.
200-100	5-2.5	28133	28333
	10-5	28135	28335
300-150	5-2.5	28134	28334
	10-5	28137	28337
400-200	5-2.5	28136	28336
	10-5	28139	28339
500-250	5-2.5	28138	28338
	10-5	28140	28340
600-300	5-2.5	28141	28341
	10-5	28143	28343
800-400	5-2.5	28144	28344
	10-5	28145	28345
	15-7.5		

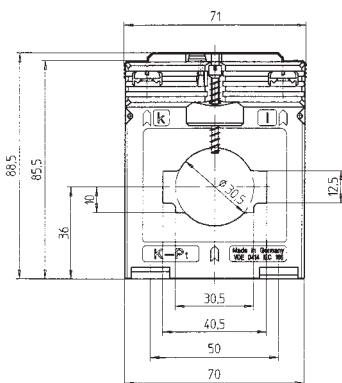ASK 412.4 3U



Secondary current		5A	1A
Primary current A	Burden VA	Accuracy class	Accuracy class
		1	1
		Art.-no.	Art.-no.
400-200-100	10-5-2.5	28163	
	15-7.5-2.5		28363
600-300-150	10-5-2.5	28164	28364
800-400-200	10-5-2.5	28165	28365





Snap-on mounting

Primary conductor	40 x 12 mm 30 x 15 mm
Round conductor	Ø 30.5 mm
Transformer width	71 mm
Snap-on mounting	Art.-no. 55012 see page 204
Sealed shutter	Art.-no. 59041 see page 205



ASK 41.6

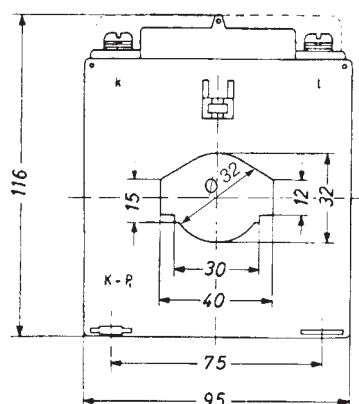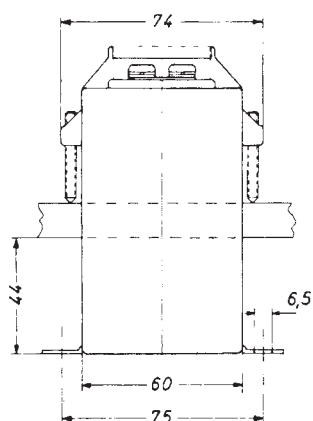Plug-in current transformer



Primary conductor	40 x 12 mm 30 x 15 mm
Round conductor	Ø 32 mm
Transformer width	95 mm
Snap-on mounting	—
Sealed shutter	Art.-no. 59044 see page 205
Protection plug-in current transformer	see page 134
Current transformer for tariff applications	see page 176


Secondary current		5A		1A	
Primary current A	Burden VA	Accuracy class		Accuracy class	
		1	0.5	1	0.5
		Art.-no.	Art.-no.	Art.-no.	Art.-no.
50	1.5	14060	14011	14260	14211
	2.5	14061		14261	
60	1.5	14062	14012	14262	14212
	2.5	14063		14263	
75	1.5	14064		14264	
	2.5	14065	14013	14265	14213
	5	14066	14014	14266	14214
80	2.5	14067	14015	14267	14215
	5	14068	14016	14268	14216
100	2.5	14069	14017	14269	14217
	5	14070	14018	14270	14218
	10	14071	14019	14271	14219
150	2.5		14020		14220
	5	14072	14021	14272	14221
	10	14073	14022	14273	14222
	15	14074	14023	14274	14223
200	2.5		14024		14224
	5	14075	14025	14275	14225
	10	14076	14026	14276	14226
	15	14077	14027	14277	14227
250	2.5				14228
	5	14078	14029	14278	14229
	10	14079	14030	14279	14230
	15	14080	14031	14280	14231
300	2.5		14032		14232
	5	14081	14033	14281	14233
	10	14082	14034	14282	14234
	15	14083	14035	14283	14235
400	2.5		14036		14236
	5	14084	14037	14284	14237
	10	14085	14038	14285	14238
	15	14086	14039	14286	14239
500	2.5		14040		14240
	5	14087	14041	14287	14241
	10	14088	14042	14288	14242
	15	14089	14043	14289	14243
600	5		14044		14244
	10	14090	14045	14290	14245
	15	14091	14046	14291	14246
	30	14092	14047	14292	14247
750	5		14048		14248
	10	14094	14049	14294	14249
	15	14095	14050	14295	14250
	30	14096	14051	14296	14251
800	10	14098	14053	14298	14253
	15	14099	14054	14299	14254
	30	14100	14055	14300	14255
1000	5		14056		14256
	10	14102	14057	14302	14257
	15	14103	14058	14303	14258
	30	14104	14059	14304	14259
	45	14105		14305	



Plug-in current transformers

ASK 541.4

Primary conductor


Round conductor
Transformer width

40 x 10 mm
2 x 30 x 5 mm
Ø 32 mm
86 mm

ASK 51.4

ASK 51.4 2U


ASK 51.4 3U

Primary conductor

Round conductor
Transformer width

50 x 12 mm
2 x 40 x 10 mm
Ø 44 mm
86 mm


ASK 51.6


Primary conductor

Round conductor
Transformer width

50 x 12 mm
40 x 30 mm
Ø 40 mm
95 mm

ASK 561.4


Primary conductor

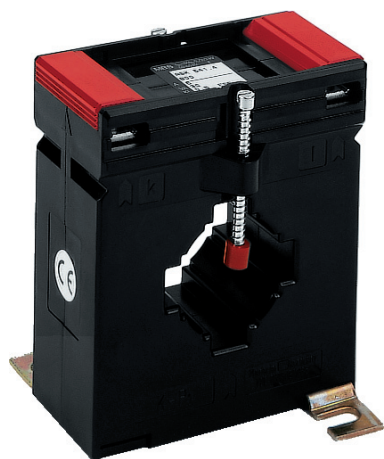Round conductor
Transformer width

60 x 10 mm
30 x 40 mm
2 x 50 x 10 mm
Ø 44 mm
86 mm



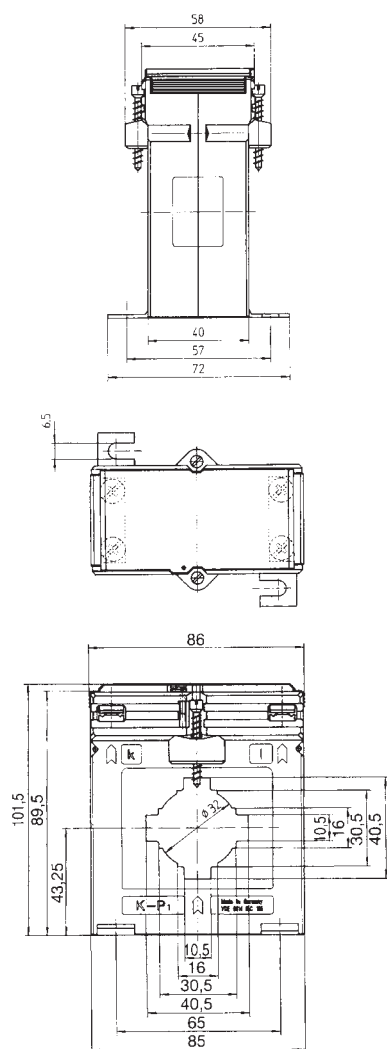
ASK 541.4

Plug-in current transformer






Primary conductor	40 x 10 mm 2 x 30 x 5 mm
Round conductor	Ø 32 mm
Transformer width	86 mm
Snap-on mounting	—
Sealed shutter	Art.-no. 59042 see page 205
Protection plug-in current transformer	see page 140
Current transformer for tariff applications	see page 177

Secondary current		5A			1A	
Primary current A	Burden VA	Accuracy class			Accuracy class	
		1	0.5	0.2s	1	0.5
		Art.-no.	Art.-no.	Art.-no.	Art.-no.	Art.-no.
30	1				15248	
	1.5	15048				
40	1.5	15049			15249	
	2.5	15050			15250	
50	1.5	15051			15251	
	2.5	15052			15252	
60	1.5	15053	15013		15253	15213
	2.5	15054			15254	
75	1.5	15055	15014		15255	15214
	2.5	15056	15100		15256	15300
80	1.5		15015			15215
	2.5	15057	15016		15257	15216
	5	15058			15258	
100	1.5			V33-1304C		
	2.5		15017	V33-1304D		15217
	5	15059	15018		15259	15218
	10	15060			15260	
125	2.5		15019			15219
	5	15061	15020		15261	15220
	10	15062			15262	
150	2.5	15063	15021	V33-1604D	15263	15221
	5	15064	15022	V33-1604F	15264	15222
	10	15065	15343		15265	
200	2.5		15023	V33-1704D		15223
	5	15066	15024	V33-1704F	15266	15224
	10	15067	15101		15267	15301
	15	15068	15102		15268	15302
250	2.5		15025	V33-1804D		15225
	5	15069	15026	V33-1804F	15269	15226
	10	15070	15103	V33-1804H	15270	15303
	15	15071	15104		15271	15304
300	2.5		15027	V33-1904D		15227
	5	15072	15028	V33-1904F	15272	15228
	10	15073	15029	V33-1904H	15273	15229
	15	15074	15105		15274	15305
400	2.5		15030	V33-2004D		15230
	5	15075	15031	V33-2004F	15275	15231
	10	15076	15032	V33-2004H	15276	15232
	15	15077			15277	15339
500	2.5			V33-2104D		
	5		15033	V33-2104F		15233
	10	15078	15034	V33-2104H	15278	15234
	15	15079	15035	V33-2104J	15279	15235
	30	15080	15344		15280	
600	2.5			V33-2204D		
	5		15036	V33-2204F		15236
	10	15081	15037	V33-2204H	15281	15237
	15	15082	15038	V33-2204J	15282	15238
	30	15083	15039		15283	15239
750	2.5			V33-2304D		
	5			V33-2304F		
	10	15084	15040	V33-2304H	15284	15240
	15	15085	15041	V33-2304J	15285	15241
	30	15086	15042		15286	15242
800	10	15087	15043		15287	15243
	15	15088	15044		15288	15244
	30	15089	15106		15289	15306
1000	2.5			V33-2504D		
	5		15045	V33-2504F		15245
	10	15090	15046	V33-2504H	15290	15246
	15	15091	15047	V33-2504J	15291	15247
	30	15092			15292	

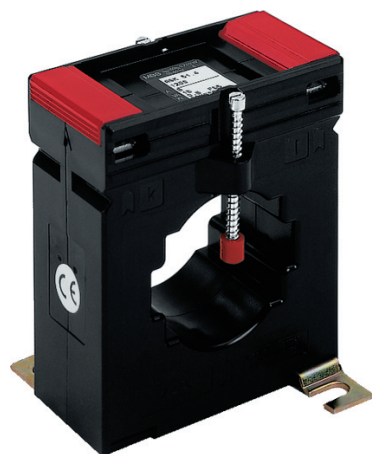

ASK 51.4


Plug-in current transformer



Primary conductor	50 x 12 mm 2 x 40 x 10 mm
Round conductor	Ø 44 mm
Transformer width	86 mm
Snap-on mounting	—
Sealed shutter	Art.-no. 59042 see page 205
Protection plug-in current transformer	see page 142
Current transformer for tariff applications	see page 178




Secondary current		5A			1A	
Primary current A	Burden VA	Accuracy class			Accuracy class	
		1	0.5	0.2s	1	0.5
		Art.-no.	Art.-no.	Art.-no.	Art.-no.	Art.-no.
100	1.5	16043	16170		16243	
	2.5	16086	16171			
150	1.5	16044	16011		16244	16211
	2.5	16045	16010		16245	16210
200	1.5		16012	V34-1704C		16212
	2.5	16046	16013	V34-1704D	16246	16213
	5	16047	16152	V34-1704F	16247	16352
250	1.5		16014			16214
	2.5	16048	16015	V34-1804D	16248	16215
	5	16049	16153	V34-1804F	16249	16353
	10	16177			16390	
300	2.5	16050	16017	V34-1904D	16250	16217
	5	16051	16018	V34-1904F	16251	16218
	10	16052			16252	
400	2.5	16053	16019	V34-2004D	16253	16219
	5	16054	16020	V34-2004F	16254	16220
	10	16055	16021	V34-2004H	16255	16221
	15	16056	16201		16256	
500	2.5	16057	16022	V34-2104D	16257	16222
	5	16058	16023	V34-2104F	16258	16223
	10	16059	16024	V34-2104H	16259	16224
	15	16060	16202		16260	
600	2.5	16061	16025	V34-2204D	16261	16225
	5	16062	16026	V34-2204F	16262	16226
	10	16063	16027	V34-2204H	16263	16227
	15	16064	16154		16264	16354
750	2.5	16065	16028	V34-2304D	16265	16228
	5	16066	16029	V34-2304F	16266	16229
	10	16067	16030	V34-2304H	16267	16230
	15	16068	16203		16268	
800	5	16069	16031	V34-2404F	16269	16231
	10	16070	16032	V34-2404H	16270	16232
	15	16071	16033		16271	16233
	30	16072			16272	
1000	2.5			V34-2504D		
	5	16073	16034	V34-2504F	16273	16234
	10	16074	16035	V34-2504H	16274	16235
	15	16075	16036	V34-2504J	16275	16236
1200	30	16076			16276	
	5	16077	16037		16277	16237
	10	16078	16038		16278	16238
	15	16079	16039		16279	16239
1250	30	16080			16280	
	5	16081	16040		16281	16240
	10	16082	16041		16282	16241
	15	16083	16042		16283	16242
	30	16084			16284	

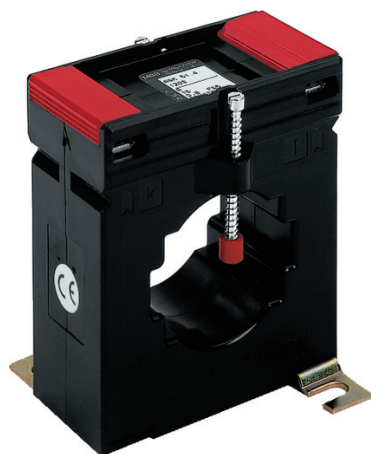Change-over transformers see page 66.



ASK 51.4 2U

Plug-in current transformer



Secondary current		5A	1A
Primary current A	Burden VA	Accuracy class	Accuracy class
		1	1
		Art.-no.	Art.-no.
400-200	5-2.5	16130	16330
	10-5	16131	16331
500-250	5-2.5	16132	16332
	10-5	16133	16333
600-300	5-2.5	16134	16334
	10-5	16135	16335
800-400	5-2.5	16136	16336
	10-5	16137	16337
	15-7.5	16138	16338
1000-500	5-2.5	16139	16339
	10-5	16140	16340
	15-7.5	16141	16341
1200-600	5-2.5	16142	16342
	10-5	16143	16343
	15-7.5	16144	16344
	30-15	16145	16345

ASK 51.4 3U



Secondary current		5A	1A
Primary current A	Burden VA	Accuracy class	Accuracy class
		1	1
		Art.-no.	Art.-no.
800-400-200	10-5-2.5	16162	16362
1000-500-250	10-5-2.5	16163	16363
	15-7.5-2.5	16164	16364
1200-600-300	10-5-2.5	16165	16365
	15-7.5-2.5	16166	16366
1200-1000-300	7.5-5-2.5	16174	16374
1000-600-400	10-5-2.5	16175	16375
1000-600-300	15-10-5	16176	16376
600-400-200	15-7.5-5	16178	16378
1000-800-600	15-10-5	16179	16379
1000-600-300	10-5-2.5	16180	16380

Primary conductor	50 x 12 mm 2 x 40 x 10 mm
Round conductor	Ø 44 mm
Transformer width	86 mm
Snap-on mounting	—
Sealed shutter	Art.-no. 59042 see page 205
Protection plug-in current transformer	see page 142
Current transformer for tariff applications	see page 178



ASK 51.6

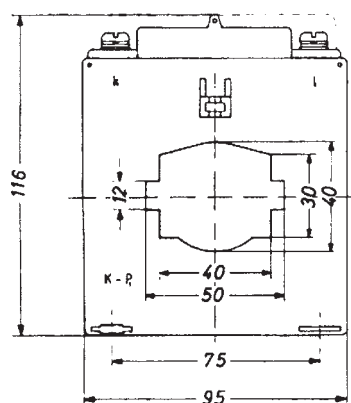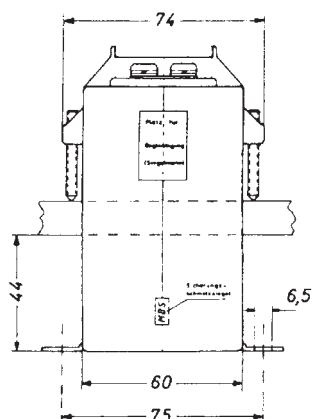Plug-in current transformer




Primary conductor	50 x 12 mm 40 x 30 mm
Round conductor	Ø 40 mm
Transformer width	95 mm
Snap-on mounting	—
Sealed shutter	Art.-no. 59044 see page 205
Protection plug-in current transformer	see page 144
Current transformer for tariff applications	see page 179

Secondary current		5A		1A	
Primary current A	Burden VA	Accuracy class		Accuracy class	
		1	0.5	1	0.5
		Art.-no.	Art.-no.	Art.-no.	Art.-no.
100	2.5	17058	17011	17258	17211
	5	17059	17012	17259	17212
150	2.5	17060	17013	17260	17213
	5	17061	17014	17261	17214
	10	17062	17015	17262	17215
200	2.5	17063	17016	17263	17216
	5	17064	17017	17264	17217
	10	17065	17018	17265	17218
250	2.5	17066	17019	17266	17219
	5	17067	17020	17267	17220
	10	17068	17021	17268	17221
	15	17069	17022	17269	17222
300	2.5		17023		17223
	5	17070	17024	17270	17224
	10	17071	17025	17271	17225
	15	17072	17026	17272	17226
	30	17073		17273	
400	2.5		17027		17227
	5	17074	17028	17274	17228
	10	17075	17029	17275	17229
	15	17076	17030	17276	17230
	30	17077		17277	
500	2.5		17031		17231
	5	17078	17032	17278	17232
	10	17079	17033	17279	17233
	15	17080	17034	17280	17234
	30	17081		17281	
600	2.5		17035		17235
	5	17082	17036	17282	17236
	10	17083	17037	17283	17237
	15	17084	17038	17284	17238
	30	17085		17285	
750	2.5		17039		17239
	5	17086	17040	17286	17240
	10	17087	17041	17287	17241
	15	17088	17042	17288	17242
	30	17089		17289	
800	10	17090	17044	17290	17244
	15	17091	17045	17291	17245
	30	17092		17292	
	45	17093		17293	
1000	5		17046		17246
	10	17094	17047	17294	17247
	15	17095	17048	17295	17248
	30	17096	17049	17296	17249
	45	17097		17297	
1200	5		17050		17250
	10	17098	17051	17298	17251
	15	17099	17052	17299	17252
	30	17100	17053	17300	17253
	45	17101		17301	
1250	5		17054		17254
	10	17102	17055	17302	17255
	15	17103	17056	17303	17256
	30	17104	17057	17304	17257
	45	17105		17305	



ASK 561.4

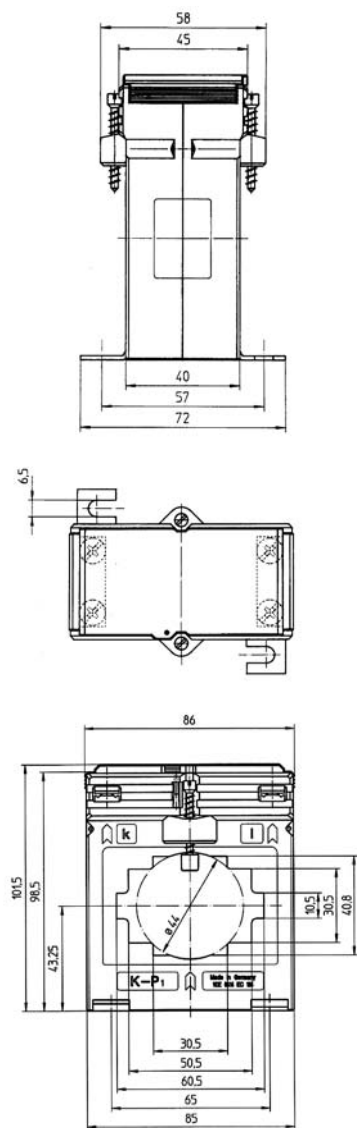Plug-in current transformer



Secondary current		5A		1A	
Primary current A	Burden VA	Accuracy class		Accuracy class	
		1	0.5	1	0.5
		Art.-no.	Art.-no.	Art.-no.	Art.-no.
200	2.5	18036		18236	
250	2.5	18037		18237	
	5	18038		18238	
300	2.5	18039	18012	18239	18212
	5	18040	18013	18240	18213
400	2.5	18042	18014	18242	18214
	5	18043	18015	18243	18215
	10	18044		18244	
500	2.5		18016		18216
	5	18045	18017	18245	18217
	10	18046		18246	
	15	18047		18247	
600	2.5		18018		18218
	5	18048	18019	18248	18219
	10	18049	18020	18249	18220
	15	18050		18250	
750	2.5		18021		18221
	5	18051	18022	18251	18222
	10	18052	18023	18252	18223
	15	18053		18253	
800	5	18097	18024	18254	18224
	10	18054	18025	18254	18225
	15	18055	18026	18255	18226
	30	18056		18256	
1000	5	18104	18027		18227
	10	18057	18028	18257	18228
	15	18058	18029	18258	18229
	30	18059		18259	
1200	5	18100	18030	18267	18230
	10	18060	18031	18260	18231
	15	18061	18032	18261	18232
	30	18062		18262	
1250	5	18102	18033		18233
	10	18063	18034	18263	18234
	15	18064	18035	18264	18235
	30	18065		18265	


Primary conductor	60 x 10 mm 30 x 40 mm 2 x 50 x 10 mm
Round conductor	Ø 44 mm
Transformer width	86 mm
Snap-on mounting	—
Sealed shutter	Art.-no. 59042 see page 205

Plug-in current transformers

ASK 61.4
ASK 61.4 2U
ASK 61.4 3U

Primary conductor

Round conductor
Transformer width




63 x 10 mm
2 x 50 x 10 mm
Ø 44 mm
96 mm

ASK 61.6

Primary conductor

Round conductor
Transformer width




60 x 10 mm
50 x 30 mm
Ø 40 mm
95 mm

ASK 63.4

Primary conductor


Round conductor
Transformer width



60 x 30 mm
50 x 40 mm
Ø 44 mm
96 mm

ASK 63.6

Primary conductor
Round conductor
Transformer width




60 x 30 mm
Ø 30 mm
88 mm

ASK 81.4
ASK 81.4 2U
ASK 81.4 3U

Primary conductor

Round conductor
Transformer width



80 x 10 mm
60 x 30 mm
2 x 60 x 10 mm
Ø 55 mm
120 mm

ASK 83.4

Primary conductor
Round conductor
Transformer width






84 x 34 mm
Ø 34 mm
96 mm



ASK 61.4

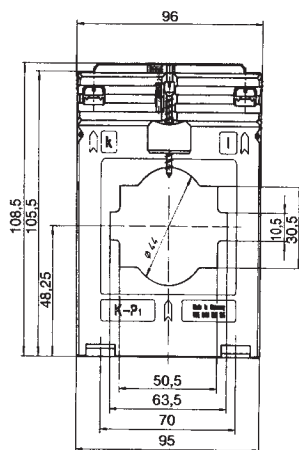Plug-in current transformer





Primary conductor	63 x 10 mm 2 x 50 x 10 mm
Round conductor	Ø 44 mm
Transformer width	96 mm
Snap-on mounting	—
Sealed shutter	Art.-no. 59042 see page 205
Protection plug-in current transformer	see page 148
Current transformer for tariff applications	see page 182

Secondary current		5A			1A	
Primary current A	Burden VA	Accuracy class			Accuracy class	
		1	0.5	0.2s	1	0.5
		Art.-no.	Art.-no.	Art.-no.	Art.-no.	Art.-no.
200	1.5	19047	19009		19247	19209
	2.5	19048	19010		19248	19210
250	1.5	19049	19011	V41-1804C	19249	19211
	2.5	19050	19012	V41-1804D	19250	19212
	5				19175	
300	1.5	19051	19013		19251	19213
	2.5	19052	19014	V41-1904D	19252	19214
	5	19053	19015	V41-1904F	19253	19215
400	1.5	19054	19016		19254	19216
	2.5	19055	19017	V41-2004D	19255	19217
	5	19056	19018	V41-2004F	19256	19218
	10	19057	19094	V41-2004H	19257	19294
500	1.5		19019			19219
	2.5	19058	19020	V41-2104D	19258	19220
	5	19059	19021	V41-2104F	19259	19221
	10	19060	19095	V41-2104H	19260	19295
	15	19061	19096		19261	19296
600	2.5	19062	19022	V41-2204D	19262	19222
	5	19063	19023	V41-2204F	19263	19223
	10	19064	19024	V41-2204H	19264	19224
	15	19065	19097	V41-2204J	19265	19297
750	2.5	19066	19025	V41-2304D	19266	19225
	5	19067	19026	V41-2304F	19267	19226
	10	19068	19027	V41-2304H	19268	19227
	15	19069	19098	V41-2304J	19269	19298
800	2.5	19070	19028		19270	19228
	5	19071	19029		19271	19229
	10	19072	19030		19272	19230
	15	19073	19031		19273	19231
1000	2.5			V41-2504D		
	5	19074	19032	V41-2504F	19274	19232
	10	19075	19033	V41-2504H	19275	19233
	15	19076	19034	V41-2504J	19276	19234
	30	19077	19099		19277	19299
1200	2.5			V41-2604D		
	5	19078	19035	V41-2604F	19278	19235
	10	19079	19036	V41-2604H	19279	19236
	15	19080	19037	V41-2604J	19280	19237
	30	19081	19100		19281	19300
1250	5	19082	19038	V41-2704F	19282	19238
	10	19083	19039	V41-2704H	19283	19239
	15	19084	19040	V41-2704J	19284	19240
	30	19085	19101		19285	19301
1500	5	19086	19041	V41-2804F	19286	19241
	10	19087	19042	V41-2804H	19287	19242
	15	19088	19043	V41-2804J	19288	19243
	30	19089	19102		19289	19302
1600	5	19090	19044		19290	19244
	10	19091	19045		19291	19245
	15	19092	19046		19292	19246
	30	19093	19103		19293	19303




ASK 61.4 2U

Plug-in current transformer



Secondary current		5A	1A
Primary current A	Burden VA	Accuracy class	Accuracy class
		1	1
		Art.-no.	Art.-no.
500-250	5-2.5	19141	19341
	600-300	19142	19342
800-400	10-5	19143	19343
	5-2.5	19144	19344
	10-5	19145	19345
1000-500	15-7.5	19146	19346
	5-2.5	19147	19347
	10-5	19148	19348
1200-600	15-7.5	19149	19349
	5-2.5	19150	19350
	10-5	19151	19351
1500-750	15-7.5	19152	19352
	5-2.5	19153	19353
	10-5	19154	19354
	15-7.5	19155	19355
1600-800	30-15	19156	19356
	5-2.5	19157	19357
	10-7.5	19158	19358
	15-7.5	19159	19359
	30-15	19160	19360

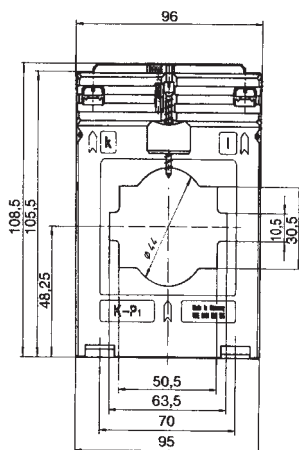ASK 61.4 3U





Secondary current		5A	1A
Primary current A	Burden VA	Accuracy class	Accuracy class
		1	1
		Art.-no.	Art.-no.
800-400-200	10-5-2.5	19182	19382
1000-500-250	10-5-2.5	19183	19383
	15-7.5-2.5	19184	19384
1000-600-300	10-5-2.5	19185	19385
	15-7.5-2.5	19186	19386
1200-600-300	10-5-2.5	19187	19387
	15-7.5-2.5	19188	19388
1500-750-400	10-5-2.5	19189	19389
	15-7.5-2.5	19190	19390
1600-800-400	10-5-2.5	19191	19391
	15-7.5-2.5	19192	19392
1000-600-400	10-5-2.5	19199	19399

Primary conductor	63 x 10 mm 2 x 50 x 10 mm
Round conductor	Ø 44 mm
Transformer width	96 mm
Snap-on mounting	—
Sealed shutter	Art.-no. 59042 see page 205
Protection plug-in current transformers	see page 148



ASK 61.6

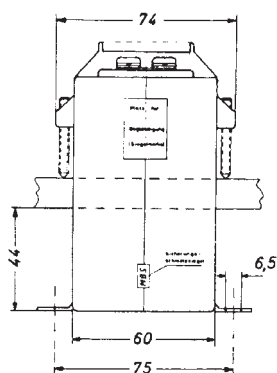Plug-in current transformer






Primary conductor	60 x 10 mm 50 x 30 mm
Round conductor	Ø 40 mm
Transformer width	95 mm
Snap-on mounting	—
Sealed shutter	Art.-no. 59044 see page 205
Current transformer for tariff applications	see page 183

Secondary current		5A		1A	
Primary current A	Burden VA	Accuracy class		Accuracy class	
		1	0.5	1	0.5
		Art.-no.	Art.-no.	Art.-no.	Art.-no.
100	1.5	20063	20011	20263	20211
	2.5	20064		20264	
150	1.5	20065	20012	20265	20212
	2.5	20066	20013	20266	20213
200	2.5	20067	20014	20267	20214
	5	20068	20015	20268	20215
	10	20069		20269	
250	2.5	20116	20016	20321	20216
	5	20070	20017	20270	20217
	10	20071	20018	20271	20218
	15	20072		20272	
300	2.5	20117	20019	20322	20219
	5	20073	20020	20273	20220
	10	20074	20021	20274	20221
	15	20075	20022	20275	20222
400	2.5	20118	20023	20323	20223
	5	20076	20024	20276	20224
	10	20077	20025	20277	20225
	15	20078	20026	20278	20226
	30	20079		20279	
500	2.5	20119	20027	20324	20227
	5	20080	20028	20280	20228
	10	20081	20029	20281	20229
	15	20082	20030	20282	20230
	30	20083		20283	
600	2.5	20120	20031	20325	20231
	5	20084	20032	20284	20232
	10	20085	20033	20285	20233
	15	20086	20034	20286	20234
	30	20087		20287	
750	2.5	20121	20035	20326	20235
	5	20088	20036	20288	20236
	10	20089	20037	20289	20237
	15	20090	20038	20290	20238
	30	20091		20291	
800	5	20092	20040	20292	20240
	10	20093	20041	20293	20241
	15	20094	20042	20294	20242
	30	20095		20295	
1000	5	20122	20043	20327	20243
	10	20096	20044	20296	20244
	15	20097	20045	20297	20245
	30	20098	20046	20298	20246
	45	20099		20299	
1200	5	20123	20047	20328	20247
	10	20100	20048	20300	20248
	15	20101	20049	20301	20249
	30	20102	20050	20302	20250
	45	20103		20303	
1250	5	20124	20051	20329	20251
	10	20104	20052	20304	20252
	15	20105	20053	20305	20253
	30	20106	20054	20306	20254
	45	20107		20307	
1500	5	20125	20055	20330	20255
	10	20108	20056	20308	20256
	15	20109	20057	20309	20257
	30	20110	20058	20310	20258
	45	20111		20311	
1600	10	20112	20060	20312	20260
	15	20113	20061	20313	20261
	30	20114	20062	20314	20262
	45	20115		20315	



ASK 63.4

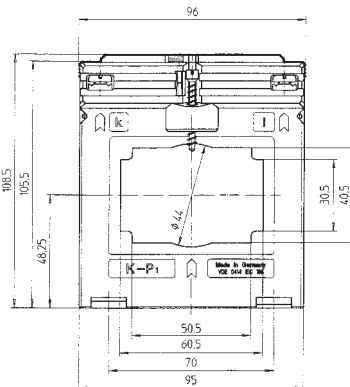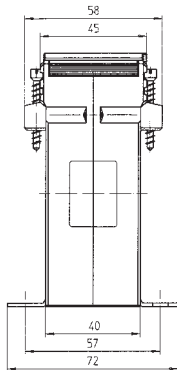Plug-in current transformer




Secondary current		5A		1A	
Primary current A	Burden VA	Accuracy class		Accuracy class	
		1	0.5	1	0.5
		Art.-no.	Art.-no.	Art.-no.	Art.-no.
300	1.5	25041	25011	25241	25211
	2.5	25042	25012	25242	25212
400	2.5	25043	25013	25243	25213
	5	25044	25014	25244	25214
500	5	25045	25015	25245	25215
	10	25046		25246	
600	5	25047	25017	25247	25217
	10	25048	25018	25248	25218
	15	25049		25249	
750	5	25050	25020	25250	25220
	10	25051	25021	25251	25221
	15	25052	25022	25252	25222
800	5	25053	25023	25253	25223
	10	25054	25024	25254	25224
	15	25055	25025	25255	25225
1000	5	25056	25026	25256	25226
	10	25057	25027	25257	25227
	15	25058	25028	25258	25228
1200	5	25059	25029	25259	25229
	10	25060	25030	25260	25230
	15	25061	25031	25261	25231
1250	5	25062	25032	25262	25232
	10	25063	25033	25263	25233
	15	25064	25034	25264	25234
1500	5	25065	25035	25265	25235
	10	25066	25036	25266	25236
	15	25067	25037	25267	25237
1600	5	25068	25038	25268	25238
	10	25069	25039	25269	25239
	15	25070	25040	25270	25240
1800	5	25078	25071	25278	25271
	10	25079	25072	25279	25272
	15	25080	25073	25280	25273
2000	5	25081	25074	25281	25274
	10	25082	25076	25282	25276
	15	25083	25077	25283	25277

Primary conductor	60 x 30 mm 50 x 40 mm
Round conductor	Ø 44 mm
Transformer width	96 mm
Snap-on mounting	—
Sealed shutter	Art.-no. 59042 see page 205



ASK 63.6

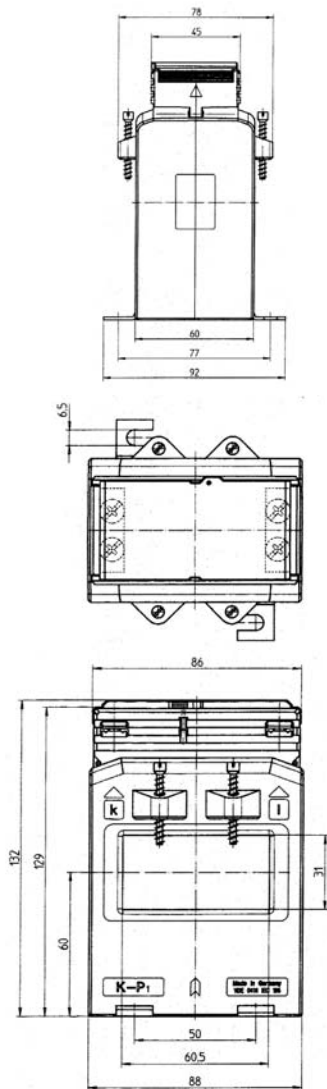Plug-in current transformer






Primary conductor	60 x 30 mm
Round conductor	Ø 30 mm
Transformer width	88 mm
Snap-on mounting	—
Sealed shutter	Art.-no. 59042 see page 205
Protection plug-in current transformer	see page 152
Current transformer for tariff applications	see page 184

Secondary current		5A		1A	
Primary current A	Burden VA	Accuracy class		Accuracy class	
		1	0.5	1	0.5
		Art.-no.	Art.-no.	Art.-no.	Art.-no.
200	1.5	85060		85260	
	2.5	85061		85261	
250	1.5	85062	85011	85262	85211
	2.5	85063	85012	85263	85212
	5				
300	1.5	85064	85013	85264	85213
	2.5	85065	85014	85265	85214
	5	85066	85015	85266	85215
	10	85067		85267	
400	2.5	85068	85017	85268	85217
	5	85069	85018	85269	85218
	10	85071			
500	2.5	85073	85021	85273	85221
	5	85074	85022	85274	85222
	10	85075		85275	
	15	85076		85276	
600	2.5	85077	85025	85277	85225
	5	85078	85026	85278	85226
	10	85079	85027	85279	85227
	15	85080		85280	
750	2.5	85081	85029	85281	85229
	5	85082	85030	85282	85230
	10	85083	85031	85283	85231
	15	85084		85284	
	30				
800	2.5	85085	85033	85285	85233
	5	85086	85034	85286	85234
	10	85087	85035	85287	85235
	15	85088	85036	85288	85236
1000	5	85089	85037	85289	85237
	10	85090	85038	85290	85238
	15	85091	85039	85291	85239
	30	85092		85292	
1200	5	85093	85041	85293	85241
	10	85094	85042	85294	85242
	15	85095	85043	85295	85243
	30	85096	85044	85296	85244
1250	5	85097	85045	85297	85245
	10	85098	85046	85298	85246
	15	85099	85047	85299	85247
	30	85100		85300	
1500	5	85101	85049	85301	85249
	10	85102	85050	85302	85250
	15	85103	85051	85303	85251
	30	85104		85304	
1600	5	85105	85053	85305	85253
	10	85106	85054	85306	85254
	15	85107	85055	85307	85255
	30	85108		85308	
2000	5	85109	85056	85309	85256
	10	85110	85057	85310	85257
	15	85111	85058	85311	85258
	30	85112	85059	85312	85259



ASK 81.4

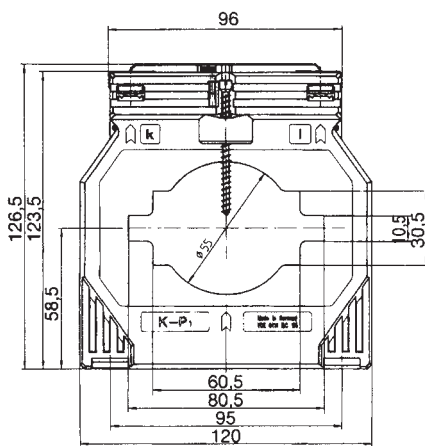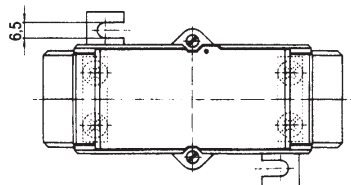Plug-in current transformer



Primary conductor	80 x 10 mm 60 x 30 mm 2 x 60 x 10 mm
Round conductor	Ø 55 mm
Transformer width	120 mm
Snap-on mounting	—
Sealed shutter	Art.-no. 59042 see page 205
Current transformer for tariff applications	see page 185


Secondary current		5A			1A	
Primary current A	Burden VA	Accuracy class			Accuracy class	
		1	0.5	0.2s	1	0.5
		Art.-no.	Art.-no.	Art.-no.	Art.-no.	Art.-no.
400	2.5	21038	21009	V47-2004D	21238	21209
	5	21039	21010	V47-2004F	21239	21210
	10		21197			
500	2.5	21040	21011	V47-2104D	21240	21211
	5	21041	21135	V47-2104F	21241	21335
	10	21042	21078		21242	21278
600	2.5	21043	21012	V47-2204D	21243	21212
	5	21044	21013	V47-2204F	21244	21213
	10	21045	21014	V47-2204H	21245	21214
750	2.5	21046	21015	V47-2304D	21246	21215
	5	21047	21016	V47-2304F	21247	21216
	10	21048	21017	V47-2304H	21248	21217
	15	21049	21079		21249	21279
800	2.5	21050	21018		21250	21218
	5	21051	21019		21251	21219
	10	21052	21020		21252	21220
	15	21053	21080		21253	21280
1000	2.5	21084		V47-2504D		
	5	21054	21021	V47-2504F	21254	21221
	10	21055	21022	V47-2504H	21255	21222
	15	21056	21023	V47-2504J	21256	21223
	30	21057			21257	
1200	5	21058	21024	V47-2604F	21258	21224
	10	21059	21025	V47-2604H	21259	21225
	15	21060	21026	V47-2604J	21260	21226
	30	21061			21261	
1250	5	21062	21027	V47-2704F	21262	21227
	10	21063	21028	V47-2704H	21263	21228
	15	21064	21029	V47-2704J	21264	21229
	30	21065			21265	
1500	5	21085	21030	V47-2804F		21230
	10	21066	21031	V47-2804H	21266	21231
	15	21067	21032	V47-2804J	21267	21232
	30	21068			21268	
	45	21069			21269	
1600	5	21086	21033			21233
	10	21070	21034		21270	21234
	15	21071	21035		21271	21235
	30	21072			21272	
	45	21073			21273	
2000	10	21074	21036		21274	21236
	15	21075	21037		21275	21237
	30	21076			21276	
	45	21077			21277	

Change-over transformers see page 76.




ASK 81.4 2U


Plug-in current transformer



Secondary current		5A	1A
Primary current A	Burden VA	Accuracy class	Accuracy class
		1	1
		Art.-no.	Art.-no.
1000-500	10-5	21120	21320
	15-7.5	21121	21321
1200-600	10-5	21122	21322
	15-7.5	21123	21323
1500-750	10-5	21124	21324
	15-7.5	21125	21325
	30-15	21126	21326
1600-800	10-5	21127	21327
	15-7.5	21128	21328
	30-15	21129	21329
2000-1000	10-5	21130	21330
	15-7.5	21131	21331
	30-15	21132	21332



ASK 81.4 3U

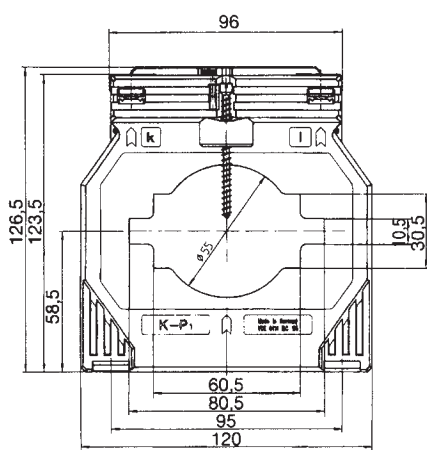

Secondary current		5A	1A
Primary current A	Burden VA	Accuracy class	Accuracy class
		1	1
		Art.-no.	Art.-no.
2000-1500-1000	30-15-10	21160	21360
2000-1000-500	30-10-5	21161	21361
1600-800-400	15-10-5	21162	21362
1500-1000-500	15-10-5	21163	21363
1200-800-600	15-10-5	21164	21364
1500-1000-750	15-10-5	21165	21365
1000-750-500	10-5-2.5	21166	21366




Primary conductor	80 x 10 mm 60 x 30 mm 2 x 60 x 10 mm
Round conductor	Ø 55 mm
Transformer width	120 mm
Snap-on mounting	—
Sealed shutter	Art.-no. 59042 see page 205





ASK 83.4

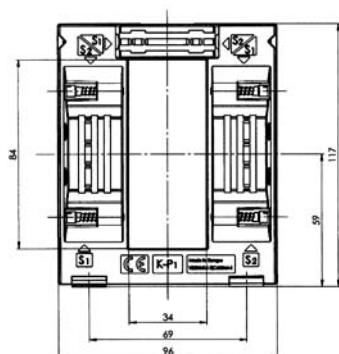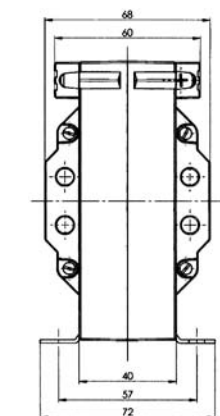Plug-in current transformer



Secondary current		5A		1A	
Primary current A	Burden VA	Accuracy class		Accuracy class	
		1	0.5	1	0.5
		Art.-no.	Art.-no.	Art.-no.	Art.-no.
300	1.5	100051-x	100011-x	100251-x	100211-x
	2.5	100052-x	100012-x	100252-x	100212-x
400	2.5	100053-x	100013-x	100253-x	100213-x
	5	100054-x	100014-x	100254-x	100214-x
500	2.5	100055-x	100015-x	100255-x	100215-x
	5	100056-x	100016-x	100256-x	100216-x
600	2.5	100057-x	100017-x	100257-x	100217-x
	5	100058-x	100018-x	100258-x	100218-x
	10	100059-x		100259-x	
750	2.5	100060-x	100019-x	100260-x	100219-x
	5	100061-x	100020-x	100261-x	100220-x
	10	100062-x	100021-x	100262-x	100221-x
	15	100063-x		100263-x	
800	2.5	100064-x	100022-x	100264-x	100222-x
	5	100065-x	100023-x	100265-x	100223-x
	10	100066-x	100024-x	100266-x	100224-x
	15	100067-x		100267-x	
1000	5	100068-x	100025-x	100268-x	100225-x
	10	100069-x	100026-x	100269-x	100226-x
	15	100070-x	100027-x	100270-x	100227-x
1200	5	100071-x	100028-x	100271-x	100228-x
	10	100072-x	100029-x	100272-x	100229-x
	15	100073-x	100030-x	100273-x	100230-x
1250	5	100074-x	100031-x	100274-x	100231-x
	10	100075-x	100032-x	100275-x	100232-x
	15	100076-x	100033-x	100276-x	100233-x
1500	5	100077-x	100034-x	100277-x	100234-x
	10	100078-x	100035-x	100278-x	100235-x
	15	100079-x	100036-x	100279-x	100236-x
1600	5	100080-x	100037-x	100280-x	100237-x
	10	100081-x	100038-x	100281-x	100238-x
	15	100082-x	100039-x	100282-x	100239-x
	30	100083-x		100283-x	
1800	10	100084-x	100040-x	100284-x	100240-x
	15	100085-x	100041-x	100285-x	100241-x
	30	100086-x		100286-x	
2000	10	100087-x	100042-x	100287-x	100242-x
	15	100088-x	100043-x	100288-x	100243-x
	30	100089-x		100289-x	
2500	10	100090-x	100044-x	100290-x	100244-x
	15	100091-x	100045-x	100291-x	100245-x
	30	100092-x		100292-x	

Connection options see page 79.

Primary conductor	84 x 34 mm
Round conductor	Ø 34 mm
Transformer width	96 mm





ASK 83.4

Plug-in current transformer

Connection options

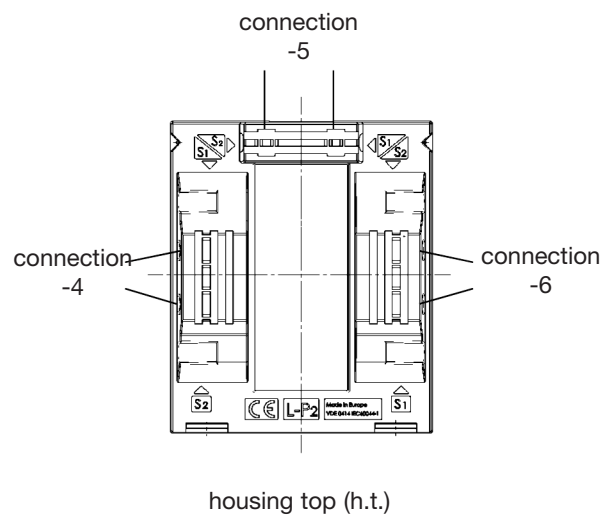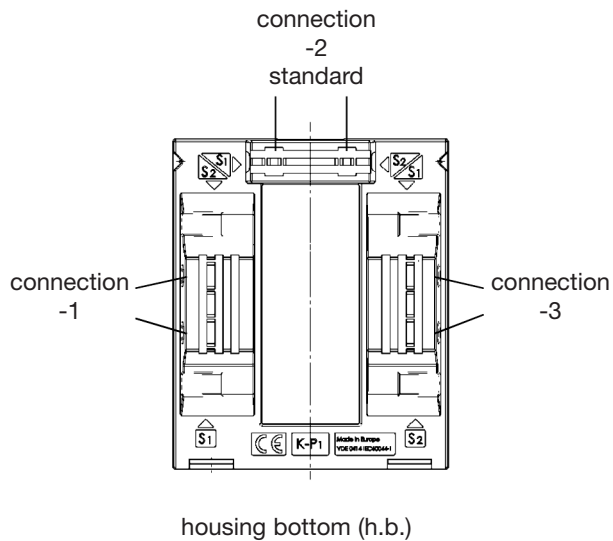The plug-in current transformer ASK 83.4 is a multipurpose transformer which can be installed vertically or horizontally. There are 6 connection options to choose from.



Order example

ASK 83.4 800/5 10/1

Connection option K-P₁ (h.b.) top

Art.-no. 100066-2




Plug-in current transformers

ASK 101.4 ASK 101.4 2U

Primary conductor

Round conductor
Transformer width




100 x 10 mm
2 x 80 x 10 mm
Ø 70 mm
130 mm

ASK 103.3

Primary conductor

Round conductor
Transformer width



2 x 100 x 10 mm
3 x 80 x 10 mm
Ø 85 mm
172 mm

ASK 103.41 ASK 103.41 2U


Primary conductor
Round conductor
Transformer width



103 x 41 mm
Ø 40 mm
99 mm

ASK 105.6


Primary conductor
Round conductor
Transformer width



100 x 55 mm
Ø 55 mm
129 mm

ASK 105.6N

Primary conductor
Round conductor
Transformer width




100 x 55 mm
Ø 55 mm
129 mm

ASK 123.3

Primary conductor


Round conductor
Transformer width



123 x 30 mm
3 x 100 x 10 mm
Ø 100 mm
172 mm

ASK 127.4


Primary conductor
Round conductor
Transformer width



120 x 70 mm
Ø 70 mm
159 mm

ASK 127.6

Primary conductor
Round conductor
Transformer width






120 x 72 mm
Ø 72 mm
205 mm



ASK 101.4

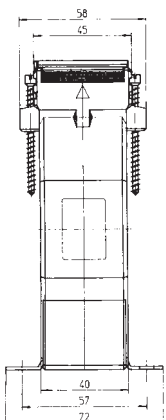Plug-in current transformer






Primary conductor	100 x 10 mm 2 x 80 x 10 mm
Round conductor	Ø 70 mm
Transformer width	130 mm
Snap-on mounting	—
Sealed shutter	Art.-no. 59042 see page 205

Secondary current		5A		1A	
Primary current A	Burden VA	Accuracy class		Accuracy class	
		1	0.5	1	0.5
		Art.-no.	Art.-no.	Art.-no.	Art.-no.
500	2.5		22009		22209
	5	22076	22010	22276	22210
	10	22077		22277	
600	2.5		22011		22211
	5	22038	22012	22238	22212
	10	22039	22239		
750	2.5		22013		22213
	5	22040	22014	22240	22214
	10	22041	22078	22241	22281
800	5	22042	22015	22242	22215
	10	22043	22016	22243	22216
	15	22044		22244	
1000	5	22045	22017	22245	22217
	10	22046	22018	22246	22218
	15	22047		22247	
	30	22115		22278	
1200	5	22048	22019	22248	22219
	10	22049	22020	22249	22220
	15	22050		22250	
	30	22051		22251	
1250	5	22052	22021	22252	22221
	10	22053	22022	22253	22222
	15	22054		22254	
	30	22055		22255	
1500	5	22056	22023	22256	22223
	10	22057	22024	22257	22224
	15	22058	22025	22258	22279
	30	22059		22259	
1600	5		22026		22226
	10	22060	22027	22260	22227
	15	22061	22028	22261	22228
	30	22062		22262	
	45	22063		22263	
1800	5		22029		22229
	10	22064	22030	22264	22230
	15	22065	22031	22265	22231
	30	22066		22266	
	45	22067		22267	
2000	5		22032		22232
	10	22068	22033	22268	22233
	15	22069	22034	22269	22234
	30	22070	22118	22270	22280
	45	22071		22271	
2500	5		22035		22235
	10	22072	22036	22272	22236
	15	22073	22037	22273	22237
	30	22074	22119	22274	22337
	45	22075		22275	



ASK 101.4 2U

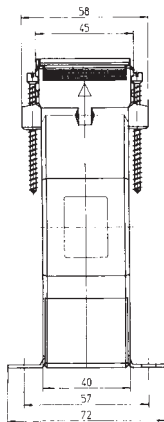Plug-in current transformer




Secondary current		5A	1A
Primary current A	Burden VA	Accuracy class 1	Accuracy class 1
		Art.-no.	Art.-no.
1200-600	10-5	22120	22320
	15-7.5	22121	22321
1500-750	10-5	22122	22322
	15-7.5	22123	22323
1600-800	10-5	22124	22324
	15-7.5	22125	22325
	30-15	22126	22326
2000-1000	10-5	22127	22327
	15-7.5	22128	22328
	30-15	22129	22329
2500-1250	10-5	22130	22330
	15-7.5	22131	22331
	30-15	22132	22332

Primary conductor	100 x 10 mm 2 x 80 x 10 mm
Round conductor	Ø 70 mm
Transformer width	130 mm
Snap-on mounting	—
Sealed shutter	Art.-no. 59042 see page 205




ASK 103.3

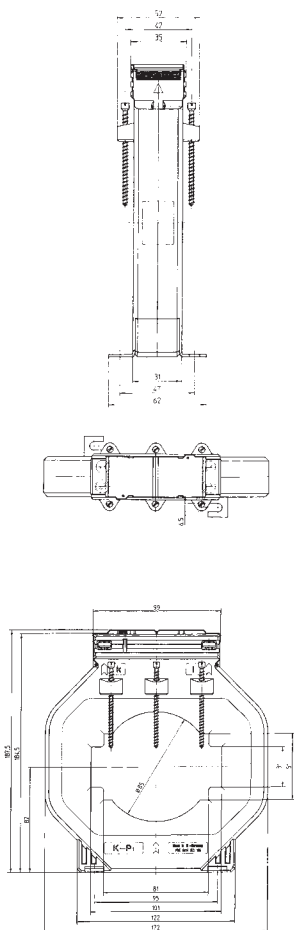Plug-in current transformer






Secondary current		5A		1A	
Primary current A	Burden VA	Accuracy class		Accuracy class	
		1	0.5	1	0.5
		Art.-no.	Art.-no.	Art.-no.	Art.-no.
750	2.5		23011		23211
	5	23036		23236	
	10	23037		23237	
800	2.5		23012		23212
	5	23038	23013	23238	23213
	10	23039		23239	
	15	23040		23240	
1000	5	23041	23014	23241	23214
	10	23042	23015	23242	23215
	15	23043	23016	23243	23216
1200	5	23044	23017	23244	23217
	10	23045	23018	23245	23218
	15	23046	23019	23246	23219
	30	23047		23247	
1250	5	23048	23020	23248	23220
	10	23049	23021	23249	23221
	15	23050	23022	23250	23222
	30	23051		23251	
1500	10	23052	23023	23252	23223
	15	23053	23024	23253	23224
	30	23054		23254	
	45	23055		23255	
1600	10	23056	23025	23256	23225
	15	23057	23026	23257	23226
	30	23058		23258	
	45	23059		23259	
2000	10	23060	23027	23260	23227
	15	23061	23028	23261	23228
	30	23062	23029	23262	23229
	45	23063		23263	
2500	10	23064	23030	23264	23230
	15	23065	23031	23265	23231
	30	23066	23032	23266	23232
	45	23067		23267	
3000	10	23068	23033	23268	23233
	15	23069	23034	23269	23234
	30	23070	23035	23270	23235
	45	23071		23271	

Primary conductor	2 x 100 x 10 mm 3 x 80 x 10 mm
Round conductor	Ø 85 mm
Transformer width	172 mm
Snap-on mounting	—
Sealed shutter 2 pieces	Art.-no. 59040 see page 205

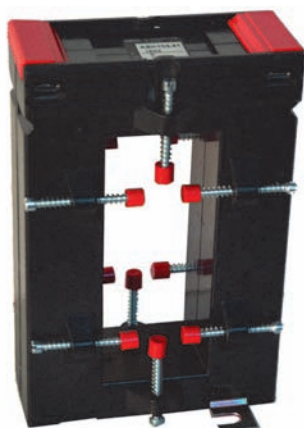

ASK 103.41

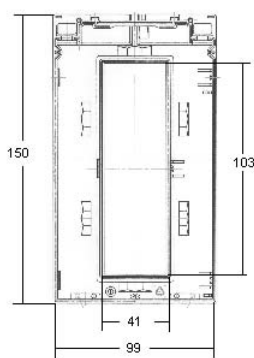Plug-in current transformer



Secondary current		5A		1A	
Primary current A	Burden VA	Accuracy class		Accuracy class	
		1	0.5	1	0.5
		Art.-no.	Art.-no.	Art.-no.	Art.-no.
400	2.5	97051	97021	97251	97221
	5	97052		97252	
500	2.5	97053	97023	97253	97223
	5	97054		97254	
600	2.5	97055	97025	97255	97225
	5	97056		97256	
750	2.5	97057	97027	97257	97227
	5	97058		97258	
800	5	97059	97029	97259	97229
	10	97060		97260	
1000	10	97061	97031	97261	97231
	15	97062		97262	
1200	10	97063	97033	97263	97233
	15	97064		97264	
1250	10	97065	97035	97265	97235
	15	97066		97266	
1500	15	97067	97037	97267	97237
	30	97068		97268	
2000	15	97069	97039	97269	97239
	30	97070		97270	

ASK 103.41 2U


Secondary current		5A		1A	
Primary current A	Burden VA	Accuracy class		Accuracy class	
		1	0.5	1	0.5
		Art.-no.	Art.-no.	Art.-no.	Art.-no.
1000-500	5-2.5	97081	97071	97281	97271
1200-600	5-2.5	97082	97072	97282	97272
1500-750	10-5	97083	97073	97283	97273
	15-7.5	97084		97284	
2000-1000	15-7.5	97085	97075	97285	97275
	30-15	97086		97286	

Primary conductor	103 x 41 mm
Round conductor	Ø 40 mm
Transformer width	99 mm
Snap-on mounting	—
Sealed shutter	—



ASK 105.6

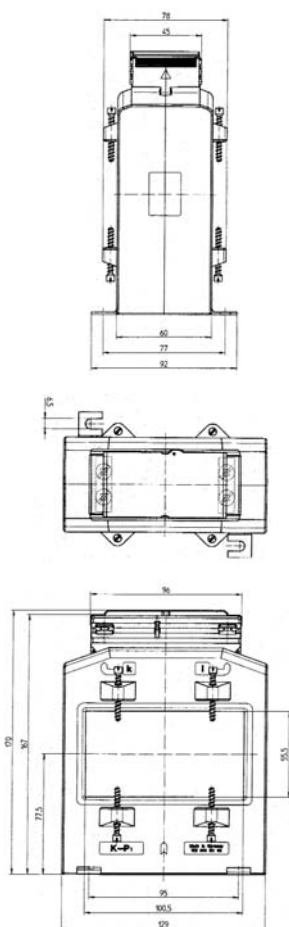Plug-in current transformer



Primary conductor	100 x 55 mm
Round conductor	Ø 55 mm
Transformer width	129 mm
Snap-on mounting	—
Sealed shutter	Art.-no. 59042 see page 205
Protection plug-in current transformer	see page 153
Current transformer for tariff applications	see page 188




Secondary current		5A			1A	
Primary current A	Burden VA	Accuracy class			Accuracy class	
		1	0.5	0.2s	1	0.5
		Art.-no.	Art.-no.	Art.-no.	Art.-no.	Art.-no.
600	2.5		86083	V55-2204D		86283
	5	86092	86084		86292	86284
	10	86093			86293	
750	2.5		86086	V55-2304D		86286
	5	86095	86087	V55-2304F	86295	86287
	10	86096	86157		86296	
800	5	86097	86089	V55-2404F	86297	86289
	10	86098	86090	V55-2404H	86298	86290
1000	2.5		86158	V55-2504D		
	5	86051	86011	V55-2504F	86251	86211
	10	86052	86159	V55-2504H	86252	
	15		86160		86299	
1200	5	86053	86013	V55-2604F	86253	86213
	10	86054	86014	V55-2604H	86254	86214
	15	86055	86015		86255	86215
1250	5	86056	86016	V55-2704F	86256	86216
	10	86057	86017	V55-2704H	86257	86217
	15	86058	86018	V55-2704J	86258	86218
	30		86162			
1500	5	86059	86019	V55-2804F	86259	86219
	10	86060	86020	V55-2804H	86260	86220
	15	86061	86021	V55-2804J	86261	86221
	30	86062	86163		86262	
1600	5	86110	86164	V55-2904F		
	10	86142	86165	V55-2904H	86331	86338
	15	86101	86149	V55-2904J	86330	86339
	30	86138	86166		86337	86340
1800	5	86063	86023		86263	86223
	10	86064	86024		86264	86224
	15	86065	86025		86265	86225
	30	86066			86266	
2000	5		86167	V55-3004F		
	10	86067	86027	V55-3004H	86267	86227
	15	86068	86028	V55-3004J	86268	86228
	30	86069	86029		86269	86229
	45	86070			86270	
2400	5		86168	V55-3104F		
	10		86169	V55-3104H		
	15		86170	V55-3104J		
	30		86171			
2500	5		86172	V55-3204F		
	10	86071	86031	V55-3204H	86271	86231
	15	86072	86032	V55-3204J	86272	86232
	30	86073	86033		86273	86233
	45	86074			86274	
3000	5		86173	V55-3304F		
	10	86075	86035	V55-3304H	86275	86235
	15	86076	86036	V55-3304J	86276	86236
	30	86077	86037		86277	86237
	45	86078			86278	



ASK 105.6 N

Plug-in current transformer

Secondary current		5A		1A	
Primary current A	Burden VA	Accuracy class		Accuracy class	
		1	0.5	1	0.5
		Art.-no.	Art.-no.	Art.-no.	Art.-no.
2500	10	86451	86481	86411	86431
	15	86452	86482	86412	86432
	30	86453	86483	86413	86433
	45	86454		86414	
3000	10	86455	86484	86415	86434
	15	86456	86485	86416	86435
	30	86457	86486	86417	86436
	45	86458		86418	
4000	10	86459	86487	86419	86437
	15	86460	86488	86420	86438
	30	86461	86489	86421	86439
	45	86462		86422	
5000	10	86463	86490	86423	86440
	15	86464	86491	86424	86441
	30	86465	86492	86425	86442
	45	86466		86426	

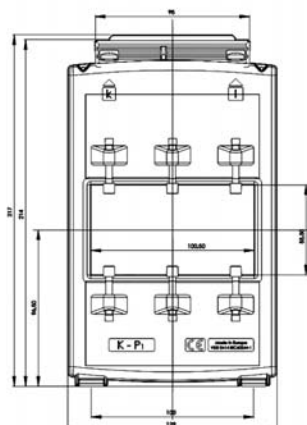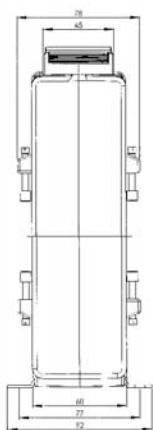


Primary conductor	100 x 55 mm
Round conductor	Ø 55 mm
Transformer width	129 mm
Snap-on mounting	—
Sealed shutter	Art.-no. 59042 see page 205




ASK 123.3

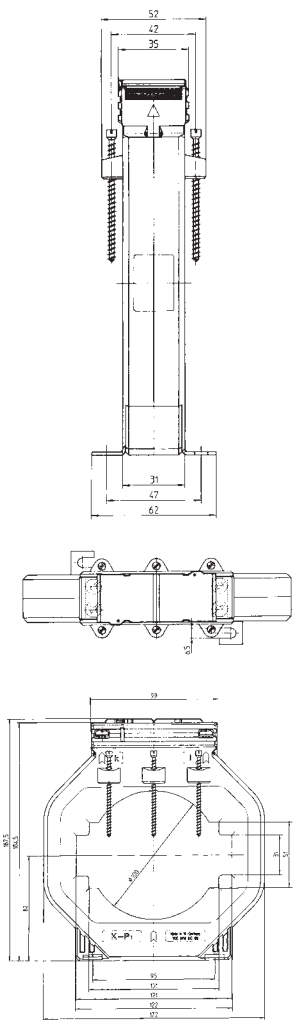Plug-in current transformer





Secondary current		5A			1A	
Primary current A	Burden VA	Accuracy class			Accuracy class	
		1	0.5	0.2s	1	0.5
		Art.-no.	Art.-no.	Art.-no.	Art.-no.	Art.-no.
750	2.5		24127			
	5		24128			
	10		24129			
1000	2.5		24010	V56-2504D		
	5	24037	24011	V56-2504F	24237	24211
	10	24038	24126		24238	24125
1200	5	24039	24012	V56-2604F	24239	24212
	10	24040	24013		24240	24213
	15	24041	24014		24241	24214
1250	5	24042	24015	V56-2704F	24242	24215
	10	24043	24016	V56-2704H	24243	24216
	15	24044	24017		24244	24217
1500	5	24045	24018	V56-2804F	24245	24218
	10	24046	24019	V56-2804H	24246	24219
	15	24047	24020		24247	24220
	30	24048	24130		24248	
1600	5	24112		V56-2904F		
	10	24107		V56-2904H		
	15	24113		V56-2904J		
	30	24108	24131			
1800	5	24049	24021		24249	24221
	10	24050	24022		24250	24222
	15	24051	24023		24251	24223
	30	24052			24252	
2000	5		24024	V56-3004F		24224
	10	24053	24025	V56-3004H	24253	24225
	15	24054	24026	V56-3004J	24254	24226
	30	24055	24027		24255	24227
	45	24056			24256	
2500	5		24136	V56-3204F		
	10	24057	24028	V56-3204H	24257	24228
	15	24058	24029	V56-3204J	24258	24229
	30	24059	24030		24259	24230
	45	24060			24260	
3000	5		24137	V56-3304F		
	10	24061	24031	V56-3304H	24261	24231
	15	24062	24032	V56-3304J	24262	24232
	30	24063	24033		24263	24233
	45	24064			24264	
4000	10	24065	24034		24265	24234
	15	24066	24035		24266	24235
	30	24067	24036		24267	24236
	45	24068			24268	

Primary conductor	123 x 30 mm 3 x 100 x 10 mm
Round conductor	Ø 100 mm
Transformer width	172 mm
Snap-on mounting	—
Sealed shutter	Art.-no. 59040
2 pieces	see page 205
Tariff current transformer	
tariff applications	see page 189

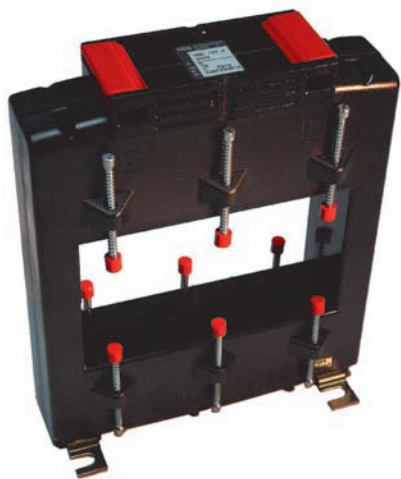

ASK 127.4

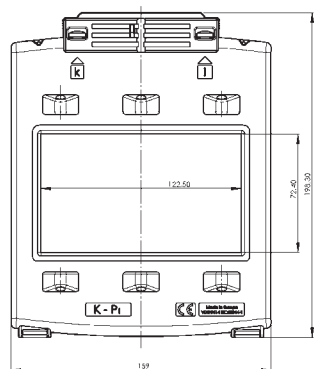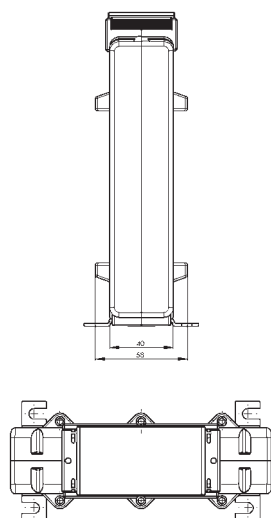Plug-in current transformer






Secondary current		5A		1A	
Primary current A	Burden VA	Accuracy class		Accuracy class	
		1	0.5	1	0.5
		Art.-no.	Art.-no.	Art.-no.	Art.-no.
1000	5	87540	87510	87640	87610
	10	87541	87511	87641	87611
1200	5	87542	87512	87642	87612
	10	87543	87513	87643	87613
	15	87544	87514	87644	87614
1250	10	87545	87515	87645	87615
	15	87546	87516	87646	87616
	30	87547	87517	87647	87617
1500	10	87548	87518	87648	87618
	15	87549	87519	87649	87619
	30	87550	87520	87650	87620
1600	10	87551	87521	87651	87621
	15	87552	87522	87652	87622
	30	87553	87523	87653	87623
1800	10	87554	87524	87654	87624
	15	87555	87525	87655	87625
	30	87556	87526	87656	87626
2000	10	87557	87527	87657	87627
	15	87558	87528	87658	87628
	30	87559	87529	87659	87629
	45	87560	87530	87660	87630
2500	10	87561	87531	87661	87631
	15	87562	87532	87662	87632
	30	87563	87533	87663	87633
	45	87564	87534	87664	87634

Primary conductor	120 x 70 mm
Round conductor	Ø 70 mm
Transformer width	159 mm
Snap-on mounting	—
Sealed shutter	Art.-no. 59042 see page 205



ASK 127.6

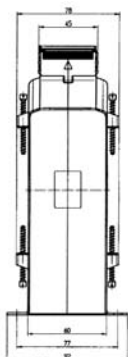Plug-in current transformer



Secondary current		5A		1A	
Primary current A	Burden VA	Accuracy class		Accuracy class	
		1	0.5	1	0.5
		Art.-no.	Art.-no.	Art.-no.	Art.-no.
1000	5	87055	87011	87255	87211
	10	87056		87256	
1200	5	87057	87013	87257	87213
	10	87058	87014	87258	87214
	15	87059		87259	
1250	5	87060	87016	87260	87216
	10	87061	87017	87261	87217
	15	87062	87018	87262	87218
	30	87063	87019	87263	87219
1500	5	87064	87020	87264	87220
	10	87065	87021	87265	87221
	15	87066	87022	87266	87222
	30	87067	87023	87267	87223
1800	5	87068	87024	87268	87224
	10	87069	87025	87269	87225
	15	87070	87026	87270	87226
	30	87071	87027	87271	87227
2000	10	87072	87028	87272	87228
	15	87073	87029	87273	87229
	30	87074	87030	87274	87230
	45	87075		87275	
2500	10	87076	87032	87276	87232
	15	87077	87033	87277	87233
	30	87078	87034	87278	87234
	45	87079		87279	
3000	10	87081	87036	87281	87236
	15	87082	87037	87282	87237
	30	87083	87038	87283	87238
	45	87084		87284	
4000	10	87085	87040	87285	87240
	15	87086	87041	87286	87241
	30	87087	87042	87287	87242
	45	87088		87288	
5000	10	87089	87044	87289	87244
	15	87090	87045	87290	87245
	30	87091	87046	87291	87246
	45	87092		87292	
6000	10	87093	87048	87293	87248
	15	87094	87049	87294	87249
	30	87095	87050	87295	87250
	45	87096		87296	

Primary conductor	120 x 70 mm
Round conductor	Ø 70 mm
Transformer width	159 mm
Snap-on mounting	—
Sealed shutter	Art.-no. 59042 see page 205

Plug-in current transformers

ASK 128.4


Primary conductor
Round conductor
Transformer width



128 x 38 mm
Ø 38 mm
100 mm

ASK 129.10

Primary conductor
Round conductor
Transformer width



120 x 90 mm
Ø 90 mm
250 mm

ASK 130.3

Primary conductor
Round conductor
Transformer width



130 x 25 mm
Ø 25 mm
180 mm

ASK 130.5

Primary conductor
Round conductor
Transformer width






130 x 30 mm
Ø 30 mm
180 mm



ASK 128.4

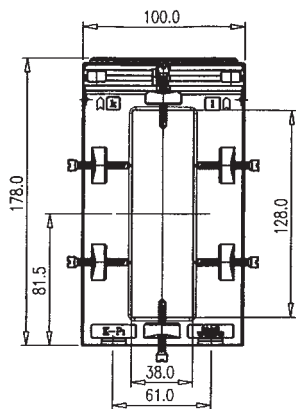Plug-in current transformer




Secondary current		5A		1A	
Primary current A	Burden VA	Accuracy class		Accuracy class	
		1	0.5	1	0.5
		Art.-no.	Art.-no.	Art.-no.	Art.-no.
400	2.5	94041	94011	94241	94211
	5	94042		94242	
500	2.5	94043	94013	94243	94213
	5	94044		94244	
600	2.5	94045	94015	94245	94215
	5	94046		94246	
750	2.5	94047	94017	94247	94217
	5	94048		94248	
800	5	94049	94019	94249	94219
	10	94050		94250	
1000	10	94051	94021	94251	94221
	15	94052		94252	
1200	10	94053	94023	94253	94223
	15	94054		94254	
1250	10	94055	94025	94255	94225
	15	94056		94256	
1500	15	94057	94027	94257	94227
	30	94058		94258	
	30	94059	94029	94259	94229
2000	15	94060		94260	
	30	94061	94031	94261	94231
2500	30	94062		94262	

Primary conductor	128 x 38 mm
Round conductor	Ø 38 mm
Transformer width	100 mm
Snap-on mounting	—
Sealed shutter	Art.-no. 59042 see page 205




ASK 129.10

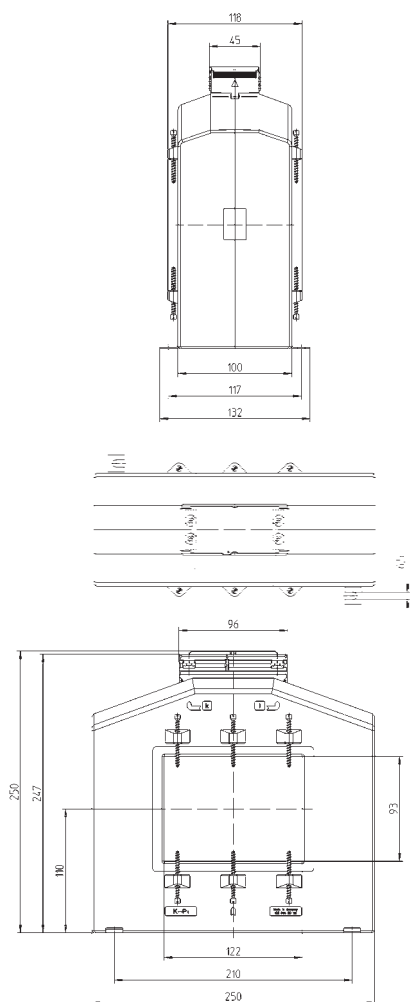Plug-in current transformer






Secondary current		5A		1A	
Primary current A	Burden VA	Accuracy class		Accuracy class	
		1	0.5	1	0.5
		Art.-no.	Art.-no.	Art.-no.	Art.-no.
1000	5	88070	88011	88270	88211
	10	88071		88271	
	15	88072		88272	
1200	5	88073	88014	88273	88214
	10	88074	88015	88274	88215
	15	88075		88275	
1250	5	88076	88017	88276	88217
	10	88077	88018	88277	88218
	15	88078		88278	
1500	10	88079	88020	88279	88220
	15	88080	88021	88280	88221
	30	88081	88022	88281	88222
1600	10	88082	88023	88282	88223
	15	88083	88024	88283	88224
	30	88084	88025	88284	88225
1800	10	88085	88026	88285	88226
	15	88086	88027	88286	88227
	30	88087	88028	88287	88228
2000	10	88088	88029	88288	88229
	15	88089	88030	88289	88230
	30	88090	88031	88290	88231
2500	15	88091	88032	88291	88232
	30	88092	88033	88292	88233
	45	88093	88034	88293	88234
3000	15	88094	88035	88294	88235
	30	88095	88036	88295	88236
	45	88096	88037	88296	88237
4000	15	88097	88038	88297	88238
	30	88098	88039	88298	88239
	45	88099	88040	88299	88240
5000	15	88100	88041	88300	88241
	30	88101	88042	88301	88242
	45	88102	88043	88302	88243
6000	15	88103	88044	88303	88244
	30	88104	88045	88304	88245
	45	88105	88046	88305	88246
7500	15	88106	88047	88306	88247
	30	88107	88048	88307	88248
	45	88108	88049	88308	88249

Primary conductor	120 x 90 mm
Round conductor	Ø 90 mm
Transformer width	250 mm
Snap-on mounting	—
Sealed shutter	Art.-no. 59042 see page 205

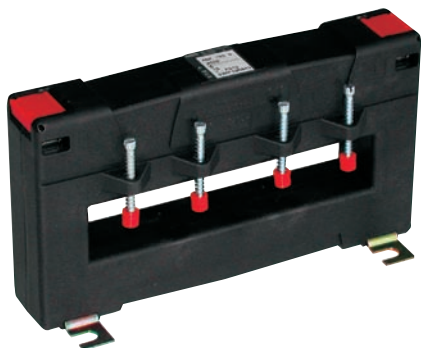

ASK 130.3

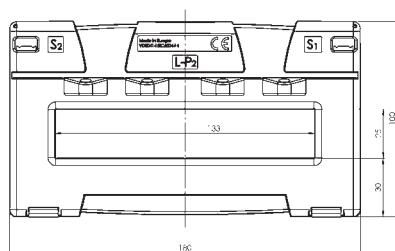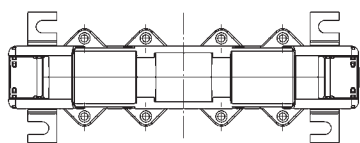Plug-in current transformer






Secondary current		5A			1A	
Primary current A	Burden VA	Accuracy class			Accuracy class	
		1	0.5	0.2s	1	0.5
		Art.-no.	Art.-no.	Art.-no.	Art.-no.	Art.-no.
300	2.5	I50-1900D	I50-1901D		I50-1910D	I50-1911D
	5	I50-1900F	I50-1901F		I50-1910F	I50-1911F
400	2.5	I50-2000D	I50-2001D		I50-2010D	I50-2011D
	5	I50-2000F	I50-2001F		I50-2010F	I50-2011F
	10	I50-2000H	I50-2001H		I50-2010H	I50-2011H
500	2.5	I50-2100D	I50-2101D		I50-2110D	I50-2111D
	5	I50-2100F	I50-2101F		I50-2110F	I50-2111F
	10	I50-2100H	I50-2101H		I50-2110H	I50-2111H
600	2.5	I50-2200D	I50-2201D		I50-2210D	I50-2211D
	5	I50-2200F	I50-2201F		I50-2210F	I50-2211F
	10	I50-2200H	I50-2201H		I50-2210H	I50-2211H
	15	I50-2200J			I50-2210J	
750	2.5	I50-2300D	I50-2301D	V50-2304D	I50-2310D	I50-2311D
	5	I50-2300F	I50-2301F		I50-2310F	I50-2311F
	10	I50-2300H	I50-2301H		I50-2310H	I50-2311H
	15	I50-2300J	I50-2301J		I50-2310J	I50-2311J
1000	5	I50-2500F	I50-2501F	V50-2504F V50-2504H	I50-2510F	I50-2511F
	10	I50-2500H	I50-2501H		I50-2510H	I50-2511H
	15	I50-2500J	I50-2501J		I50-2510J	I50-2511J
	30	I50-2500L			I50-2510L	
1200	5	I50-2600F	I50-2601F	V50-2604F V50-2604H	I50-2610F	I50-2611F
	10	I50-2600H	I50-2601H		I50-2610H	I50-2611H
	15	I50-2600J	I50-2601J		I50-2610J	I50-2611J
	30	I50-2600L			I50-2610L	
1250	5	I50-2700F	I50-2701F	V50-2704F V50-2704H V50-2704J	I50-2710F	I50-2711F
	10	I50-2700H	I50-2701H		I50-2710H	I50-2711H
	15	I50-2700J	I50-2701J		I50-2710J	I50-2711J
	30	I50-2700L			I50-2710L	
1500	5	I50-2800F	I50-2801F	V50-2804F V50-2804H V50-2804J	I50-2810F	I50-2811F
	10	I50-2800H	I50-2801H		I50-2810H	I50-2811H
	15	I50-2800J	I50-2801J		I50-2810J	I50-2811J
	30	I50-2800L	I50-2801L		I50-2810L	I50-2811L
1600	5	I50-2900F	I50-2901F	V50-2904F V50-2904H V50-2904J	I50-2910F	I50-2911F
	10	I50-2900H	I50-2901H		I50-2910H	I50-2911H
	15	I50-2900J	I50-2901J		I50-2910J	I50-2911J
	30	I50-2900L	I50-2901L		I50-2910L	I50-2911L

Primary conductor	130 x 25 mm
Round conductor	Ø 25 mm
Transformer width	180 mm
Snap-on mounting	—
Sealed shutter	—
Current transformer for tariff applications	see page 190



ASK 130.5

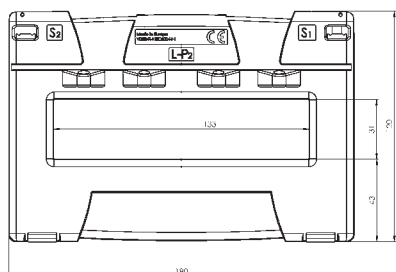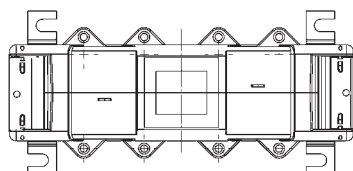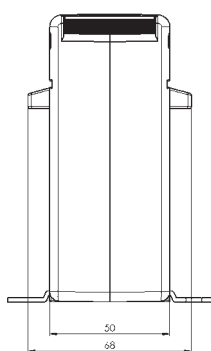Plug-in current transformer



Primary conductor	130 x 30 mm
Round conductor	Ø 30 mm
Transformer width	180 mm
Snap-on mounting	—
Sealed shutter	—
Current transformer for tariff applications	see page 191

Secondary current		5A			1A	
Primary current A	Burden VA	Accuracy class			Accuracy class	
		1	0.5	0.2s	1	0.5
		Art.-no.	Art.-no.	Art.-no.	Art.-no.	Art.-no.
300	2.5	I51-1900D	I51-1901D		I51-1910D	I51-1911D
	5	I51-1900F	I51-1901F		I51-1910F	I51-1911F
	10	I51-1900H	I51-1901H		I51-1910H	I51-1911H
400	2.5	I51-2000D	I51-2001D		I51-2010D	I51-2011D
	5	I51-2000F	I51-2001F		I51-2010F	I51-2011F
	10	I51-2000H	I51-2001H		I51-2010H	I51-2011H
500	2.5	I51-2100D	I51-2101D		I51-2110D	I51-2111D
	5	I51-2100F	I51-2101F		I51-2110F	I51-2111F
	10	I51-2100H	I51-2101H		I51-2110H	I51-2111H
	15	I51-2100J	I51-2101J		I51-2110J	I51-2111J
600	2.5	I51-2200D	I51-2201D			I51-2211D
	5	I51-2200F	I51-2201F		I51-2210F	I51-2211F
	10	I51-2200H	I51-2201H		I51-2210H	I51-2211H
	15	I51-2200J	I51-2201J		I51-2210J	I51-2211J
750	2.5	I51-2300D	I51-2301D	V51-2304D	I51-2310D	
	5	I51-2300F	I51-2301F	V51-2304F	I51-2310F	I51-2311F
	10	I51-2300H	I51-2301H		I51-2310H	I51-2311H
	15	I51-2300J	I51-2301J		I51-2310J	I51-2311J
1000	5	I51-2500F	I51-2501F	V51-2504F	I51-2510F	I51-2511F
	10	I51-2500H	I51-2501H	V51-2504H	I51-2510H	I51-2511H
	15	I51-2500J	I51-2501J		I51-2510J	I51-2511J
	30	I51-2500L	I51-2501L		I51-2510L	I51-2511L
1200	5	I51-2600F	I51-2601F	V51-2604F	I51-2610F	I51-2611F
	10	I51-2600H	I51-2601H	V51-2604H	I51-2610H	I51-2611H
	15	I51-2600J	I51-2601J	V51-2604J	I51-2610J	I51-2611J
	30	I51-2600L	I51-2601L		I51-2610L	I51-2611L
1250	5	I51-2700F	I51-2701F	V51-2704F	I51-2710F	I51-2711F
	10	I51-2700H	I51-2701H	V51-2704H	I51-2710H	I51-2711H
	15	I51-2700J	I51-2701J	V51-2704J	I51-2710J	I51-2711J
	30	I51-2700L	I51-2701L		I51-2710L	I51-2711L
	45	I51-2700M				
1500	5	I51-2800F	I51-2801F	V51-2804F	I51-2810F	I51-2811F
	10	I51-2800H	I51-2801H	V51-2804H	I51-2810H	I51-2811H
	15	I51-2800J	I51-2801J	V51-2804J	I51-2810J	I51-2811J
	30	I51-2800L	I51-2801L		I51-2810L	I51-2811L
	45	I51-2800M				
1600	5	I51-2900F	I51-2901F	V51-2904F	I51-2910F	I51-2911F
	10	I51-2900H	I51-2901H	V51-2904H	I51-2910H	I51-2911H
	15	I51-2900J	I51-2901J	V51-2904J	I51-2910J	I51-2911J
	30	I51-2900L	I51-2901L		I51-2910L	I51-2911L
	45	I51-2900M				
2000	10	I51-3000H	I51-3001H	V51-3004H	I51-3010H	I51-3011H
	15	I51-3000J	I51-3001J	V51-3004J	I51-3010J	I51-3011J
	30	I51-3000L	I51-3001L		I51-3010L	I51-3011L
	45	I51-3000M	I51-3001M			
2400	10	I51-3100H	I51-3101H	V51-3104H	I51-3110H	I51-3111H
	15	I51-3100J	I51-3101J	V51-3104J	I51-3110J	I51-3111J
	30	I51-3100L	I51-3101L		I51-3110L	I51-3111L
	45	I51-3100M	I51-3101M			
2500	10	I51-3200H	I51-3201H	V51-3204H	I51-3210H	I51-3211H
	15	I51-3200J	I51-3201J	V51-3204J	I51-3210J	I51-3211J
	30	I51-3200L	I51-3201L	V51-3204L	I51-3210L	I51-3211L
	45	I51-3200M	I51-3201M			
3000	10	I51-3300H	I51-3301H	V51-3304H	I51-3310H	I51-3311H
	15	I51-3300J	I51-3301J	V51-3304J	I51-3310J	I51-3311J
	30	I51-3300L	I51-3301L	V51-3304L	I51-3310L	I51-3311L
	45	I51-3300M				
3200	10	I51-3400H	I51-3401H	V51-3404H	I51-3410H	I51-3411H
	15	I51-3400J	I51-3401J	V51-3404J	I51-3410J	I51-3411J
	30	I51-3400L	I51-3401L	V51-3404L	I51-3410L	I51-3411L
	45	I51-3400M			I51-3410M	



Low voltage current transformers for industrial applications Wound current transformers

WSK 30	Transformer width	61 mm
WSK 40	Transformer width	71 mm
WSK 40 N	Transformer width	71 mm
<i>NEW</i>		
WSK 60	Transformer width	71 mm
WSK 70.6	Transformer width	60 mm
WSK 70.6 N	Transformer width	60 mm
WSK 31.5	Transformer width	70 mm

Wound current transformers

Based on the physical operating principle of current transformers, the required core volume transferring an amount of power, increases rapidly with a decreasing nominal current. As there are limits on increasing the transformer size, wound current transformers are being used.

Interim current transformers also belong to the group of wound current transformers. This construction is mainly used for primary currents of up to 10 A, and achieves a transformation at a higher or lower secondary current values. In addition to their application in adapting a measuring circuit on existing measuring units, interim current transformers are being used also for lowering the power loss by the transmission of analogically measured values over great distances. This is made possible by means of a squared dependence of the power loss from the flowing current.

$$P_V = I^2 \times Z \text{ [VA]}$$

apparent power [VA]

This means when the original nominal current is halved, the conductor loss drops down to 25 % of its original value.

Indication: The selection of the nominal power of the initially activated main transformer is achieved through the application of the following measurement comparisons.




$$P_{GH} = P_Z \times \left(\frac{I_2}{I_1} \right)^2 + P_E + P_{HZ}$$

P_{GH}	apparent power of the main transformer
P_Z	secondary performance of the interim transformer (nominal performance inclusive of conductor losses)
P_E	consumption of the interim transformer by nominal current
P_{HZ}	conductor losses between main- and interim transformer by nominal current
I_1	primary nominal current of the interim transformer
I_2	secondary nominal current of the interim transformer




WSK 30

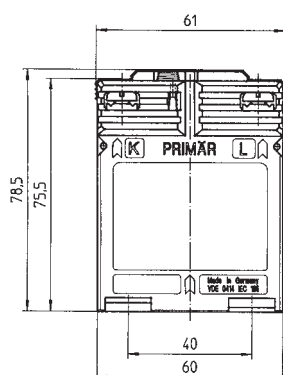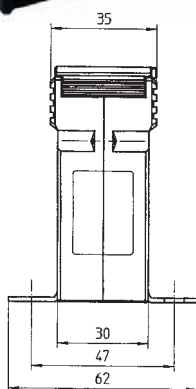Wound current transformer



Secondary current		5A		1A	
Primary current A	Burden VA	Accuracy class		Accuracy class	
		1	0.5	1	0.5
		Art.-no.	Art.-no.	Art.-no.	Art.-no.
1	2.5	30017	30011	30217	30211
	5	30018		30218	
2.5	2.5	30019	30012	30219	30212
	5	30020		30220	
5	2.5	30021	30013	30221	30213
	5	30022		30222	
10	2.5	30023	30014	30223	30214
	5	30024		30224	
15	2.5	30025	30015	30225	30215
	5	30026		30226	
20	2.5	30027	30016	30227	30216
	5	30028		30228	




Snap-on mounting

Primary conductor	—
Round conductor	—
Transformer width	61 mm
Snap-on mounting	Art.-no. 53011 see page 204
Sealed shutter	Art.-no. 59040 see page 205




WSK 40

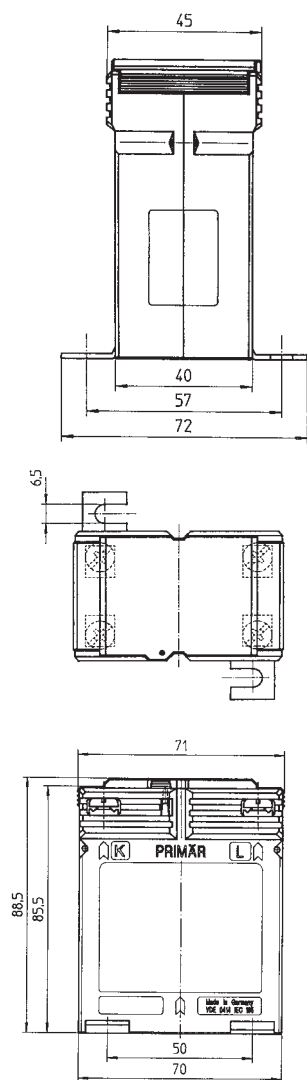Wound current transformer



Secondary current		5A		1A	
Primary current A	Burden VA	Accuracy class		Accuracy class	
		1	0.5	1	0.5
		Art.-no.	Art.-no.	Art.-no.	Art.-no.
1	2.5	31044	31011	31244	31211
	5	31045	31012	31245	31212
	10	31046	31013	31246	31213
	15	31047	31014	31247	31214
2.5	2.5	31048	31015	31248	31215
	5	31049	31016	31249	31216
	10	31050	31017	31250	31217
	15	31051	31018	31251	31218
5	2.5	31052	31019	31252	31219
	5	31053	31020	31253	31220
	10	31054	31021	31254	31221
	15	31055	31022	31255	31222
10	2.5	31056	31023	31256	31223
	5	31057	31024	31257	31224
	10	31058	31025	31258	31225
	15	31059	31026	31259	31226
15	2.5	31060	31027	31260	31227
	5	31061	31028	31261	31228
	10	31062	31029	31262	31229
	15	31063	31030	31263	31230
20	2.5	31064	31031	31264	31231
	5	31065	31032	31265	31232
	10	31066	31033	31266	31233
	15	31067	31034	31267	31234
25	2.5	31068	31035	31268	31235
	5	31069	31036	31269	31236
	10	31070	31037	31270	31237
	15	31071	31038	31271	31238
30	2.5	31072	31039	31272	31239
	5	31073	31040	31273	31240
	10	31074	31041	31274	31241



Snap-on mounting





Primary conductor	—
Round conductor	—
Transformer width	71 mm
Snap-on mounting	Art.-no. 55012 see page 204
Sealed shutter	Art.-no. 59041 see page 205



WSK 40 N

Wound current transformer

Secondary current		5A		1A	
Primary current A	Burden VA	Accuracy class		Accuracy class	
		1	0.5	1	0.5
		Art.-no.	Art.-no.	Art.-no.	Art.-no.
30	2.5	31161	31151	31361	31351
	5	31162	31152	31362	31352
	10	31163	31153	31363	31353
40	2.5	31164	31154	31364	31354
	5	31165	31155	31365	31355
	10	31166	31156	31366	31356
50	2.5	31167	31157	31367	31357
	5	31168	31158	31368	31358
	10	31169	31159	31369	31359

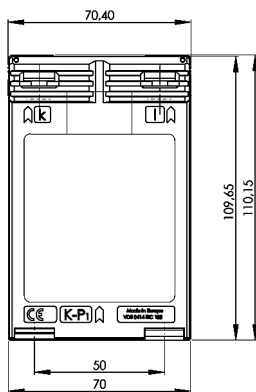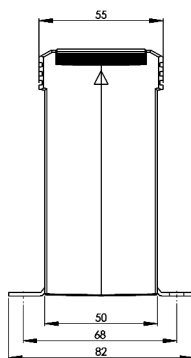




Snap-on mounting

Primary conductor	—
Round conductor	—
Transformer width	71 mm
Snap-on mounting	Art.-no. 55011 see page 204
Sealed shutter	Art.-no. 59041 see page 205



WSK 60

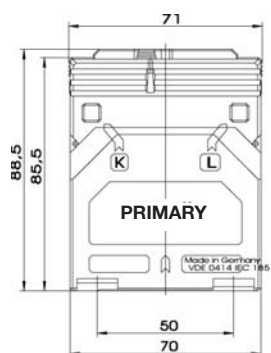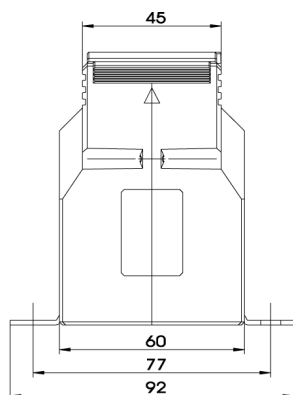Wound current transformer





Secondary current		5A		1A	
Primary current A	Burden VA	Accuracy class		Accuracy class	
		1	0.5	1	0.5
		Art.-no.	Art.-no.	Art.-no.	Art.-no.
5	2.5	35041	35011	35241	35211
	5	35042	35012	35242	35212
	10	35043	35013	35243	35213
	15	35044		35244	
10	2.5	35045	35014	35245	35214
	5	35046	35015	35246	35215
	10	35047	35016	35247	35216
	15	35048		35248	
15	2.5	35049	35017	35249	35217
	5	35050	35018	35250	35218
	10	35051	35019	35251	35219
	15	35052		35252	
20	2.5	35053	35020	35253	35220
	5	35054	35021	35254	35221
	10	35055	35022	35255	35222
	15	35056		35256	
25	2.5	35057	35023	35257	35223
	5	35058	35024	35258	35224
	10	35059	35025	35259	35225
	15	35060		35260	
30	2.5	35061	35026	35261	35226
	5	35062	35027	35262	35227
	10	35063	35028	35263	35228
	15	35064		35264	

Primary conductor	—
Round conductor	—
Transformer width	71 mm
Snap-on mounting	—
Sealed shutter	Art.-no. 59041 see page 205



WSK 70.6

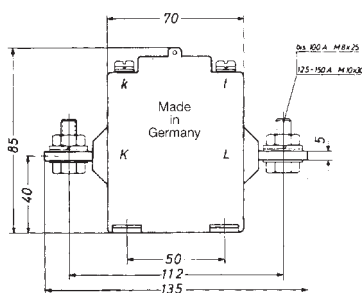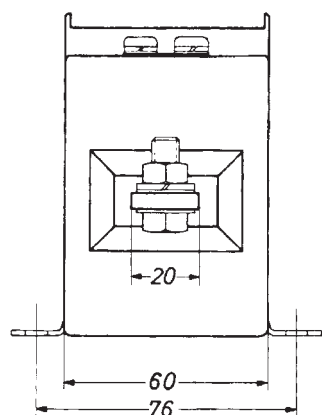Wound current transformer






Secondary current		5A		1A	
Primary current A	Burden VA	Accuracy class		Accuracy class	
		1	0.5	1	0.5
		Art.-no.	Art.-no.	Art.-no.	Art.-no.
25	2.5	32038	32011	32238	32211
	5	32039	32012	32239	32212
	10	32040	32013	32240	32213
	15	32041		32241	
30	2.5	32042	32014	32242	32214
	5	32043	32015	32243	32215
	10	32044	32016	32244	32216
	15	32045		32245	
40	2.5	32046	32017	32246	32217
	5	32047	32018	32247	32218
	10	32048	32019	32248	32219
	15	32049		32249	
50	2.5	32050	32020	32250	32220
	5	32051	32021	32251	32221
	10	32052	32022	32252	32222
	15	32053		32253	
60	2.5	32054	32023	32254	32223
	5	32055	32024	32255	32224
	10	32056	32025	32256	32225
	15	32057		32257	
75	2.5	32058	32026	32258	32226
	5	32059	32027	32259	32227
	10	32060	32028	32260	32228
	15	32061		32261	
80	2.5	32062	32029	32262	32229
	5	32063	32030	32263	32230
	10	32064	32031	32264	32231
	15	32065		32265	
100	2.5	32066	32032	32266	32232
	5	32067	32033	32267	32233
	10	32068	32034	32268	32234
	15	32069		32269	

Primary conductor	—
Round conductor	—
Transformer width	60 mm
Snap-on mounting	—
Sealed shutter	Art.-no. 59043 see page 205



WSK 70.6 N

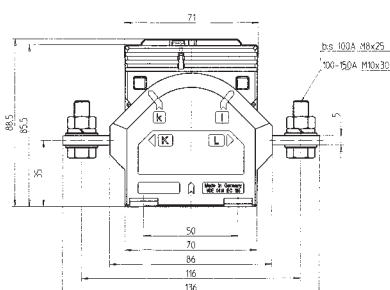Wound current transformer







Secondary current		5A		1A	
Primary current A	Burden VA	Accuracy class		Accuracy class	
		1	0.5	1	0.5
		Art.-no.	Art.-no.	Art.-no.	Art.-no.
25	2.5	89047	89011	89247	89211
	5	89048	89012	89248	89212
	10	89049	89013	89249	89213
	15	89050		89250	
30	2.5	89051	89015	89251	89215
	5	89052	89016	89252	89216
	10	89053	89017	89253	89217
	15	89054		89254	
40	2.5	89055	89019	89255	89219
	5	89056	89020	89256	89220
	10	89057	89021	89257	89221
	15	89058		89258	
50	2.5	89059	89023	89259	89223
	5	89060	89024	89260	89224
	10	89061	89025	89261	89225
	15	89062		89262	
60	2.5	89063	89027	89263	89227
	5	89064	89028	89264	89228
	10	89065	89029	89265	89229
	15	89066		89266	
75	2.5	89067	89031	89267	89231
	5	89068	89032	89268	89232
	10	89069	89033	89269	89233
	15	89070		89270	
80	2.5	89071	89035	89271	89235
	5	89072	89036	89272	89236
	10	89073	89037	89273	89237
	15	89074		89274	
100	2.5	89075	89039	89275	89239
	5	89076	89040	89276	89240
	10	89077	89041	89277	89241
	15	89078		89278	

Primary conductor	—
Round conductor	—
Transformer width	60 mm
Snap-on mounting	—
Sealed shutter	Art.-no. 59041 see page 205

WSK 31.5

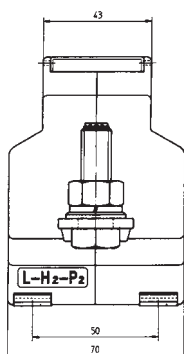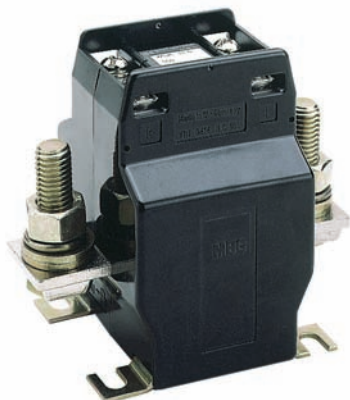
Wound current transformer



Secondary current		5A		1A	
Primary current A	Burden VA	Accuracy class		Accuracy class	
		1	0.5	1	0.5
		Art.-no.	Art.-no.	Art.-no.	Art.-no.
25	2.5	33047	33011	33247	33211
	5	33048	33012	33248	33212
	10	33049	33013	33249	33213
	15	33050	33014	33250	33214
30	2.5	33051	33015	33251	33215
	5	33052	33016	33252	33216
	10	33053	33017	33253	33217
	15	33054	33018	33254	33218
40	2.5	33055	33019	33255	33219
	5	33056	33020	33256	33220
	10	33057	33021	33257	33221
	15	33058	33022	33258	33222
50	2.5	33059	33023	33259	33223
	5	33060	33024	33260	33224
	10	33061	33025	33261	33225
	15	33062	33026	33262	33226
60	2.5	33063	33027	33263	33227
	5	33064	33028	33264	33228
	10	33065	33029	33265	33229
	15	33066	33030	33266	33230
75	2.5	33067	33031	33267	33231
	5	33068	33032	33268	33232
	10	33069	33033	33269	33233
	15	33070	33034	33270	33234
80	2.5	33071	33035	33271	33235
	5	33072	33036	33272	33236
	10	33073	33037	33273	33237
	15	33074	33038	33274	33238
100	2.5	33075	33039	33275	33239
	5	33076	33040	33276	33240
	10	33077	33041	33277	33241
	15	33078	33042	33278	33242
150	2.5	33079	33043	33279	33243
	5	33080	33044	33280	33244
	10	33081	33045	33281	33245
	15	33082	33046	33282	33246

Primary conductor	—
Round conductor	—
Transformer width	70 mm
Snap-on mounting	—
Sealed shutter	Art.-no. 59045 see page 205
Current transformer for tariff applications	see page 194

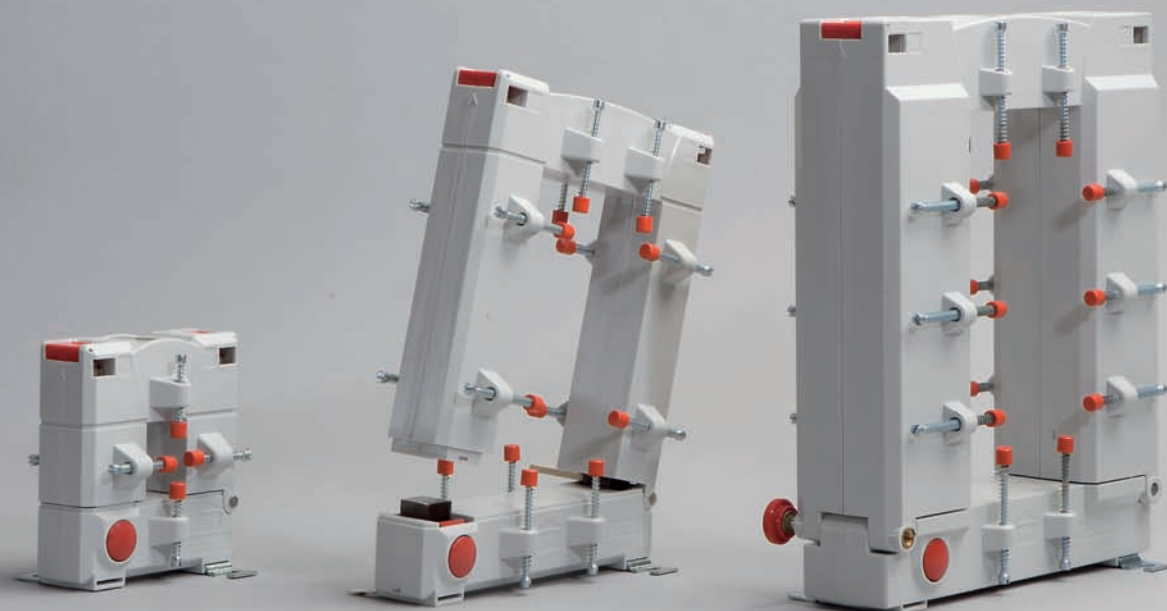Split core current transformers, series KBU



www.mbs-stromwandler.de

Split core current transformers

KBU 23

Primary conductor
Transformer width

20 x 30 mm
93 mm



KBU 58

Primary conductor
Transformer width

50 x 80 mm
125 mm



KBU 812

Primary conductor
Transformer width

80 x 120 mm
155 mm



KBU 816

Primary conductor
Transformer width


80 x 160 mm
195 mm







KBU 23

Split core current transformer



Secondary current		5A		1A	
Primary current A	Burden VA	Accuracy class		Accuracy class	
		1	0.5	1	0.5
		Art.-no.	Art.-no.	Art.-no.	Art.-no.
100	1.25	80041		80241	
150	1.5	80042		80242	
200	1.5	80043		80243	
250	1.5	80044		80244	
300	1.5		80035		80235
	3.75	80045		80245	
400	2.5		80036		80236
	5	80046		80246	

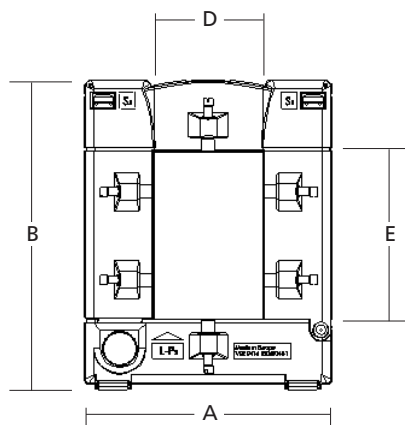KBU 58







Secondary current		5A		1A	
Primary current A	Burden VA	Accuracy class		Accuracy class	
		1	0.5	1	0.5
		Art.-no.	Art.-no.	Art.-no.	Art.-no.
250	1		80051		80251
	1.5	80061		80261	
300	1.5		80052		80252
	2.5	80062		80262	
400	1.5		80053		80253
	2.5	80063		80263	
500	2.5		80054		80254
	5	80064		80264	
600	2.5		80055		80255
	5	80065		80265	
750	2.5		80056		80256
	5	80066		80266	
800	2.5		80057		80257
	7.5	80067		80267	
1000	5		80058		80258
	10	80068		80268	

Type	KBU 23	KBU 58
A	93	125
B	106	158
C/C1	34/58	34/58
D	20	50
E	30	80

KBU 812

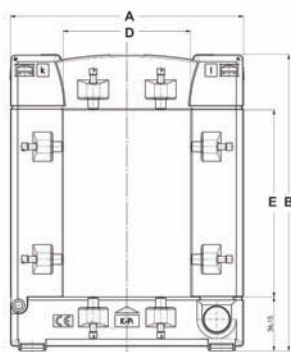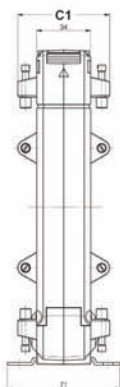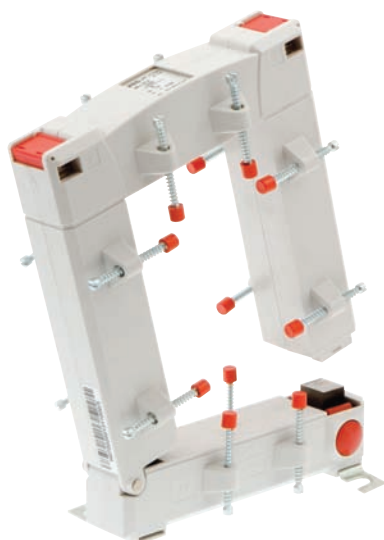Split core current transformer



Type	KBU 812	KBU 816
A	155	195
B	198	243
C/C1	34/58	64/79
D	80	80
E	120	160

Secondary current		5A		1A	
Primary current A	Burden VA	Accuracy class		Accuracy class	
		1	0.5	1	0.5
		Art.-no.	Art.-no.	Art.-no.	Art.-no.
250	1	80091	80071	80291	80271
	1.5				
300	1.5	80092	80072	80292	80272
	2.5				
400	1.5	80093	80073	80293	80273
	2.5				
500	2.5	80094	80074	80294	80274
	5				
600	2.5	80095	80075	80295	80275
	5				
750	2.5	80096	80076	80296	80276
	5				
800	2.5	80097	80077	80297	80277
	7.5				
1000	5	80098	80078	80298	80278
	10				
1200	5	80099	80079	80299	80279
	10				
1250	7.5	80100	80080	80300	80280
	15				
1500	7.5	80101	80081	80301	80281
	15				

KBU 816

Secondary current		5A		1A	
Primary current A	Burden VA	Accuracy class		Accuracy class	
		1	0.5	1	0.5
		Art.-no.	Art.-no.	Art.-no.	Art.-no.
1000	10	80140	80110	80340	80310
	15	80141		80341	
1200	10	80142	80111	80342	80311
	15	80143		80343	
1500	10	80144	80112	80344	80312
	15	80145	80113	80345	80313
1600	10	80146	80114	80346	80314
	15	80147	80115	80347	80315
2000	10	80148	80116	80348	80316
	15	80149	80117	80349	80317
2500	10	80150	80119	80350	80319
	15	80151	80120	80351	80320
3000	15	80152	80122	80352	80322
	30	80153		80353	
4000	15	80154	80123	80354	80323
	30	80155	80124	80355	80324
5000	15	80156	80125	80356	80325
	30	80157	80126	80357	80326

Summation current transformers, series KSU / SUSK



www.mbs-stromwandler.de

Low voltage current transformers for industrial applications

Summation current transformers

KSU

Summation current transformer

Transformer width

127 mm

Transformer depth

57 mm

SUSK

Summation current transformer

Transformer width

156 mm

Transformer depth

65 mm

Guidance when ordering summation current transformers

Summation current transformers are suitable for the summation of several synchronized alternating currents with similar phases but with differing load phase shifts. It is also possible to have the summation of currents with varied nominal voltages of similar phase positions. These measurements cannot be used for tariff applications, as the existing voltage differences are recorded as errors.

With the counter connection of the main transformer to the summation current transformer, it is possible to receive secondary currents which are proportional to the differences of the primary input currents.

The built-in technical know-how enables the summation current transformers to add secondary currents of varying nominal transmissions from the main transformer.

The secondary connections of each main transformer are connected to the allocated primary inputs of the summation current transformers.

The number of windings of individual partially wound primary circuits of the summation current transformer is proportionally aligned to the ratio of the primary nominal current of the corresponding main transformer, and to the sum of the nominal currents of all the summation current transformers being connected to the main transformer.

For the visual display of the current, a measuring unit can be used with a measuring range similar to the secondary nominal current of the summation current transformers.

It is irrelevant for the main transformers with similar nominal transmission ratios, to which primary circuit of the summation current transformer the connection is made.

With main transformers of different nominal transmission ratios, care must be taken to adhere to the assigned connection to the terminals of the summation current transformers.

If the current flow in the main transformer is interrupted, the secondary circuit of the main transformer must neither be short-circuited nor be connected to the summation current transformer, or to the main transformer.

Summation current transformers with unallocated primary circuits must remain open for a later connection to an additional main transformer. The secondary output current of the summation current transformer is in this instance lower than the secondary nominal current of the summation current transformer by a quantity equal to the ratio of the primary nominal current of this "missing" main transformer and the sum of all the primary nominal currents of the main transformer.

The nominal secondary current of a main transformer must be equal to the nominal primary current of the input allocation of the summation current transformer.

Guidance when ordering summation current transformers

Please find below an example for the correct selection of measuring components for summation current transformers.

Example:

Actual situation:	3 transmission ratios	1000 / 5 VA
		800 / 5 VA
		<u>600 / 5 VA</u>
	Overall current	2400 / 5 VA

Burden:	– 1 current meter
	– 1 power recorder

Looking for:	1 summation current transformer and the VA power of an individual main transformer
--------------	--

Required active performance of the summation current transformer:

Current meter	1.5 VA
Performance recorder	7.0 VA
Measurement conductor loss	1.5 VA
consumption P ₀ summation ct	<u>4.0 VA</u>
Interim result	14.0 VA

The individual transformer must provide its VA share from this 14.0 VA corresponding to its ratio to the “total transmission”.

Consideration must also be given to the respective power loss between the main transformer and the summation transformer plus other possible losses.

1. Main transformer 1000 / 5A	$\frac{1000}{2400} \times 14.0 = 5.83 \text{ VA} + \text{additional possible losses}$
2. Main transformer 800 / 5A	$\frac{800}{2400} \times 14.0 = 4.67 \text{ VA} + \text{additional possible losses}$
3. Main transformer 600 / 5A	$\frac{600}{2400} \times 14.0 = 3.50 \text{ VA} + \text{additional possible losses}$

The VA values of the main transformers are to be rounded up to the corresponding VA values in our charts.

The ratio of the primary current of a main transformer to the sum of the primary currents of all main current transformers the ratio must not exceed 1:8.




Important indication to the power measuring

Too many rising deviation can prevent the measuring transformer acting as a current transformer from fulfilling its protective function with regard to the connected measuring units, as in normal operation its functions is well below its saturation limit, and in the event of over currents, the saturation limit is reached considerably later and takes the function almost as a protection current transformer.

If there is too much of a decrease, the measuring transformer, as a result of the continuous excess demands will reach the saturation limit too soon and indirectly function as a switch, rendering a measuring impossible.

KSU 2...3

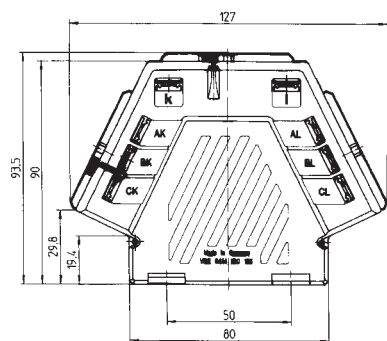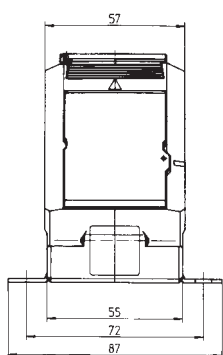Summation current transformer



Primary conductor	—
Round conductor	—
Transformer width	127 mm
Transformer depth	57 mm
Snap-on mounting	—
Sealed shutter	Art.-no. 59041
2 pieces primary	see page 205

Type	Primary current A	Burden VA	Secondary current		5A		1A	
			Accuracy class		Accuracy class		Accuracy class	
			1	0.5	1	0.5	1	0.5
			Art.-no.	Art.-no.	Art.-no.	Art.-no.	Art.-no.	Art.-no.
2	1+1	5	41114	41111	41314	41311		
		10	41115	41112	41315	41312		
		15	41116	41113	41316	41313		
		20	41117		41317			
		25	41118		41318			
		30	41119		41319			
3	1+1+1	5	41130	41127	41330	41327		
		10	41131	41128	41331	41328		
		15	41132	41129	41332	41329		
		30	41133		41333			
2	5+5	5	41014	41011	41214	41211		
		10	41015	41012	41215	41212		
		15	41016	41013	41216	41213		
		20	41017		41217			
		25	41018		41218			
		30	41019		41219			
3	5+5+5	5	41030	41027	41230	41227		
		10	41031	41028	41231	41228		
		15	41032	41029	41232	41229		
		30	41033		41233			

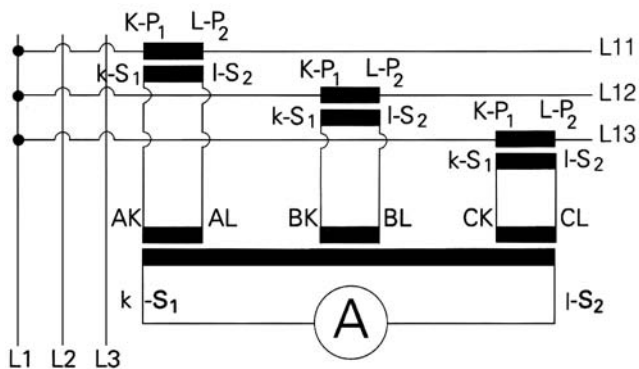
Connection example for different ratios:

AK-AL = 1000/5

BK-BL = 800/5




CK-CL = 600/5

Connection diagram



SUSK 3...8

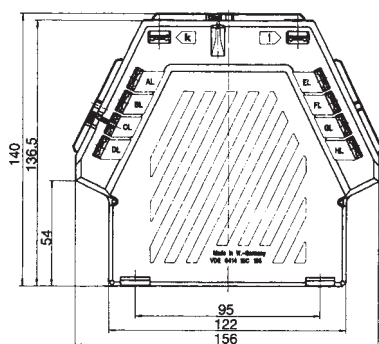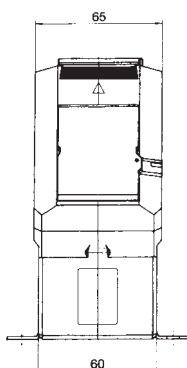
Summation current transformer



Secondary current			5A		1A	
Type	Primary current A	Burden VA	Accuracy class		Accuracy class	
			1	0.5	1	0.5
			Art.-no.	Art.-no.	Art.-no.	Art.-no.
3	5+5+5	5	40015	40011	40215	40211
		10	40016	40012	40216	40212
		15	40017	40014	40217	40214
		30	40018		40218	
4	5+5+5+5	5	40026	40023	40226	40223
		10	40027	40024	40227	40224
		15	40028	40025	40228	40225
		25	40029		40229	
		30	40030		40230	
5	5+5+5+5+5	5	40037	40034	40237	40234
		10	40038	40035	40238	40235
		15	40039	40036	40239	40236
		30	40040		40240	
6	5+5+5+5+5+5	5	40048	40045	40248	40245
		10	40049	40046	40249	40246
		15	40050	40047	40250	40247
		30	40051		40251	
7	5+5+5+5+5+5+5	5	40060	40057	40260	40257
		10	40061	40058	40261	40258
		15	40062	40059	40262	40259
		30	40063		40263	
8	5+5+5+5+5+5+5+5	5	40071	40068	40271	40268
		10	40072	40069	40272	40269
		15	40073	40070	40273	40270
		30	40074		40274	

Primary current 1 A, see page 116

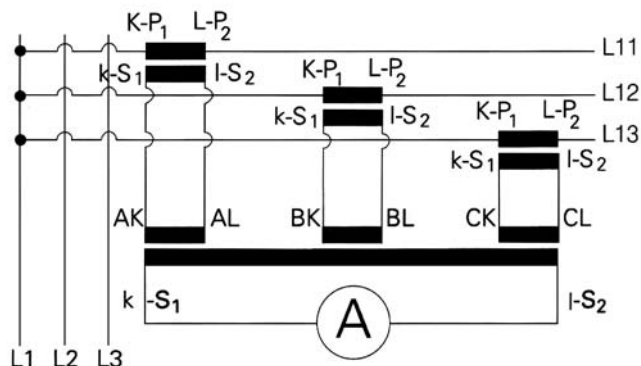Connection diagram






Primary conductor	—
Round conductor	—
Transformer width	156 mm
Transformer depth	65 mm
Snap-on mounting	—
Sealed shutter secondary no.	Art.-no. 59041 (primary) Art.-no. 59042 (secondary) see page 205
Current transformer for tariff applications	see page 195



SUSK 3...8

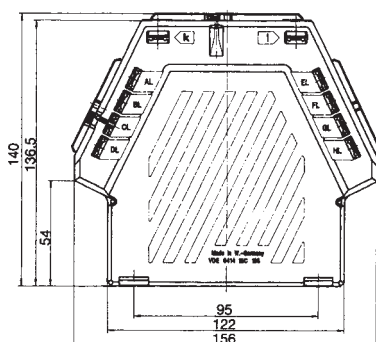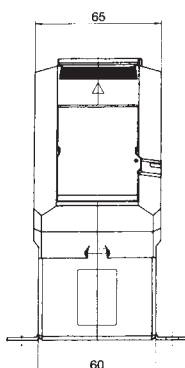Summation current transformer



Secondary current			5A		1A	
Typ	Primary current A	Burden VA	Accuracy class		Accuracy class	
			1	0.5	1	0.5
			Art.-no.	Art.-no.	Art.-no.	Art.-no.
3	1+1+1	5	40115	40111	40315	40311
		10	40116	40112	40316	40312
		15	40117	40114	40317	40314
		30	40118	40318		
4	1+1+1+1	5	40126	40123	40326	40323
		10	40127	40124	40327	40324
		15	40128	40125	40328	40325
		25	40129	40329		
		30	40130	40330		
5	1+1+1+1+1	5	40137	40134	40337	40334
		10	40138	40135	40338	40335
		15	40139	40136	40339	40336
		30	40140	40340		
6	1+1+1+1+1+1	5	40148	40145	40348	40345
		10	40149	40146	40349	40346
		15	40150	40147	40350	40347
		30	40151	40351		
7	1+1+1+1+1+1+1	5	40160	40157	40360	40357
		10	40161	40158	40361	40358
		15	40162	40159	40362	40359
		30	40163	40363		
8	1+1+1+1+1+1+1+1	5	40171	40168	40371	40368
		10	40172	40169	40372	40369
		15	40173	40170	40373	40370
		30	40174	40374		

Primary current 5 A, see page 115

Connection example for different ratios :

AK-AL	=	1000/5
BK-BL	=	800/5
CK-CL	=	600/5
DK-DL	=	400/5
EK-EL	=	400/5
FK-FL	=	300/5
GK-GL	=	300/5
HK-HL	=	300/5

Primary conductor	—
Round conductor	—
Transformer width	156 mm
Transformer depth	65 mm
Snap-on mounting	—
Sealed shutter	Art.-no. 59041 (primary)
secondary no.	Art.-no. 59042 (secondary)
	see page 205
Current transformer for tariff applications	see page 195

**Low voltage current transformers
for industrial applications
Special current transformers**

NH Current transformers for fuse rails

NH-Current transformers for fuse rails

Size 1, 2 and 3

Housing material: Technyl A20 V25 N025. 200 °C

Configuration: Current transformers for direct fitment in connection with low voltage high performance fuses with contact-knives and NH-fuse sets according to DIN 43620/1. NH current transformers are arranged with 2 or 4 tip jacks respectively and can be operated continuously in open state. Loss motion voltage / open circuit voltage with sec. 5 A approx. 3–6 V and with sec. 1 A approx. 13–25 V. The current transformers can also be supplied in dual change-over mode for secondary application.







NH 6.1


Current transformer for fuse rails

Secondary current		5A	1A
Primary current A	Burden VA	Accuracy class	Accuracy class
		3	3
		Art.-no.	Art.-no.
100	1.25	50011	50211
150	2.5	50012	50212
200	3.5	50013	50213
250	4	50014	50214
300	5	50015	50215



NH 6.1 2U

Secondary current		5A	1A
Primary current A	Burden VA	Accuracy class	Accuracy class
		3	3
		Art.-no.	Art.-no.
200-100	2.5-1.25	50111	50311
300-150	5-2.5	50112	50312

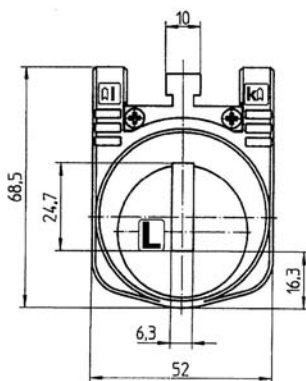


Primary conductor	24 x 6 mm
Round conductor	—
Transformer width	52 mm
Snap-on mounting	—
Sealed shutter	—



NH 6.2


Current transformer for fuse rails

Secondary current		5A	1A
Primary current A	Burden VA	Accuracy class	Accuracy class
		3	3
		Art.-no.	Art.-no.
100	1.25	50021	50221
150	2.5	50022	50222
200	3.5	50023	50223
250	4	50024	50224
300	5	50025	50225
400	5	50026	50226



NH 6.2 2U

Secondary current		5A	1A
Primary current A	Burden VA	Accuracy class	Accuracy class
		3	3
		Art.-no.	Art.-no.
200-100	2.5-1.25	50121	50321
300-150	5-2.5	50122	50322
400-200	5-2.5	50123	50323

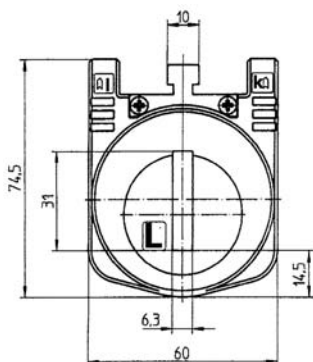



Primary conductor	30 x 6 mm
Round conductor	—
Transformer width	60 mm
Snap-on mounting	—
Sealed shutter	—



NH 6.3


Current transformer for fuse rails

Secondary current		5A	1A
Primary current A	Burden VA	Accuracy class	Accuracy class
		3	3
		Art.-no.	Art.-no.
150	2.5	50031	50231
200	3.5	50032	50232
250	4	50033	50233
300	5	50034	50234
400	5	50035	50235
500	5	50036	50236
600	10	50037	50237



NH 6.3 2U

Secondary current		5A	1A
Primary current A	Burden VA	Accuracy class	Accuracy class
		3	3
		Art.-no.	Art.-no.
300-150	5-2.5	50131	50331
400-200	5-2.5	50132	50332
600-300	10-5	50133	50333

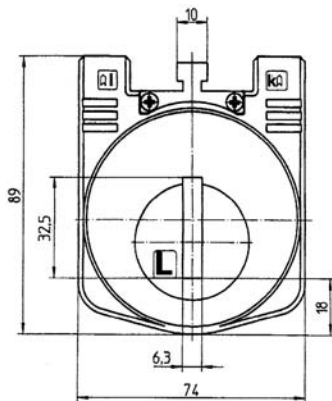

Primary conductor	32 x 6 mm
Round conductor	—
Transformer width	74 mm
Snap-on mounting	—
Sealed shutter	—



Low voltage current transformers for industrial applications


Protection current transformers

Protection tube current transformers

SASR 22.3

Round conductor
Transformer width

Ø 22.5 mm
61 mm




Protection plug-in current transformers

SASK 21.3

Primary conductor
Round conductor
Transformer width

20 x 10 mm
Ø 19.2 mm
61 mm




SASK 31.5

Primary conductor

Round conductor
Transformer width

30 x 10 mm
2 x 20 x 10 mm
Ø 28 mm
61 mm




SASK 31.6

Primary conductor

Round conductor
Transformer width

30 x 10 mm
20 x 13 mm
Ø 23 mm
95 mm



Protection current transformers – Technical concepts

Application: Current transformers are for the galvanic separation, proportional transformation of alternating currents of larger currents into smaller, direct measurable values. There are two categories subject to their application:

- measuring transformers
- protection transformers.

All current transformers manufactured by MBS are for low voltage applications with a max. phase to phase voltage of 0.72 kV.

Measuring transformer: Measuring transformers are used to measure current, power, power factor and energy consumption combined with an equivalent measurement unit. Using its magnetic circle, current transformers allow a high transmission accuracy in the nominal current range, whilst simultaneously protecting the connected appliances against over current. The magnetic saturation in the measuring core ensures protection in the event of an over current.

Protection current transformers: Protection current transformers are for the control of protecting relays which have the task to separate switched circuits in the event of over current. For a safe function of these relays a proportional transfer ratio of the transformer up to a multiple of the nominal current is necessary. The dimensioning of this transformer unit secures a proportional current transfer, up to a multiple of the nominal currents, determined by the protection class.

Technical standards: All MBS current transformers are produced in accordance with the technical requirements of DIN EN 60044/1 (edition 12/2003)

Technical characteristics: Application use: Indoors, without condensation

Protection current transformers:

- Ambient temperature: - 5 °C+ 40 °C.
- Housing material: Polycarbonate, self-extinguishing
- Housing form: halve-cup-shaped, ultrasonically welded
- Isolation class: E
- Thermal rated nominal continuous current: $1.2 \times I_N$
- Secondary rated currents: 5 A or 1 A
- Thermal rated short time current: $60 \times I_N$ (max. 100 kA)
- Max. excess temperature of the secondary winding: 75 °C
- Isolating test voltage: 3 kV U_{EFF} ; 50 Hz, 1 min

Safety instructions: The protection current transformer's physical characteristics has its many advantages and with all these built-in features it is very easy to attend to this transformer with their secondary circuits open. This can be very harmful to the operator or transformers as multiple kilovolt surges can occur. In order to prevent any mishaps an operation as described above is forbidden.

Ordering instructions: For the correct processing of your order, please make available the following specification:

Transformer type
Transmission ratio
Accuracy class
Rated burden

Accuracy classes of current transformers:





Class	current error (+/- %) by % I _N						phase displacement error (+/- minutes) by % I _N						total error by n x I _N
	1 %	5 %	20 %	50 %	100 %	120 %	1 %	5 %	20 %	50 %	100 %	120 %	
Measuring transformer													
0.2s	0.75	0.35	0.20	-	0.20	0.20	30	15	10	-	10	10	> 10
0.2	-	0.75	0.35	-	0.20	0.20	-	30	15	-	10	10	> 10
0.5s	1.50	0.75	0.50	-	0.50	0.50	90	45	30	-	30	30	> 10
0.5	-	1.50	0.75	-	0.50	0.50	-	90	45	-	30	30	> 10
1	-	3.00	1.50	-	1.00	1.00	-	180	90	-	60	60	> 10
3	-	-	3.00	3.00	3.00	3.00	-	-	-	120	120	120	> 10
Protection current transformer													
5P(n)	-	3.00	1.50	-	1.00	1.00	-	180	90	-	60	60	< 5
10P(n)	-	-	-	3.00	3.00	3.00	-	-	-	120	120	120	< 10
n... over current rated limiting factor													



SASR 22.3

Protection tube current transformer

Secondary current		5A		1A	
Primary current A	Burden VA	Protection class		Protection class	
		5P5 Art.-no.	10P5 Art.-no.	5P5 Art.-no.	10P5 Art.-no.
100	1				S04-1317B
125	1	S04-1506B	S04-1507B		
	1.5			S04-1516C	S04-1517C
150	1	S04-1606B	S04-1607B		
	1.5			S04-1616C	S04-1617C
200	1	S04-1706B	S04-1707B		
	1.5			S04-1716C	S04-1717C
250	1	S04-1806B	S04-1807B		
	1.5			S04-1816C	S04-1817C
300	1	S04-1906B	S04-1907B		
	1.5		S04-1907C	S04-1916C	S04-1917C

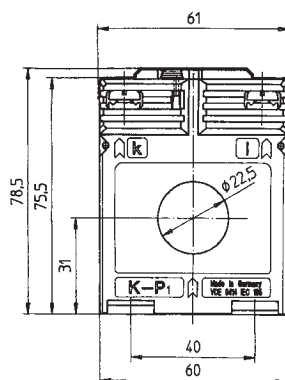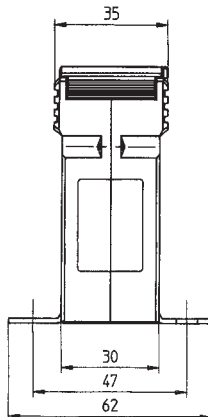

Snap-on mounting





Primary conductor	—
Round conductor	Ø 22.5 mm
Transformer width	61 mm
Snap-on mounting	Art.-no. 53011 see page 204
Sealed shutter	Art.-no. 59040 see page 205
Current transformer for industrial application	see page 35
Current transformer for tariff applications	see page 167



SASK 21.3

Protection plug-in current transformer

Secondary current		5A		1A	
Primary current A	Burden VA	Protection class		Protection class	
		5P5	10P5	5P5	10P5
		Art.-no.	Art.-no.	Art.-no.	Art.-no.
125	1	S03-1506B	S03-1507B	S03-1516C	S03-1517C
	1.5				
150	1	S03-1606B	S03-1607B	S03-1616C	S03-1617C
	1.5				
200	1	S03-1706B	S03-1707B	S03-1716C	S03-1717C
	1.5				

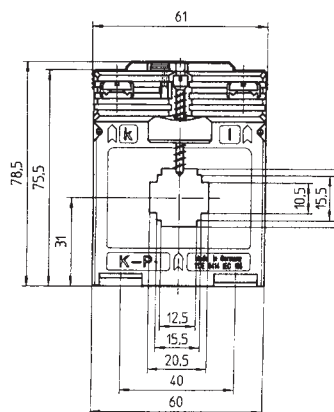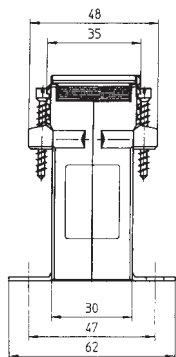




Snap-on mounting

Primary conductor	20 x 10 mm
Round conductor	Ø 19.2 mm
Transformer width	61 mm
Snap-on mounting	Art.-no. 55014 see page 204
Sealed shutter	Art.-no. 59040 see page 205
Current transformer for industrial applications	see page 43
Current transformer for tariff applications	see page 168




SASK 31.5

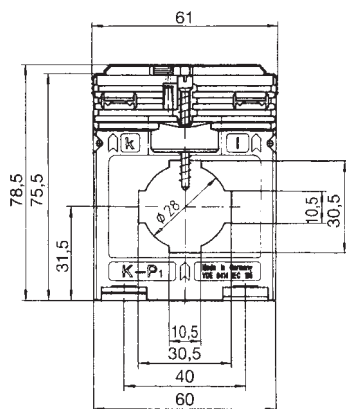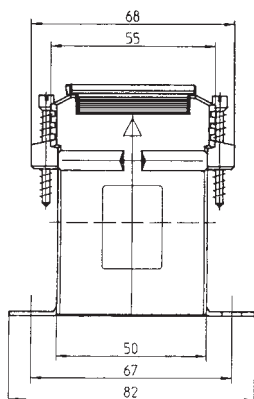Protection plug-in current transformer



Secondary current		5A		1A	
Primary current A	Burden VA	Protection class		Protection class	
		5P5 Art.-no.	10P5 Art.-no.	5P5 Art.-no.	10P5 Art.-no.
75	1			S17-1116B	S17-1117B
80	1			S17-1216B	S17-1217B
100	1	S17-1306B	S17-1307B		
	1.5			S17-1316C	S17-1317C
125	1	S17-1506B	S17-1507B		
	1.5		S17-1507C	S17-1516C	S17-1517C
150	1	S17-1606B	S17-1607B		
	1.5	S17-1606C	S17-1607C	S17-1616C	S17-1617C
200	1	S17-1706B	S17-1707B		
	1.5	S17-1706C	S17-1707C	S17-1716C	S17-1717C
	2.5			S17-1716D	S17-1717D
250	1.5	S17-1806C	S17-1807C	S17-1816C	S17-1817C
	2.5	S17-1806D	S17-1807D	S17-1816D	S17-1817D
300	1.5	S17-1906C	S17-1907C	S17-1916C	S17-1917C
	2.5	S17-1906D	S17-1907D	S17-1916D	S17-1917D
400	1.5	S17-2006C	S17-2007C	S17-2016C	S17-2017C
	2.5	S17-2006D	S17-2007D	S17-2016D	S17-2017D
500	1.5	S17-2106C	S17-2107C	S17-2116C	S17-2117C
	2.5	S17-2106D	S17-2107D	S17-2116D	S17-2117D
600	1.5	S17-2206C	S17-2207C	S17-2216C	S17-2217C
	2.5			S17-2216D	S17-2217C
750	1.5	S17-2306C	S17-2307C	S17-2316C	S17-2317C
	2.5			S17-2316D	S17-2317D
	5				S17-2317F





Snap-on mounting

Primary conductor	30 x 10 mm 2 x 20 x 10 mm
Round conductor	Ø 28 mm
Transformer width	61 mm
Snap-on mounting	Art.-no. 55011 see page 204
Sealed shutter	Art.-no. 59041 see page 205
Current transformer for industrial applications	see page 49
Current transformer for tariff applications	see page 171



SASK 31.6

Protection plug-in current transformer





Secondary current		5A			
Primary current A	Burden VA	Protection class			
		5P5 Art.-no.	10P5 Art.-no.	5P10 Art.-no.	10P10 Art.-no.
50	1.5	S19-0906C	S19-0907C		
	2.5	S19-0906D	S19-0907D		
60	1.5	S19-1006C	S19-1007C		S19-1009C
	2.5	S19-1006D	S19-1007D		
80	1.5	S19-1206C	S19-1207C	S19-1208C	S19-1209C
	2.5	S19-1206D	S19-1207D		
100	1.5	S19-1306C	S19-1307C	S19-1308C	S19-1309C
	2.5	S19-1306D	S19-1307D		S19-1309D
	5	S19-1306F	S19-1307F		
150	2.5	S19-1606D	S19-1607D	S19-1608D	S19-1609D
	5	S19-1606F	S19-1607F		
	7.5	S19-1606G	S19-1607G		
200	2.5	S19-1706D	S19-1707D	S19-1708D	S19-1709D
	5	S19-1706F	S19-1707F		S19-1709F
	7.5	S19-1706G	S19-1707G		
	10	S19-1706H	S19-1707H		
250	2.5	S19-1806D	S19-1807D	S19-1808D	S19-1809D
	5	S19-1806F	S19-1807F	S19-1808F	S19-1809F
	7.5	S19-1806G	S19-1807G		
	10	S19-1806H	S19-1807H		
300	2.5	S19-1906D	S19-1907D	S19-1908D	S19-1909D
	5	S19-1906F	S19-1907F	S19-1908F	S19-1909F
	10	S19-1906H	S19-1907H		
400	2.5	S19-2006D	S19-2007D	S19-2008D	S19-2009D
	5	S19-2006F	S19-2007F	S19-2008F	S19-2009F
	7.5	S19-2006G	S19-2007G		
	10	S19-2006H	S19-2007H		
	15	S19-2006J	S19-2007J		
500	2.5	S19-2106D	S19-2107D	S19-2108D	S19-2109D
	5	S19-2106F	S19-2107F	S19-2108F	S19-2109F
	7.5	S19-2106G	S19-2107G	S19-2108G	S19-2109G
	10	S19-2106H	S19-2107H		
	15	S19-2106J	S19-2107J		
600	2.5	S19-2206D	S19-2207D	S19-2208D	S19-2209D
	5	S19-2206F	S19-2207F	S19-2208F	S19-2209F
	7.5	S19-2206G	S19-2207G	S19-2208G	S19-2209G
	10	S19-2206H	S19-2207H		S19-2209H
	15	S19-2206J	S19-2207J		

Primary conductor	30 x 10 mm 20 x 13 mm
Round conductor	Ø 23 mm
Transformer width	95 mm
Snap-on mounting	—
Sealed shutter	Art.-no. 59044 see page 205
Current transformer for industrial applications	see page 51
Current transformer for tariff applications	see page 172



SASK 31.6

Protection plug-in current transformer



Secondary current		1A			
Primary current A	Burden VA	Protection class			
		5P5 Art.-no.	10P5 Art.-no.	5P10 Art.-no.	10P10 Art.-no.
50	1.5	S19-0916C	S19-0917C		
	2.5	S19-0916D	S19-0917D		
60	1.5	S19-1016C	S19-1017C	S19-1018C	S19-1019C
	2.5	S19-1016D	S19-1017D		
80	1.5	S19-1216C	S19-1217C	S19-1218C	S19-1219C
	2.5	S19-1216D	S19-1217D		
	5		S19-1217F		
100	2.5	S19-1316D	S19-1317D	S19-1318D	S19-1319D
	5	S19-1316F	S19-1317F		
150	2.5	S19-1616D	S19-1617D	S19-1618D	S19-1619D
	5	S19-1616F	S19-1617F		
	7.5	S19-1616G	S19-1617G		
200	2.5	S19-1716D	S19-1717D	S19-1718D	S19-1719D
	5	S19-1716F	S19-1717F	S19-1718F	S19-1719F
	7.5	S19-1716G	S19-1717G		
	10	S19-1716H	S19-1717H		
250	2.5	S19-1816D	S19-1817D	S19-1818D	S19-1819D
	5	S19-1816F	S19-1817F	S19-1818F	S19-1819F
	7.5	S19-1816G	S19-1817G		
	10	S19-1816H	S19-1817H		
300	2.5	S19-1916D	S19-1917D	S19-1918D	S19-1919D
	5	S19-1916F	S19-1917F	S19-1918F	S19-1919F
	10	S19-1916H	S19-1917H		
400	2.5	S19-2016D	S19-2017D	S19-2018D	S19-2019D
	5	S19-2016F	S19-2017F	S19-2018F	S19-2019F
	7.5	S19-2016G	S19-2017G	S19-2018G	S19-2019G
	10	S19-2016H	S19-2017H		
	15	S19-2016J	S19-2017J		
500	2.5	S19-2116D	S19-2117D	S19-2118D	S19-2119D
	5	S19-2116F	S19-2117F	S19-2118F	S19-2119F
	7.5	S19-2116G	S19-2117G	S19-2118G	S19-2119G
	10	S19-2116H	S19-2117H		S19-2119H
	15	S19-2116J	S19-2117J		
600	2.5	S19-2216D	S19-2217D	S19-2218D	S19-2219D
	5	S19-2216F	S19-2217F	S19-2218F	S19-2219F
	7.5	S19-2216G	S19-2217G	S19-2218G	S19-2219G
	10	S19-2216H	S19-2217H		S19-2219H
	15	S19-2216J	S19-2217J		


Primary conductor	30 x 10 mm 20 x 13 mm
Round conductor	Ø 23 mm
Transformer width	95 mm
Snap-on mounting	—
Sealed shutter	Art.-no. 59044 see page 205
Current transformer for industrial applications	see page 51
Current transformer for tariff applications	see page 172



Protection plug-in current transformers

SASK 421.4


Primary conductor
Round conductor
Transformer width



20 x 10 mm
Ø 20 mm
71 mm

SASK 41.4


Primary conductor
Round conductor
Transformer width



40 x 10 mm
2 x 30 x 5 mm
Ø 32 mm
71 mm

SASK 41.6


Primary conductor
Round conductor
Transformer width



40 x 12 mm
30 x 15 mm
Ø 32 mm
95 mm

SASK 41.10

Primary conductor
Round conductor
Transformer width






40 x 10 mm
Ø 32 mm
150 mm



SASK 421.4

Protection plug-in current transformer

Secondary current		5A		1A	
Primary current A	Burden VA	Protection class		Protection class	
		5P5	10P5	5P5	10P5
		Art.-no.	Art.-no.	Art.-no.	Art.-no.
200	1.5	S23-1706C	S23-1707C	S23-1716C	S23-1717C
	2.5	S23-1706D	S23-1707D	S23-1716D	S23-1717D
250	1.5	S23-1806C	S23-1807D	S23-1816C	S23-1817D
	2.5	S23-1806D	S23-1807C	S23-1816D	S23-1817C
300	1.5	S23-1906C	S23-1907C	S23-1916C	S23-1917C
	2.5	S23-1906D	S23-1907D	S23-1916D	S23-1917D
400	1.5	S23-2006C	S23-2007C	S23-2016C	S23-2017C
	2.5	S23-2006D	S23-2007D	S23-2016D	S23-2017D

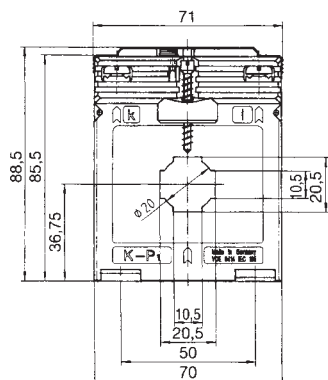

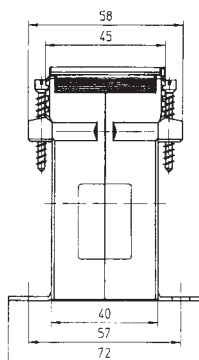


Primary conductor	20 x 10 mm
Round conductor	Ø 20 mm
Transformer width	71 mm
Snap-on mounting	—
Sealed shutter	Art.-no. 59041 see page 205
Current transformer for industrial applications	see page 55




SASK 41.4

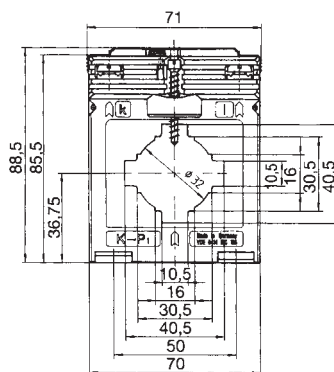Protection plug-in current transformer



Secondary current		5A		1A	
Primary current A	Burden VA	Protection class		Protection class	
		5P5	10P5	5P5	10P5
		Art.-no.	Art.-no.	Art.-no.	Art.-no.
120	1	S24-1406B	S24-1407B	S24-1416B	S24-1417B
125	1	S24-1506B	S24-1507B	S24-1516B	S24-1517B
150	1	S24-1606B	S24-1607B	S24-1616C	S24-1617C
	1.5		S24-1607C		
200	1.5	S24-1706C	S24-1707C	S24-1716C	S24-1717C
250	1.5	S24-1806C	S24-1807C	S24-1816C	S24-1817C
	2.5		S24-1807D		
300	1.5	S24-1906C	S24-1907C	S24-1916C	S24-1917C
	2.5	S24-1906D	S24-1907D	S24-1916D	S24-1917D
400	1.5	S24-2006C	S24-2007C	S24-2016C	S24-2017C
	2.5	S24-2006D	S24-2007D	S24-2016D	S24-2017D
500	1.5	S24-2106C	S24-2107C	S24-2116C	S24-2117C
	2.5			S24-2116D	S24-2117D
600	1.5	S24-2206C	S24-2207C	S24-2216C	S24-2217C
	2.5			S24-2216D	S24-2217D
750	1.5	S24-2306C	S24-2307C	S24-2316C	S24-2317C
	2.5				
			S24-2307D	S24-2316D	S24-2317D





Snap-on mounting

Primary conductor	40 x 10 mm
Round conductor	2 x 30 x 5 mm
Round conductor	Ø 32 mm
Transformer width	71 mm
Snap-on mounting	Art.-no. 55012 see page 204
Sealed shutter	Art.-no. 59041 see page 205
Current transformer for industrial applications	see page 56
Current transformer for tariff applications	see page 174



SASK 41.6

Protection plug-in current transformer





Secondary current		5A			
Primary current A	Burden VA	Protection class			
		5P5 Art.-no.	10P5 Art.-no.	5P10 Art.-no.	10P10 Art.-no.
100	1.5	S30-1306C	S30-1307C	S30-1308C	S30-1309C
	2.5	S30-1306D	S30-1307D		
150	2.5	S30-1606D	S30-1607D	S30-1608D	S30-1609D
	5	S30-1606F	S30-1607F		
200	2.5	S30-1706D	S30-1707D	S30-1708D	S30-1709D
	5	S30-1706F	S30-1707F		
	7.5	S30-1706G	S30-1707G		
	10		S30-1707H		
250	2.5	S30-1806D	S30-1807D	S30-1808D	S30-1809D
	5	S30-1806F	S30-1807F		S30-1809F
	7.5	S30-1806G	S30-1807G		
	10	S30-1806H	S30-1807H		
300	2.5	S30-1906D	S30-1907D	S30-1908D	S30-1909D
	5	S30-1906F	S30-1907F	S30-1908F	S30-1909F
	7.5	S30-1906G	S30-1907G		
	10	S30-1906H	S30-1907H		
400	2.5	S30-2006D	S30-2007D	S30-2008D	S30-2009D
	5	S30-2006F	S30-2007F	S30-2008F	S30-2009F
	7.5	S30-2006G	S30-2007G	S30-2008G	S30-2009G
	10	S30-2006H	S30-2007H		
500	2.5	S30-2106D	S30-2107D	S30-2108D	S30-2109D
	5	S30-2106F	S30-2107F	S30-2108F	S30-2109F
	7.5	S30-2106G	S30-2107G	S30-2108G	S30-2109G
	10	S30-2106H	S30-2107H	S30-2108H	S30-2109H
600	2.5	S30-2206D	S30-2207D	S30-2208D	S30-2209D
	5	S30-2206F	S30-2207F	S30-2208F	S30-2209F
	7.5	S30-2206G	S30-2207G	S30-2208G	S30-2209G
	10	S30-2206H	S30-2207H		

Primary conductor	40 x 12 mm 30 x 15 mm
Round conductor	Ø 32 mm
Transformer width	95 mm
Snap-on mounting	—
Sealed shutter	Art.-no. 59044 see page 205
Current transformer for industrial applications	see page 61
Current transformer for tariff applications	see page 176



SASK 41.6

Protection plug-in current transformer






Secondary current		1A			
Primary current A	Burden VA	Protection class			
		5P5 Art.-no.	10P5 Art.-no.	5P10 Art.-no.	10P10 Art.-no.
100	1.5	S30-1316C	S30-1317C	S30-1318C	S30-1319C
	2.5	S30-1316D	S30-1317D		
150	2.5	S30-1616D	S30-1617D	S30-1618D	S30-1619D
	5	S30-1616F	S30-1617F		
	7,5		S30-1617G		
200	2.5	S30-1716D	S30-1717D	S30-1718D	S30-1719D
	5	S30-1716F	S30-1717F		
	7.5	S30-1716G	S30-1717G		
	10		S30-1717H		
250	2.5	S30-1816D	S30-1817D	S30-1818D	S30-1819D
	5	S30-1816F	S30-1817F	S30-1818F	S30-1819F
	7.5	S30-1816G	S30-1817G		
	10	S30-1816H	S30-1817H		
300	2.5	S30-1916D	S30-1917D	S30-1918D	S30-1919D
	5	S30-1916F	S30-1917F	S30-1918F	S30-1919F
	7.5	S30-1916G	S30-1917G		
	10	S30-1916H	S30-1917H		
400	2.5	S30-2016D	S30-2017D	S30-2018D	S30-2019D
	5	S30-2016F	S30-2017F	S30-2018F	S30-2019F
	7.5	S30-2016G	S30-2017G	S30-2018G	S30-2019G
	10	S30-2016H	S30-2017H		
500	2.5	S30-2116D	S30-2117D	S30-2118D	S30-2119D
	5	S30-2116F	S30-2117F	S30-2118F	S30-2119F
	7.5	S30-2116G	S30-2117G	S30-2118G	S30-2119G
	10	S30-2116H	S30-2117H	S30-2118H	S30-2119H
600	2.5	S30-2216D	S30-2217D	S30-2218D	S30-2219D
	5	S30-2216F	S30-2217F	S30-2218F	S30-2219F
	7.5	S30-2216G	S30-2217G	S30-2218G	S30-2219G
	10	S30-2216H	S30-2217H		

Primary conductor	40 x 12 mm 30 x 15 mm
Round conductor	Ø 32 mm
Transformer width	95 mm
Snap-on mounting	—
Sealed shutter	Art.-no. 59044 see page 205
Current transformer for industrial applications	see page 61
Current transformer for tariff applications	see page 176



SASK 41.10

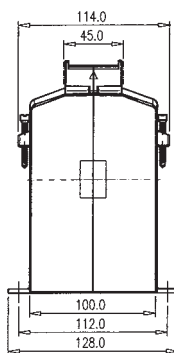Protection plug-in current transformer






Secondary current		5A			
Primary current A	Burden VA	Protection class			
		5P5 Art.-no.	10P5 Art.-no.	5P10 Art.-no.	10P10 Art.-no.
100	5	S31-1306F	S31-1307F		S31-1309F
	7.5	S31-1306G	S31-1307G		
	10	S31-1306H	S31-1307H		
	15		S31-1307J		
150	5	S31-1606F	S31-1607F		
	7.5	S31-1606G	S31-1607G		
	10	S31-1606H	S31-1607H		
	15	S31-1606J	S31-1607J		
200	5	S31-1706F	S31-1707F	S31-1708F	S31-1709F
	7.5	S31-1706G	S31-1707G	S31-1708G	S31-1709G
	10	S31-1706H	S31-1707H		S31-1709H
	15	S31-1706J	S31-1707J		
250	5	S31-1806F	S31-1807F	S31-1808F	S31-1809F
	7.5	S31-1806G	S31-1807G	S31-1808G	S31-1809G
	10	S31-1806H	S31-1807H	S31-1808H	S31-1809H
	15	S31-1806J	S31-1807J		S31-1809J
300	5	S31-1906F	S31-1907F	S31-1908F	S31-1909F
	7.5	S31-1906G	S31-1907G	S31-1908G	S31-1909G
	10	S31-1906H	S31-1907H	S31-1908H	S31-1909H
	15	S31-1906J	S31-1907J		S31-1909J
400	5	S31-2006F	S31-2007F	S31-2008F	S31-2009F
	7.5	S31-2006G	S31-2007G	S31-2008G	S31-2009G
	10	S31-2006H	S31-2007H	S31-2008H	S31-2009H
	15	S31-2006J	S31-2007J	S31-2008J	S31-2009J
500	5	S31-2106F	S31-2107F	S31-2108F	S31-2109F
	7.5	S31-2106G	S31-2107G	S31-2108G	S31-2109G
	10	S31-2106H	S31-2107H	S31-2108H	S31-2109H
	15	S31-2106J	S31-2107J	S31-2108J	S31-2109J
600	5	S31-2206F	S31-2207F	S31-2208F	S31-2209F
	7.5	S31-2206G	S31-2207G	S31-2208G	S31-2209G
	10	S31-2206H	S31-2207H	S31-2208H	S31-2209H
	15	S31-2206J	S31-2207J	S31-2208J	S31-2209J
750	5	S31-2306F	S31-2307F	S31-2308F	S31-2309F
	7.5	S31-2306G	S31-2307G	S31-2308G	S31-2309G
	10	S31-2306H	S31-2307H	S31-2308H	S31-2309H
	15	S31-2306J	S31-2307J	S31-2308J	S31-2309J
800	5	S31-2406F	S31-2407F	S31-2408F	S31-2409F
	7.5	S31-2406G	S31-2407G	S31-2408G	S31-2409G
	10	S31-2406H	S31-2407H	S31-2408H	S31-2409H
	15	S31-2406J	S31-2407J	S31-2408J	S31-2409J

Primary conductor	40 x 10 mm
Round conductor	Ø 32 mm
Transformer width	150 mm
Snap-on mounting	—
Sealed shutter	—



SASK 41.10

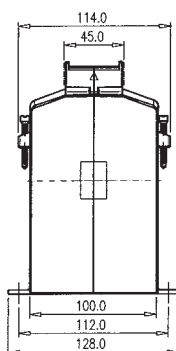Protection plug-in current transformer



Secondary current		1A			
Primary current A	Burden VA	Protection class			
		5P5 Art.-no.	10P5 Art.-no.	5P10 Art.-no.	10P10 Art.-no.
100	5	S31-1316F	S31-1317F		S31-1319F
	7.5	S31-1316G	S31-1317G		
	10	S31-1316H	S31-1317H		
	15		S31-1317J		
150	5	S31-1616F	S31-1617F		S31-1619F
	7.5	S31-1616G	S31-1617G		
	10	S31-1616H	S31-1617H		
	15	S31-1616J	S31-1617J		
200	5	S31-1716F	S31-1717F	S31-1718F	S31-1719F
	7.5	S31-1716G	S31-1717G	S31-1718G	S31-1719G
	10	S31-1716H	S31-1717H		S31-1719H
	15	S31-1716J	S31-1717J		
250	5	S31-1816F	S31-1817F	S31-1818F	S31-1819F
	7.5	S31-1816G	S31-1817G	S31-1818G	S31-1819G
	10	S31-1816H	S31-1817H	S31-1818H	S31-1819H
	15	S31-1816J	S31-1817J		S31-1819J
300	5	S31-1916F	S31-1917F	S31-1918F	S31-1919F
	7.5	S31-1916G	S31-1917G	S31-1918G	S31-1919G
	10	S31-1916H	S31-1917H	S31-1918H	S31-1919H
	15	S31-1916J	S31-1917J		S31-1919J
400	5	S31-2016F	S31-2017F	S31-2018F	S31-2019F
	7.5	S31-2016G	S31-2017G	S31-2018G	S31-2019G
	10	S31-2016H	S31-2017H	S31-2018H	S31-2019H
	15	S31-2016J	S31-2017J	S31-2018J	S31-2019J
500	5	S31-2116F	S31-2117F	S31-2118F	S31-2119F
	7.5	S31-2116G	S31-2117G	S31-2118G	S31-2119G
	10	S31-2116H	S31-2117H	S31-2118H	S31-2119H
	15	S31-2116J	S31-2117J	S31-2118J	S31-2119J
600	5	S31-2216F	S31-2217F	S31-2218F	S31-2219F
	7.5	S31-2216G	S31-2217G	S31-2218G	S31-2219G
	10	S31-2216H	S31-2217H	S31-2218H	S31-2219H
	15	S31-2216J	S31-2217J	S31-2218J	S31-2219J
750	5	S31-2316F	S31-2317F	S31-2318F	S31-2319F
	7.5	S31-2316G	S31-2317G	S31-2318G	S31-2319G
	10	S31-2316H	S31-2317H	S31-2318H	S31-2319H
	15	S31-2316J	S31-2317J	S31-2318J	S31-2319J
800	5	S31-2416F	S31-2417F	S31-2418F	S31-2419F
	7.5	S31-2416G	S31-2417G	S31-2418G	S31-2419G
	10	S31-2416H	S31-2417H	S31-2418H	S31-2419H
	15	S31-2416J	S31-2417J	S31-2418J	S31-2419J

Primary conductor	40 x 10 mm
Round conductor	Ø 32 mm
Transformer width	150 mm
Snap-on mounting	—
Sealed shutter	—



Protection plug-in current transformers

SASK 541.4

Primary conductor

40 x 10 mm


Round conductor

2 x 30 x 15 mm

Transformer width

Ø 32 mm

86 mm



SASK 51.4

Primary conductor

50 x 12 mm


Round conductor

2 x 40 x 10 mm

Transformer width

Ø 44 mm

86 mm



SASK 51.6

Primary conductor

50 x 12 mm


Round conductor

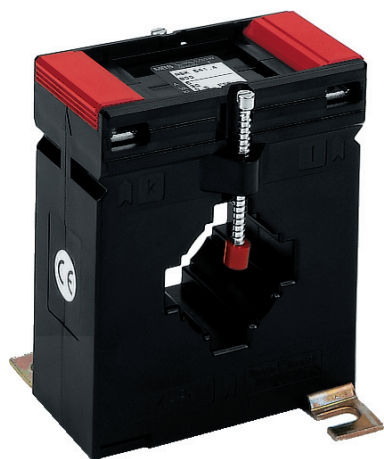
40 x 30 mm

Transformer width

Ø 40 mm


95 mm






SASK 541.4

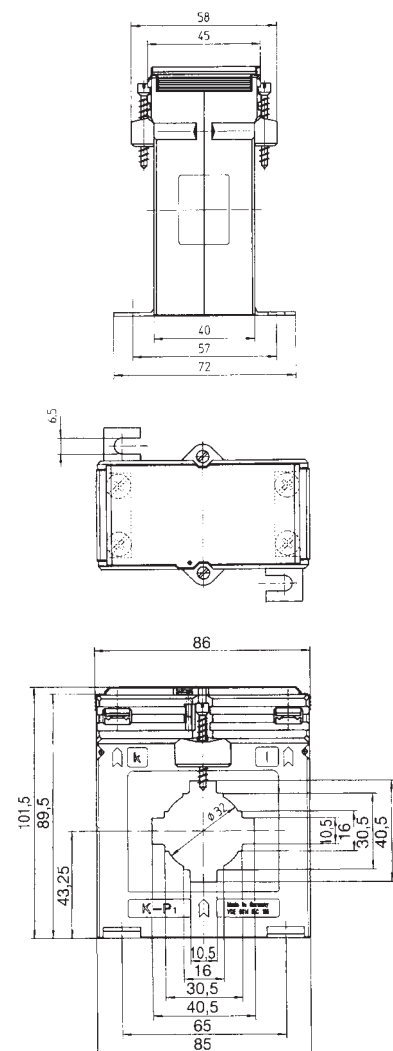Protection plug-in current transformer




Secondary current		5A			
Primary current A	Burden VA	Protection class			
		5P5 Art.-no.	10P5 Art.-no.	5P10 Art.-no.	10P10 Art.-no.
100	1	S33-1306B	S33-1307B		
	1.5	S33-1306C	S33-1307C		
125	1	S33-1506B	S33-1507B		
	1.5	S33-1506C	S33-1507C		
	2.5		S33-1507D		
150	1.5	S33-1606C	S33-1607C		
	2.5	S33-1606D	S33-1607D		
200	1.5	S33-1706C	S33-1707C		
	2.5	S33-1706D	S33-1707D		
250	1.5	S33-1806C	S33-1807C		S33-1809C
	2.5	S33-1806D	S33-1807D		
300	1.5	S33-1906C	S33-1907C	S33-1908C	S33-1909C
	2.5	S33-1906D	S33-1907D		
	5		S33-1907F		
400	1.5	S33-2006C	S33-2007C	S33-2008C	S33-2009C
	2.5	S33-2006D	S33-2007D		
	5	S33-2006F	S33-2007F		
500	1.5	S33-2106C	S33-2107C	S33-2108C	S33-2109C
	2.5	S33-2106D	S33-2107D	S33-2108D	S33-2109D
	5	S33-2106F	S33-2107F		
	7.5		S33-2107G		
600	1.5	S33-2206C	S33-2207C	S33-2208C	S33-2209C
	2.5	S33-2206D	S33-2207D	S33-2208D	S33-2209D
	5	S33-2206F	S33-2207F		
	7.5		S33-2207G		
750	2.5	S33-2306D	S33-2307D	S33-2308D	S33-2309D
	5	S33-2306F	S33-2307F		
	7.5	S33-2306G	S33-2307G		
1000	2.5	S33-2506D	S33-2507D	S33-2508D	S33-2509D
	5	S33-2506F	S33-2507F		
	7.5	S33-2506G	S33-2507G		
	10	S33-2506H	S33-2507H		

Primary conductor	40 x 10 mm 2 x 30 x 5 mm
Round conductor	Ø 32 mm
Transformer width	86 mm
Snap-on mounting	—
Sealed shutter	Art.-no. 59042 see page 205
Current transformer for industrial applications	see page 64
Current transformer for tariff applications	see page 177

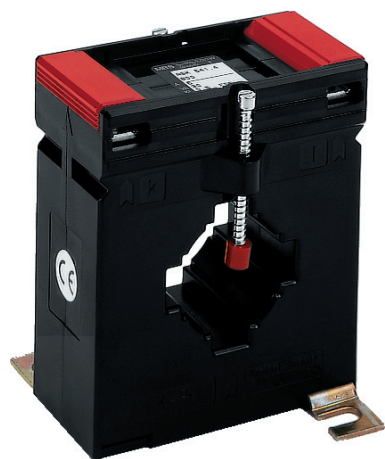


SASK 541.4

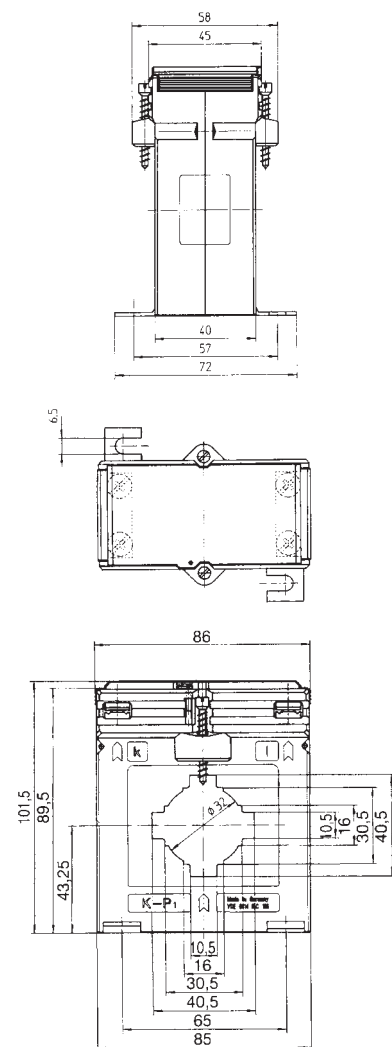Protection plug-in current transformer






Secondary current		1A			
Primary current A	Burden VA	Protection class			
		5P5 Art.-no.	10P5 Art.-no.	5P10 Art.-no.	10P10 Art.-no.
100	1	S33-1316B	S33-1317B		
	1,5	S33-1316C	S33-1317C		
125	1	S33-1516B	S33-1517B		
	1,5	S33-1516C	S33-1517C		
	2,5	S33-1516D	S33-1517D		
150	1,5	S33-1616C	S33-1617C		
	2,5	S33-1616D	S33-1617D		
200	1,5	S33-1716C	S33-1717C		
	2,5	S33-1716D	S33-1717D		
250	1,5	S33-1816C	S33-1817C	S33-1818C	S33-1819C
	2,5	S33-1816D	S33-1817D		
300	1,5	S33-1916C	S33-1917C	S33-1918C	S33-1919C
	2,5	S33-1916D	S33-1917D		
	5		S33-1917F		
400	1,5	S33-2016C	S33-2017C	S33-2018C	S33-2019C
	2,5	S33-2016D	S33-2017D		
	5	S33-2016F	S33-2017F		
500	1,5	S33-2116C	S33-2117C	S33-2118C	S33-2119C
	2,5	S33-2116D	S33-2117D	S33-2118D	S33-2119D
	5	S33-2116F	S33-2117F		
600	1,5	S33-2216C	S33-2217C	S33-2218C	S33-2219C
	2,5	S33-2216D	S33-2217D	S33-2218D	S33-2219D
	5	S33-2216F	S33-2217F		
	7,5		S33-2217G		
750	1,5	S33-2316C	S33-2317C	S33-2318C	S33-2319C
	2,5	S33-2316D	S33-2317D	S33-2318D	S33-2319D
	5	S33-2316F	S33-2317F		
	7,5	S33-2316G	S33-2317G		
1000	2,5	S33-2516D	S33-2517D	S33-2518D	S33-2519D
	5	S33-2516F	S33-2517F		S33-2519F
	7,5	S33-2516G	S33-2517G		
	10	S33-2516H	S33-2517H		

Primary conductor	40 x 10 mm 2 x 30 x 5 mm
Round conductor	Ø 32 mm
Transformer width	86 mm
Snap-on mounting	—
Sealed shutter	Art.-no. 59042 see page 205
Current transformer for industrial applications	see page 64
Current transformer for tariff applications	see page 177

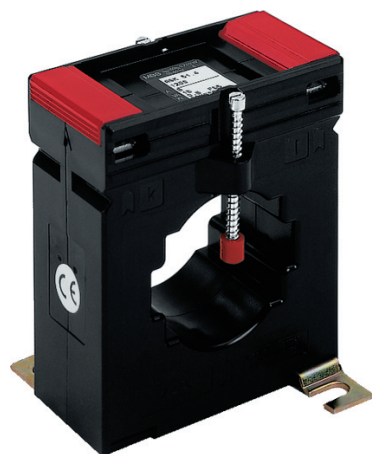

SASK 51.4

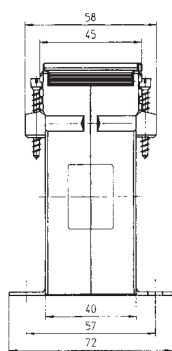Protection plug-in current transformer



Secondary current		5A		1A	
Primary current A	Burden VA	Protection class		Protection class	
		5P5 Art.-no.	10P5 Art.-no.	5P5 Art.-no.	10P5 Art.-no.
150	1			S34-1616B	S34-1617B
200	1	S34-1706B	S34-1707B	S34-1716B	S34-1717B
	1.5		S34-1707C	S34-1716C	S34-1717C
250	1.5	S34-1806C	S34-1807C	S34-1816C	S34-1817C
	2.5				S34-1817D
300	1.5	S34-1906C	S34-1907C	S34-1916C	S34-1917C
	2.5			S34-1916D	S34-1917D
400	1.5	S34-2006C	S34-2007C	S34-2016C	S34-2017C
	2.5		S34-2007D	S34-2016D	S34-2017D
500	1.5	S34-2106C	S34-2107C	S34-2116C	S34-2117C
	2.5		S34-2107D	S34-2116D	S34-2117D
600	1.5	S34-2206C	S34-2207C	S34-2216C	S34-2217C
	2.5		S34-2207D	S34-2216D	S34-2217D
750	1.5	S34-2306C	S34-2307C	S34-2316C	S34-2317C
	2.5	S34-2306D	S34-2307D	S34-2316D	S34-2317D
	5				S34-2317F
1000	1.5	S34-2506C	S34-2507C	S34-2516C	S34-2517C
	2.5	S34-2506D	S34-2507D	S34-2516D	S34-2517D
	5			S34-2516F	S34-2517F




Primary conductor	50 x 12 mm 2 x 40 x 10 mm
Round conductor	Ø 44 mm
Transformer width	86 mm
Snap-on mounting	—
Sealed shutter	Art.-no. 59042 see page 205
Current transformer for industrial applications	see page 65
Current transformer for tariff applications	see page 178





SASK 51.6

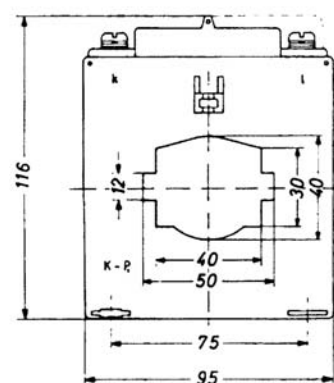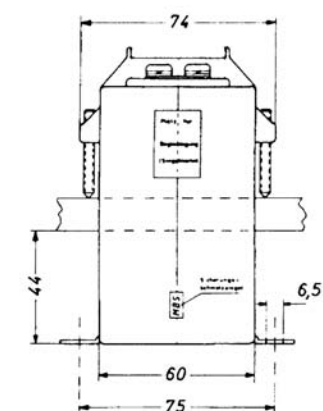Protection plug-in current transformer






Secondary current		5A			
Primary current A	Burden VA	Protection class			
		5P5 Art.-no.	10P5 Art.-no.	5P10 Art.-no.	10P10 Art.-no.
150	1.5	S37-1606C	S37-1607C	S37-1608C	S37-1609C
	2.5	S37-1606D	S37-1607D		
200	1.5	S37-1706C	S37-1707C	S37-1708C	S37-1709C
	2.5	S37-1706D	S37-1707D		
	5	S37-1706F	S37-1707F		
250	2.5	S37-1806D	S37-1807D	S37-1808D	S37-1809D
	5	S37-1806F	S37-1807F		
	7.5		S37-1807G		
300	2.5	S37-1906D	S37-1907D	S37-1908D	S37-1909D
	5	S37-1906F	S37-1907F		
	7.5	S37-1906G	S37-1907G		
400	2.5	S37-2006D	S37-2007D	S37-2008D	S37-2009D
	5	S37-2006F	S37-2007F		
	7.5	S37-2006G	S37-2007G		
500	2.5	S37-2106D	S37-2107D	S37-2108D	S37-2109D
	5	S37-2106F	S37-2107F		
	7.5	S37-2106G	S37-2107G		
	10	S37-2106H	S37-2107H		
600	2.5	S37-2206D	S37-2207D	S37-2208D	S37-2209D
	5	S37-2206F	S37-2207F		
	7.5	S37-2206G	S37-2207G		
	10	S37-2206H	S37-2207H		
750	2.5	S37-2306D	S37-2307D	S37-2308D	S37-2309D
	5	S37-2306F	S37-2307F	S37-2308F	S37-2309F
	7.5	S37-2306G	S37-2307G		
	10	S37-2306H	S37-2307H		
1000	2.5	S37-2506D	S37-2507D	S37-2508D	S37-2509D
	5	S37-2506F	S37-2507F	S37-2508F	S37-2509F
	7.5	S37-2506G	S37-2507G		
	10	S37-2506H	S37-2507H		

Primary conductor	50 x 12 mm 40 x 30 mm
Round conductor	Ø 40 mm
Transformer width	95 mm
Snap-on mounting	—
Sealed shutter	Art.-no. 59044 see page 205
Current transformer for industrial applications	see page 67
Current transformer for tariff applications	see page 179



SASK 51.6

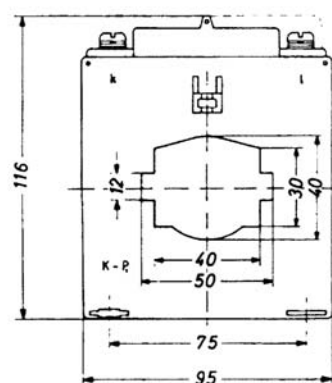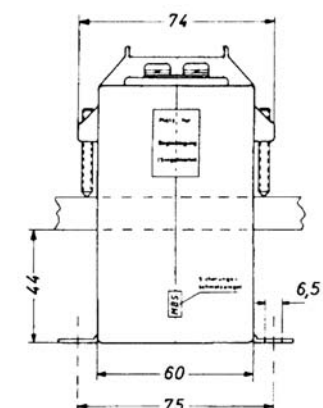Protection plug-in current transformer



Secondary current		1A			
Primary current A	Burden VA	Protection class			
		5P5 Art.-no.	10P5 Art.-no.	5P10 Art.-no.	10P10 Art.-no.
150	1.5	S37-1616C	S37-1617C	S37-1618C	S37-1619C
	2.5	S37-1616D	S37-1617D		
200	1.5	S37-1716C	S37-1717C	S37-1718C	S37-1719C
	2.5	S37-1716D	S37-1717D	S37-1718D	S37-1719D
	5	S37-1716F	S37-1717F		
250	2.5	S37-1816D	S37-1817D	S37-1818D	S37-1819D
	5	S37-1816F	S37-1817F		
	7.5		S37-1817G		
300	2.5	S37-1916D	S37-1917D	S37-1918D	S37-1919D
	5	S37-1916F	S37-1917F		
	7.5		S37-1917G		
400	2.5	S37-2016D	S37-2017D	S37-2018D	S37-2019D
	5	S37-2016F	S37-2017F		
	7.5	S37-2016G	S37-2017G		
500	2.5	S37-2116D	S37-2117D	S37-2118D	S37-2119D
	5	S37-2116F	S37-2117F		S37-2119F
	7.5	S37-2116G	S37-2117G		
	10	S37-2116H	S37-2117H		
600	2.5	S37-2216D	S37-2217D	S37-2218D	S37-2219D
	5	S37-2216F	S37-2217F	S37-2218F	S37-2219F
	7.5	S37-2216G	S37-2217G		
	10	S37-2216H	S37-2217H		
750	2.5	S37-2316D	S37-2317D	S37-2318D	S37-2319D
	5	S37-2316F	S37-2317F	S37-2318F	S37-2319F
	7.5	S37-2316G	S37-2317G		
	10	S37-2316H	S37-2317H		
1000	2.5	S37-2516D	S37-2517D	S37-2518D	S37-2519D
	5	S37-2516F	S37-2517F	S37-2518F	S37-2519F
	7.5	S37-2516G	S37-2517G		
	10	S37-2516H	S37-2517H		

Primary conductor	50 x 12 mm 40 x 30 mm
Round conductor	Ø 40 mm
Transformer width	95 mm
Snap-on mounting	—
Sealed shutter	Art.-no. 59044 see page 205
Current transformer for industrial applications	see page 67
Current transformer for tariff applications	see page 179




Protection plug-in current transformers

SASK 61.4

Primary conductor

Round conductor
Transformer width




60 x 10 mm
2 x 50 x 10 mm
Ø 44 mm
96 mm

SASK 61.10

Primary conductor


Transformer width



60 x 10 mm
50 x 30 mm
150 mm

SASK 63.6


Primary conductor
Round conductor
Transformer width



60 x 30 mm
Ø 30 mm
88 mm

SASK 105.6

Primary conductor
Round conductor
Transformer width






100 x 55 mm
Ø 55 mm
129 mm



SASK 61.4

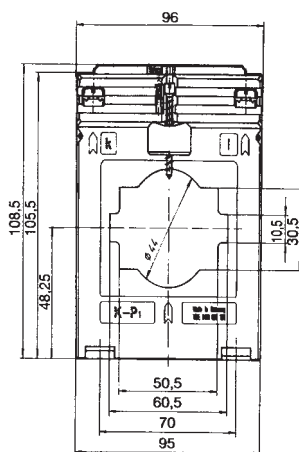Protection plug-in current transformer



Secondary current		5A		1A	
Primary current A	Burden VA	Protection class		Protection class	
		5P5	10P5	5P5	10P5
		Art.-no.	Art.-no.	Art.-no.	Art.-no.
200	1	S41-1706B	S41-1707B	S41-1716B	S41-1717B
	1.5	S41-1706C	S41-1707C	S41-1716C	S41-1717C
250	1	S41-1806B	S41-1807B	S41-1816B	S41-1817B
	1.5	S41-1806C	S41-1807C	S41-1816C	S41-1817C
300	1.5	S41-1906C	S41-1907C	S41-1916C	S41-1917C
	2.5		S41-1907D	S41-1916D	S41-1917D
400	1.5	S41-2006C	S41-2007C	S41-2016C	S41-2017C
	2.5	S41-2006D	S41-2007D	S41-2016D	S41-2017D
500	1.5	S41-2106C	S41-2107C	S41-2116C	S41-2117C
	2.5	S41-2106D	S41-2107D	S41-2116D	S41-2117D
600	1.5	S41-2206C	S41-2207C	S41-2216C	S41-2217C
	2.5	S41-2206D	S41-2207D	S41-2216D	S41-2217D
	5			S41-2216F	S41-2217F
750	1.5	S41-2306C	S41-2307C	S41-2316C	S41-2317C
	2.5	S41-2306D	S41-2307D	S41-2316D	S41-2317D
	5	S41-2307F	S41-2307F	S41-2316F	S41-2317F
1000	1.5	S41-2506C	S41-2507C	S41-2516C	S41-2517C
	2.5	S41-2506D	S41-2507D	S41-2516D	S41-2517D
	5	S41-2506F	S41-2507F	S41-2516F	S41-2517F
1200	1.5	S41-2606C	S41-2607C	S41-2616C	S41-2617C
	2.5	S41-2606D	S41-2607D	S41-2616D	S41-2617D
	5	S41-2606F	S41-2607F	S41-2616F	S41-2617F
1250	1.5	S41-2706C	S41-2707C	S41-2716C	S41-2717C
	2.5	S41-2706D	S41-2707D	S41-2716D	S41-2717D
	5	S41-2706F	S41-2707F	S41-2716F	S41-2717F




Primary conductor	63 x 10 mm 2 x 50 x 10 mm
Round conductor	Ø 44 mm
Transformer width	96 mm
Snap-on mounting	—
Sealed shutter	Art.-no. 59042 see page 205
Current transformer for industrial applications	see page 70
Current transformer for tariff applications	see page 182





SASK 61.10

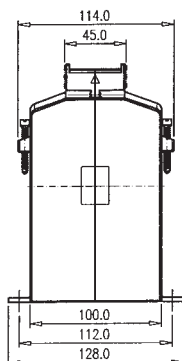Protection plug-in current transformer






Secondary current		5A			
Primary current A	Burden VA	Protection class			
		5P5 Art.-no.	10P5 Art.-no.	5P10 Art.-no.	10P10 Art.-no.
250	5	S50-1806F	S50-1807F	S50-1808F	S50-1809F
	7.5	S50-1806G	S50-1807G		S50-1809G
	10	S50-1806H	S50-1807H		
300	5	S50-1906F	S50-1907F	S50-1908F	S50-1909F
	7.5	S50-1906G	S50-1907G	S50-1908G	S50-1909G
	10	S50-1906H	S50-1907H		S50-1909H
	15	S50-1906J	S50-1907J		
400	5	S50-2006F	S50-2007F	S50-2008F	S50-2009F
	7.5	S50-2006G	S50-2007G	S50-2008G	S50-2009G
	10	S50-2006H	S50-2007H	S50-2008H	S50-2009H
	15	S50-2006J	S50-2007J	S50-2008J	S50-2009J
500	5	S50-2106F	S50-2107F	S50-2108F	S50-2109F
	7.5	S50-2106G	S50-2107G	S50-2108G	S50-2109G
	10	S50-2106H	S50-2107H	S50-2108H	S50-2109H
	15	S50-2106J	S50-2107J	S50-2108J	S50-2109J
600	5	S50-2206F	S50-2207F	S50-2208F	S50-2209F
	7.5	S50-2206G	S50-2207G	S50-2208G	S50-2209G
	10	S50-2206H	S50-2207H	S50-2208H	S50-2209H
	15	S50-2206J	S50-2207J	S50-2208J	S50-2209J
750	5	S50-2306F	S50-2307F	S50-2308F	S50-2309F
	7.5	S50-2306G	S50-2307G	S50-2308G	S50-2309G
	10	S50-2306H	S50-2307H	S50-2308H	S50-2309H
	15	S50-2306J	S50-2307J	S50-2308J	S50-2309J
1000	5	S50-2506F	S50-2507F	S50-2508F	S50-2509F
	7.5	S50-2506G	S50-2507G	S50-2508G	S50-2509G
	10	S50-2506H	S50-2507H	S50-2508H	S50-2509H
	15	S50-2506J	S50-2507J	S50-2508J	S50-2509J
1200	5	S50-2606F	S50-2607F	S50-2608F	S50-2609F
	7.5	S50-2606G	S50-2607G	S50-2608G	S50-2609G
	10	S50-2606H	S50-2607H	S50-2608H	S50-2609H
	15	S50-2606J	S50-2607J	S50-2608J	S50-2609J
1250	5	S50-2706F	S50-2707F	S50-2708F	S50-2709F
	7.5	S50-2706G	S50-2707G	S50-2708G	S50-2709G
	10	S50-2706H	S50-2707H	S50-2708H	S50-2709H
	15	S50-2706J	S50-2707J	S50-2708J	S50-2709J
1500	5	S50-2806F	S50-2807F	S50-2808F	S50-2809F
	7.5	S50-2806G	S50-2807G	S50-2808G	S50-2809G
	10	S50-2806H	S50-2807H	S50-2808H	S50-2809H
	15	S50-2806J	S50-2807J	S50-2808J	S50-2809J
2000	5	S50-3006F	S50-3007F	S50-3008F	S50-3009F
	7.5	S50-3006G	S50-3007G	S50-3008G	S50-3009G
	10	S50-3006H	S50-3007H	S50-3008H	S50-3009H
	15	S50-3006J	S50-3007J	S50-3008J	S50-3009J

Primary conductor	60 x 10 mm 50 x 30 mm
Round conductor	—
Transformer width	150 mm
Snap-on mounting	—
Sealed shutter	—



SASK 61.10

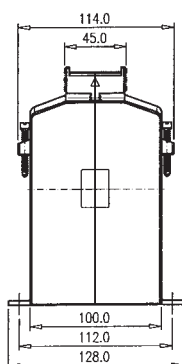Protection plug-in current transformer






Secondary current		1A			
Primary current A	Burden VA	Protection class			
		5P5 Art.-no.	10P5 Art.-no.	5P10 Art.-no.	10P10 Art.-no.
250	5	S50-1816F	S50-1817F	S50-1818F	S50-1819F
	7.5	S50-1816G	S50-1817G		S50-1819G
	10	S50-1816H	S50-1817H		
300	5	S50-1916F	S50-1917F	S50-1918F	S50-1919F
	7.5	S50-1916G	S50-1917G	S50-1918G	S50-1919G
	10	S50-1916H	S50-1917H		S50-1919H
	15	S50-1916J	S50-1917J		
400	5	S50-2016F	S50-2017F	S50-2018F	S50-2019F
	7.5	S50-2016G	S50-2017G	S50-2018G	S50-2019G
	10	S50-2016H	S50-2017H	S50-2018H	S50-2019H
	15	S50-2016J	S50-2017J		S50-2019J
500	5	S50-2116F	S50-2117F	S50-2118F	S50-2119F
	7.5	S50-2116G	S50-2117G	S50-2118G	S50-2119G
	10	S50-2116H	S50-2117H	S50-2118H	S50-2119H
	15	S50-2116J	S50-2117J	S50-2118J	S50-2119J
600	5	S50-2216F	S50-2217F	S50-2218F	S50-2219F
	7.5	S50-2216G	S50-2217G	S50-2218G	S50-2219G
	10	S50-2216H	S50-2217H	S50-2218H	S50-2219H
	15	S50-2216J	S50-2217J	S50-2218J	S50-2219J
750	5	S50-2316F	S50-2317F	S50-2318F	S50-2319F
	7.5	S50-2316G	S50-2317G	S50-2318G	S50-2319G
	10	S50-2316H	S50-2317H	S50-2318H	S50-2319H
	15	S50-2316J	S50-2317J	S50-2318J	S50-2319J
1000	5	S50-2516F	S50-2517F	S50-2518F	S50-2519F
	7.5	S50-2516G	S50-2517G	S50-2518G	S50-2519G
	10	S50-2516H	S50-2517H	S50-2518H	S50-2519H
	15	S50-2516J	S50-2517J	S50-2518J	S50-2519J
1200	5	S50-2616F	S50-2617F	S50-2618F	S50-2619F
	7.5	S50-2616G	S50-2617G	S50-2618G	S50-2619G
	10	S50-2616H	S50-2617H	S50-2618H	S50-2619H
	15	S50-2616J	S50-2617J	S50-2618J	S50-2619J
1250	5	S50-2716F	S50-2717F	S50-2718F	S50-2719F
	7.5	S50-2716G	S50-2717G	S50-2718G	S50-2719G
	10	S50-2716H	S50-2717H	S50-2718H	S50-2719H
	15	S50-2716J	S50-2717J	S50-2718J	S50-2719J
1500	5	S50-2816F	S50-2817F	S50-2818F	S50-2819F
	7.5	S50-2816G	S50-2817G	S50-2818G	S50-2819G
	10	S50-2816H	S50-2817H	S50-2818H	S50-2819H
	15	S50-2816J	S50-2817J	S50-2818J	S50-2819J
2000	5	S50-3016F	S50-3017F	S50-3018F	S50-3019F
	7.5	S50-3016G	S50-3017G	S50-3018G	S50-3019G
	10	S50-3016H	S50-3017H	S50-3018H	S50-3019H
	15	S50-3016J	S50-3017J	S50-3018J	S50-3019J

Primary conductor	60 x 10 mm 50 x 30 mm
Round conductor	—
Transformer width	150 mm
Snap-on mounting	—
Sealed shutter	—



SASK 63.6

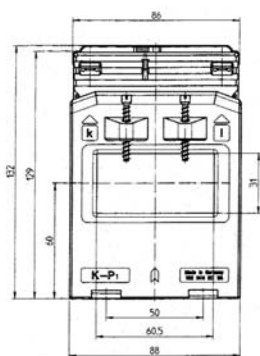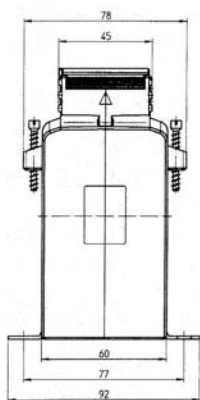Protection plug-in current transformer






Secondary current		5A		1A	
Primary current A	Burden VA	Protection class		Protection class	
		5P5	10P5	5P5	10P5
		Art.-no.	Art.-no.	Art.-no.	Art.-no.
200	1.5	S46-1706C	S17-1707C	S46-1716C	S46-1717C
	2.5	S46-1706D	S46-1707D	S46-1716D	S46-1717D
250	1.5	S46-1806C	S46-1807C	S46-1816C	S46-1817C
	2.5	S46-1806D	S46-1807D	S46-1816D	S46-1817D
300	1.5	S46-1906C	S46-1907C	S46-1916C	S46-1917C
	2.5	S46-1906D	S46-1907D	S46-1916D	S46-1917D
400	2.5	S46-2006D	S46-2007D	S46-2016D	S46-2017D
	5		S46-2007F	S46-2016F	S46-2017F
500	2.5	S46-2106D	S46-2107D	S46-2116D	S46-2117D
	5	S46-2106F	S46-2107F	S46-2116F	S46-2117F
600	2.5	S46-2206D	S46-2207D	S46-2216D	S46-2217D
	5	S46-2206F	S46-2207F	S46-2216F	S46-2217F
750	2.5	S46-2306D	S46-2307D	S46-2316D	S46-2317D
	5	S46-2306F	S46-2307F	S46-2316F	S46-2317F
1000	2.5	S46-2506D	S46-2507D	S46-2516D	S46-2517D
	5	S46-2506F	S46-2507F	S46-2516F	S46-2517F

Primary conductor	60 x 30 mm
Round conductor	Ø 30 mm
Transformer width	88 mm
Snap-on mounting	—
Sealed shutter	Art.-no. 59042 see page 205
Current transformer for industrial applications	see page 74
Current transformer for tariff applications	see page 184



SASK 105.6

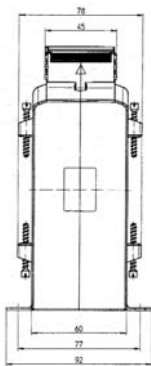
Protection plug-in current transformer



Secondary current		5A		1A	
Primary current	Burden	Protection class		Protection class	
		5P5	10P5	5P5	10P5
A	VA	Art.-no.	Art.-no.	Art.-no.	Art.-no.
600	2.5	S56-2206C	S56-2207C	S56-2216C	S56-2217C
	5	S56-2206F	S56-2207F	S56-2216F	S56-2217F
750	2.5	S56-2306C	S56-2307C	S56-2316C	S56-2317C
	5	S56-2306F	S56-2307F	S56-2316F	S56-2317F
	10		S56-2307H	S56-2316H	S56-2317H
1000	5	S56-2506F	S56-2507F	S56-2516F	S56-2517F
	10	S56-2506H	S56-2507H	S56-2516H	S56-2517H
	15				S56-2517J
1200	5	S56-2606F	S56-2607F	S56-2616F	S56-2617F
	10	S56-2606H	S26-2607H	S56-2616H	S56-2617H
	15		S26-2607J	S56-2616J	S56-2617J
1250	5	S56-2706F	S56-2707F	S56-2716F	S56-2717F
	10	S56-2706H	S56-2707H	S56-2716H	S56-2717H
	15	S56-2706J	S56-2707J	S56-2716J	S56-2717J
1500	5	S56-2806F	S56-2807F	S56-2816F	S56-2817F
	10	S56-2806H	S56-2807H	S56-2816H	S56-2817H
	15	S56-2806J	S56-2807J	S56-2816J	S56-2817J
1600	10	S56-2906H	S56-2907H	S56-2916H	S56-2917H
	15	S56-2906J	S56-2907J	S56-2916J	S59-2917J

Primary conductor	100 x 55 mm
Round conductor	Ø 55 mm
Transformer width	129 mm
Snap-on mounting	—
Sealed shutter	Art.-no. 59042 see page 205
Current transformer for industrial applications	see page 86
Current transformer for tariff applications	see page 188

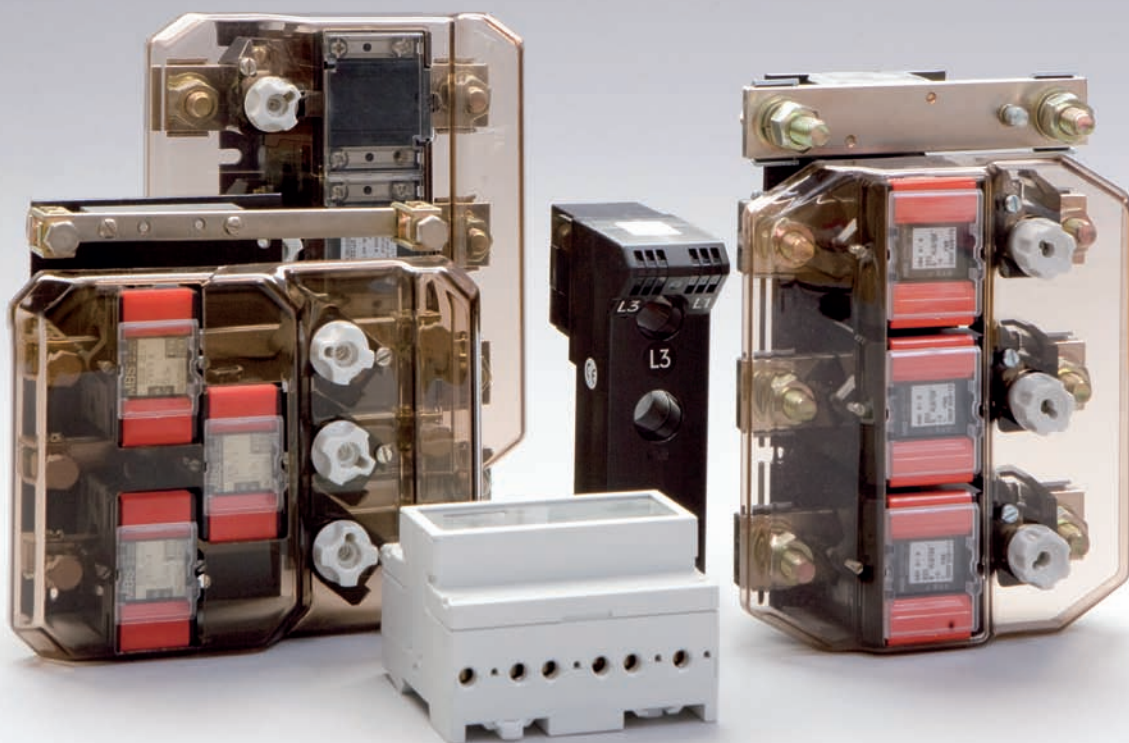Three-phase current transformer sets



www.mbs-stromwandler.de

Three-phase current transformer sets

ASRD 14

Primary conductor
Transformer width

3 x 13.5 mm
105 mm

for standard rail mounting

ASRD 210.3

Primary conductor
Transformer width

3 x 21.5 mm
49.6 mm

Slim-Line-rail

ASK(D) 21.3

with Plexiglas caps

ASK(D) 31.5

with Plexiglas caps

ASK(D) 31.5 2U




WSKD 31.8

with Plexiglas caps

ASKD 31.8

ASRD 14

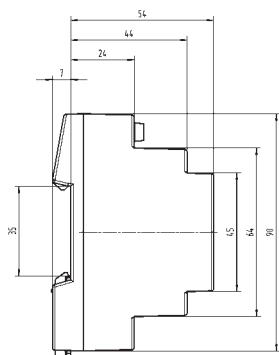Three-phase current transformer set






Secondary current		5A		1A	
Primary current A	Burden VA	Accuracy class		Accuracy class	
		1	0.5	1	0.5
		Art.-no.	Art.-no.	Art.-no.	Art.-no.
3 x 50	1	96030		96230	
3 x 60	1.25	96032		96232	
3 x 75	1.5	96034		96234	
3 x 80	1.5	96036		96236	
3 x 100	2.5	96038	96012	96238	96212
3 x 125	2.5	96039	96014	96241	96214
	3.75	96041			
3 x 150	2.5	96040	96017	96244	96217
	3.75	96044			

Primary conductor	—
Round conductor	3 x Ø 13.5 mm
Transformer width	105 mm
Snap-on mounting	integrated
Sealed shutter	—

ASRD 210.3

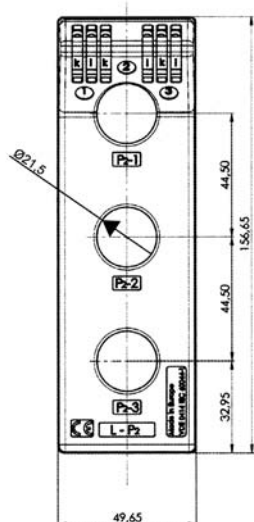Three-phase current transformer set



Secondary current		5A		1A	
Primary current A	Burden VA	Accuracy class		Accuracy class	
		1	0.5	1	0.5
		Art.-no.	Art.-no.	Art.-no.	Art.-no.
50	1	27700		27800	
60	1	27701		27801	
	1.25	27702		27802	
75	1.25	27703		27803	
	1.5	27704		27804	
80	1.25	27705		27805	
	1.5	27706		27806	
100	1.5	27707	27726	27807	
	2.5	27708	27724	27808	27824
125	1.5	27709		27809	
	2.5	27710		27810	
	3.75	27711		27811	
150	1.5	27712		27812	
	2.5	27713	27725	27813	27825
	3.75	27714		27814	
160	5	27750			
200	1.5	27715		27815	
	2.5	27716		27816	
	5	27717		27817	
250	2.5	27718		27818	
	5	27719		27819	
	7.5	27720		27820	
300	2.5	27721		27821	
	5	27722		27822	
	7.5	27723		27823	

Primary conductor	—
Round conductor	3 x Ø 21.5 mm
Transformer width	49.6 mm
Snap-on mounting	—
Sealed shutter	—

Three-phase current transformer set

ASK(D) 21.3

with Plexiglas caps

Configuration:

The measuring transformer set consists of 3 individual current transformers which are mounted on an aluminium base plate together with the primary conductors L1, L2, L3 and neutral conductor.

The current transformer set can be supplied with or without fuses. The voltage supply is optional and can be tapped either from the 10 A-NEOZED fuse or from the individual primary conductors.

Transparent, sealable covers protect the secondary terminals of the current transformers against external tampering. All voltage carrying parts of the assembled current transformer set are made shock-proof with isolating covers which are included in the deliveries.


Flexible copper wire with a nominal cross section of 16 mm² up to 70 mm² can be connected to the primary connection terminals.

The configuration of this current transformer set conforms to the technical requirements and guidance:

DIN EN 60044/1

DIN 42600

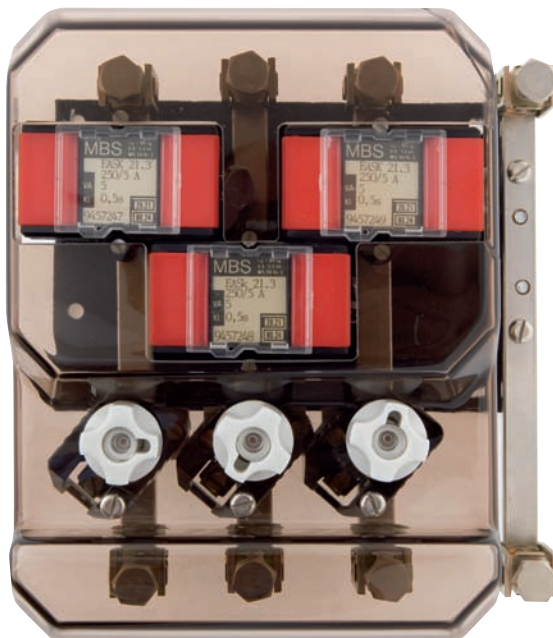VBG 4





ASK(D) 21.3

Three-phase current transformer set



Secondary current		5A		1A	
Primary current A	Burden VA	Accuracy class		Accuracy class	
		1	0.5	1	0.5
		Art.-no.	Art.-no.	Art.-no.	Art.-no.
3 x 100	1.5	56027	56011	56227	56211
	2.5	56028	56012	56228	56212
3 x 150	1.5	56029	56013	56229	56213
	2.5	56030	56014	56230	56214
	5	56043	56015	56243	56215
3 x 200	1.5	56031	56016	56231	56216
	2.5	56032	56017	56232	56217
	5	56033	56018	56233	56218

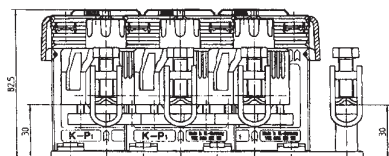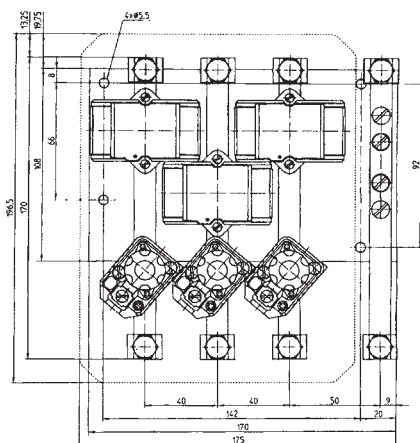

Three-phase current transformer set

ASK(D) 31.5

ASK(D) 31.5 2U

with Plexiglas caps

Configuration:

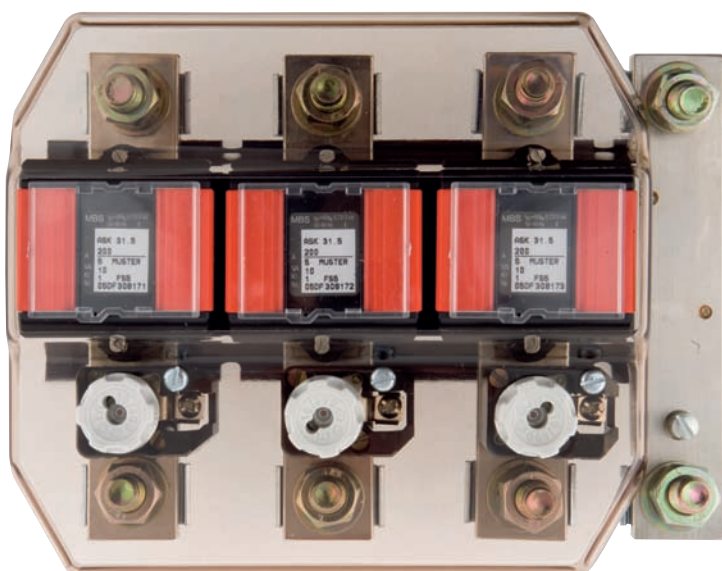
The measuring transformer set consists of 3 individual current transformers which are mounted on an aluminium base plate together with the primary conductors L1, L2, L3. Transparent sealable covers protect the secondary terminals of the current transformers against external tampering.

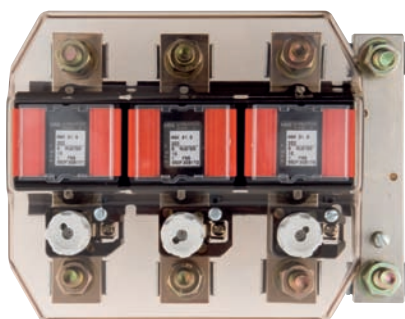
Stipulation of the VBG4 (German protection clause) demands that all voltage carrying parts are made shock-proof with transparent isolating covers which are included in the deliveries.

As an option the current transformer set can be supplied with or without fuses. The voltage can be tapped either from the 10 A-fuse element or directly from the individual primary conductor.

The configuration of this current transformer set conforms to:



DIN VDE 0414/1
DIN 42600 IEC 185
VBG 4





ASK(D) 31.5

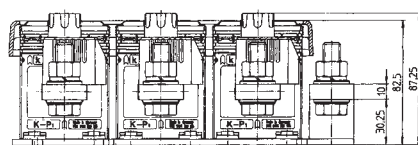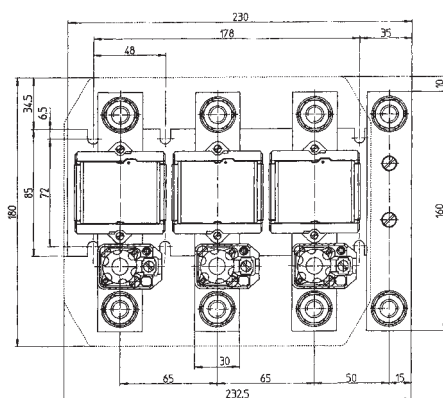Three-phase current transformer set



Secondary current		5A		1A	
Primary current A	Burden VA	Accuracy class		Accuracy class	
		1	0.5	1	0.5
		Art.-no.	Art.-no.	Art.-no.	Art.-no.
3 x 75	2.5	57043	57011	57243	57211
	5	57044	57012	57244	57212
3 x 100	2.5	57045	57013	57245	57213
	5	57046	57014	57246	57214
3 x 150	2.5	57047	57015	57247	57215
	5	57048	57016	57248	57216
3 x 200	2.5	57049	57017	57249	57217
	5	57050	57018	57250	57218
3 x 250	2.5	57051	57019	57251	57219
	5	57052	57020	57252	57220
3 x 300	2.5	57053	57021	57253	57221
	5	57054	57022	57254	57222
3 x 400	2.5	57055	57023	57255	57223
	5	57056	57024	57256	57224
3 x 500	2.5	57057	57025	57257	57225
	5	57058	57026	57258	57226
3 x 600	2.5	57059	57027	57259	57227
	5	57060	57028	57260	57228
3 x 750	2.5	57061	57029	57261	57229
	5	57062	57030	57262	57230
3 x 1000	2.5	57063	57031	57263	57231
	5	57064	57032	57264	57232
3 x 1500	2.5	57065	57033	57265	57233
	5	57066	57034	57266	57234
3 x 2000	2.5	57067	57035	57267	57235
	5	57068	57036	57268	57236
3 x 3000	2.5	57069	57037	57269	57237
	5	57070	57038	57270	57238
3 x 4000	2.5	57071	57039	57271	57239
	5	57072	57040	57272	57240
3 x 5000	2.5	57073	57041	57273	57241
	5	57074	57042	57274	57242

ASK(D) 31.5 2U

Secondary current		5A		1A	
Primary current A	Burden VA	Accuracy class		Accuracy class	
		1	0.5	1	0.5
		Art.-no.	Art.-no.	Art.-no.	Art.-no.
3 x 200-100	5-2.5	57090	57080	57290	57280
	10-5	57091	57081	57291	57281
3 x 300-150	5-2.5	57092	57082	57292	57282
	10-5	57093	57083	57293	57283
3 x 400-200	5-2.5	57094	57084	57294	57284
	10-5	57095	57085	57295	57285
3 x 500-250	5-2.5	57096	57086	57296	57286
	10-5	57097	57087	57297	57287
3 x 600-300	5-2.5	57098	57088	57298	57288
	10-5	57099	57089	57299	57289

Three-phase current transformer sets

WSKD 31.8

ASKD 31.8

with Plexiglas caps

Configuration:

The measuring transformer set of the WSKD 31.8 / ASKD 31.8 conform to the following standards:

- DIN EN 60044/1
- DIN 42600
- VBG 4.

Mounted in housing units, are the current transformer sets, consisting of 3 identical individual current transformers, fitted on a metallic base plate made of aluminium with a neutral conductor. The WSKD 31.8 is produced as a wound current transformer with 3 fixed primary windings for primary currents up to 150 A.


The ASKD 31.8 with primary nominal currents from 200 A are supplied with primary bus bars.

The current transformer set can be supplied with or without fuses. The voltage supply is optional and can be tapped either from the 10 A-fuse element or directly from the individual primary conductor.

With 4 mm bore-holes arranged within the secondary connection terminals, a short circuit of the secondary circuit is made possible, when interchanging energy meters. The transformer set can be supplied with or without a base plate (without a base plate there is no neutral conductor rail). All voltage carrying parts of the assembled current transformer sets are made shock-proof with isolating covers which are included in the deliveries.

General technical details:




Max. permitted operating voltage:	0.72 kV
Rated frequency:	50 Hz
Over current rated limiting factor:	FS 5
Thermal rated continuous current intensity:	$1.2 \times I_N$
Thermal rated short time current:	$50 \times I_N$ (WSKD 31.8) $60 \times I_N$ (ASKD 31.8)
Isolation class:	E

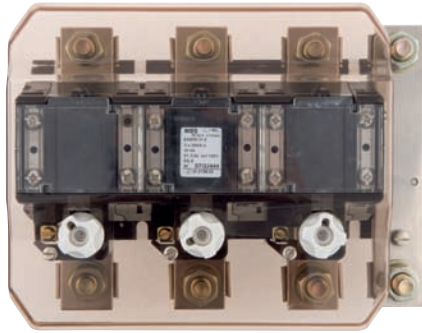

WSKD 31.8

Three-phase current transformer set

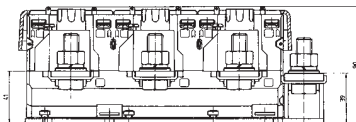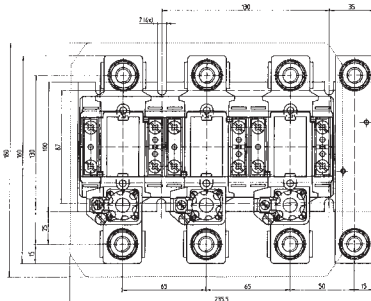
with base plate



without base plate and neutral conductor

Secondary current		5A		1A	
Primary current A	Burden VA	Accuracy class		Accuracy class	
		1	0.5	1	0.5
		Art.-no.	Art.-no.	Art.-no.	Art.-no.
3 x 50	2.5	44030	44011	44230	44211
	5	44031	44012	44231	44212
	10	44032	44013	44232	44213
3 x 75	2.5	44034	44015	44234	44215
	5	44035	44016	44235	44216
	10	44036	44017	44236	44217
3 x 100	2.5	44038	44019	44238	44219
	5	44039	44020	44239	44220
	10	44040	44021	44240	44221
3 x 150	2.5	44042	44023	44242	44223
	5	44043	44024	44243	44224
	10	44044	44025	44244	44225




Secondary current		5A		1A	
Primary current A	Burden VA	Accuracy class		Accuracy class	
		1	0.5	1	0.5
		Art.-no.	Art.-no.	Art.-no.	Art.-no.
3 x 50	2.5	45030	45011	45230	45211
	5	45031	45012	45231	45212
	10	45032	45013	45232	45213
3 x 75	2.5	45034	45015	45234	45215
	5	45035	45016	45235	45216
	10	45036	45017	45236	45217
3 x 100	2.5	45038	45019	45238	45219
	5	45039	45020	45239	45220
	10	45040	45021	45240	45221
3 x 150	2.5	45042	45023	45242	45223
	5	45043	45024	45243	45224
	10	45044	45025	45244	45225

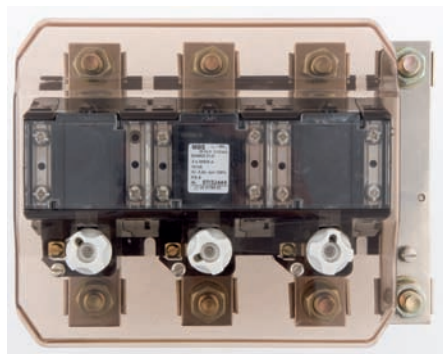

ASKD 31.8

Three-phase current transformer set

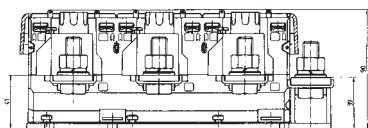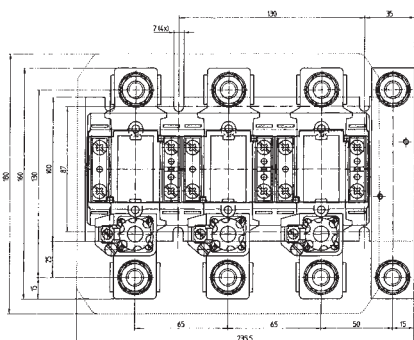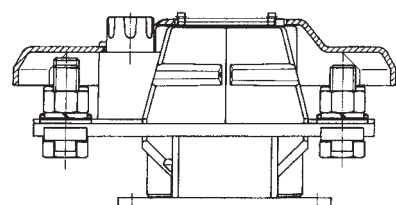with base plate



Secondary current		5A		1A	
Primary current A	Burden VA	Accuracy class		Accuracy class	
		1	0.5	1	0.5
		Art.-no.	Art.-no.	Art.-no.	Art.-no.
3 x 200	2.5	46041	46011	46241	46211
	5	46042	46012	46242	46212
	10	46043	46013	46243	46213
3 x 250	2.5	46045	46015	46245	46215
	5	46046	46016	46246	46216
	10	46047	46017	46247	46217
3 x 300	2.5	46049	46019	46249	46219
	5	46050	46020	46250	46220
	10	46051	46021	46251	46221
	15	46052	46022	46252	46222
3 x 400	2.5	46053	46023	46253	46223
	5	46054	46024	46254	46224
	10	46055	46025	46255	46225
	15	46056	46026	46256	46226
3 x 500	2.5	46058	46028	46258	46228
	5	46059	46029	46259	46229
	10	46060	46030	46260	46230
	15	46061	46031	46261	46231
3 x 600	2.5	46063	46033	46263	46233
	5	46064	46034	46264	46234
	10	46065	46035	46265	46235
	15	46066	46036	46266	46236

without base plate and neutral conductor


Secondary current		5A		1A	
Primary current A	Burden VA	Accuracy class		Accuracy class	
		1	0.5	1	0.5
		Art.-no.	Art.-no.	Art.-no.	Art.-no.
3 x 200	2.5	47041	47011	47241	47211
	5	47042	47012	47242	47212
	10	47043	47013	47243	47213
3 x 250	2.5	47045	47015	47245	47215
	5	47046	47016	47246	47216
	10	47047	47017	47247	47217
3 x 300	2.5	47049	47019	47249	47219
	5	47050	47020	47250	47220
	10	47051	47021	47251	47221
	15	47052	47022	47252	47222
3 x 400	2.5	47053	47023	47253	47223
	5	47054	47024	47254	47224
	10	47055	47025	47255	47225
	15	47056	47026	47256	47226
3 x 500	2.5	47058	47028	47258	47228
	5	47059	47029	47259	47229
	10	47060	47030	47260	47230
	15	47061	47031	47261	47231
3 x 600	2.5	47063	47033	47263	47233
	5	47064	47034	47264	47234
	10	47065	47035	47265	47235
	15	47066	47036	47266	47236

Low voltage current transformers for tariff applications

Tube current transformers

EASR 14.3


Round conductor
Transformer width



Ø 14 mm
61 mm

EASR 22.3

Round conductor
Transformer width




Ø 22.5 mm
61 mm

Plug-in current transformers

EASK 21.3


Primary conductor
Round conductor
Transformer width



20 x 10 mm
Ø 19.2 mm
61 mm

EASK 31.3


Primary conductor
Round conductor
Transformer width



30 x 10 mm
2 x 20 x 10 mm
Ø 26 mm
61 mm

EASK 31.4


Primary conductor
Round conductor
Transformer width



30 x 10 mm
2 x 20 x 10 mm
Ø 28 mm
61 mm

EASK 31.5 EASK 31.5 2U


Primary conductor
Round conductor
Transformer width



30 x 10 mm
2 x 20 x 10 mm
Ø 28 mm
61 mm


EASK 31.6

Primary conductor
Round conductor
Transformer width



30 x 10 mm
20 x 13 mm
Ø 23 mm
95 mm



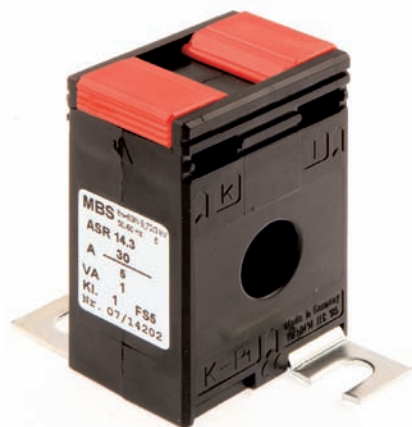
Type "E" denotes that the current transformers are suitable for calibration




EASR 14.3

Tube current transformer

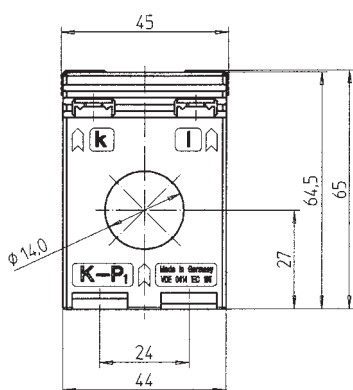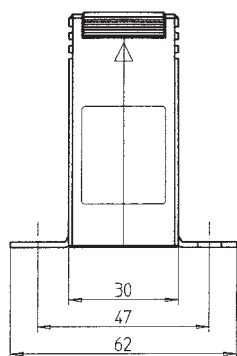Approved current transformer for tariff applications



Secondary current		5A			1A	
Primary current	Burden	Accuracy class			Accuracy class	
		0.5	0.5s	0.2	0.5	0.2
A	VA	Art.-no.	Art.-no.	Art.-no.	Art.-no.	Art.-no.
75	1.5	26584	26590		26770	
80	1.5	26585	26591		26771	
100	1.5	26586	26592	26561	26786	26777
120	1.5	26587	26593	26563	26772	26778
	2.5	26588	26594		26773	
125	1.5	26599	26595	26564	26774	26779
	2.5	26560	26597	26565	26775	
150	1.5	26561	26598	26566	26776	26780
	2.5	26589	26596	26567	26789	



Snap-on mounting




Primary conductor	
Round conductor	Ø 14.0 mm
Transformer width	45 mm
Snap-on mounting	Art.-no. 55013 see page 204
Sealed shutter	see page 205
Current transformer for industrial applications	see page 30




EASR 22.3

Tube current transformer

Approved current transformer for tariff applications



Secondary current		5A			1A	
Primary current A	Burden VA	Accuracy class			Accuracy class	
		0.5	0.5s	0.2	0.5	0.2
		Art.-no.	Art.-no.	Art.-no.	Art.-no.	Art.-no.
100	1.5	3530	3552	3511	3730	3711
	2.5	3531	3553		3731	
150	1.5	3532	3554	3512	3732	3712
	2.5	3533	3555	3513	3733	3713
	5	3534	3556		3734	
200	1.5	3535	3557	3514	3735	3714
	2.5	3536	3558	3515	3736	3715
	5	3537	3559	3516	3737	3716
250	2.5	3538	3560	3517	3738	3717
	5	3539	3561	3518	3739	3718
300	2.5	3540	3562	3519	3740	3719
	5	3541	3563	3520	3741	3720
	10	3542	3564			
400	2.5	3543	3565	3521	3743	3721
	5	3544	3566	3522	3744	3722
	10	3545	3567	3523	3745	3723
500	2.5	3546	3568	3524	3746	3724
	5	3547	3569	3525	3747	3725
	10	3548	3570	3526	3748	3726
600	2.5	3549	3571	3527	3749	3727
	5	3550	3572	3528	3750	3728
	10	3551	3573	3529	3751	3729



Snap-on mounting




Primary conductor	
Round conductor	Ø 22.5 mm
Transformer width	61 mm
Snap-on mounting	Art.-no. 53011 see page 204
Sealed shutter	Art.-no. 59040 see page 205
Current transformer for industrial applications	see page 35
Protection plug-in current transformers	see page 125




EASK 21.3

Plug-in current transformer

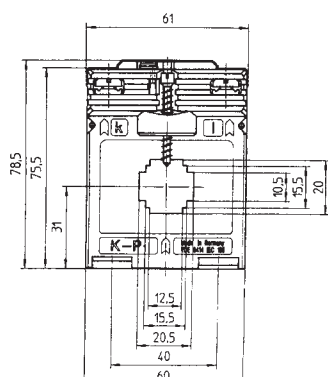Approved current transformer for tariff applications



Secondary current		5A			1A	
Primary current A	Burden VA	Accuracy class			Accuracy class	
		0.5	0.5s	0.2	0.5	0.2
		Art.-no.	Art.-no.	Art.-no.	Art.-no.	Art.-no.
100	1.5	6530	6549	6511	6730	6711
	2.5	6531	6550		6731	
150	1.5	6532	6551	6513	6732	6713
	2.5	6533	6552	6514	6733	6714
	5	6534	6553		6734	
200	1.5	6535	6554	6516		
	2.5	6536	6555	6517	6736	6717
	5	6537	6556	6518	6737	6718
250	2.5	6538	6557	6519	6738	6719
	5	6539	6558	6520	6739	6720
300	2.5	6540	6559	6521	6740	6721
	5	6541	6560	6522	6741	6722
	10	6542	6561			
400	2.5	6543	6562	6524	6743	6724
	5	6544	6563	6525	6744	6725
	10	6545	6564	6526	6745	6726
500	2.5	6546	6565	6527	6746	6727
	5	6547	6566	6528	6747	6728
	10	6548	6567	6529	6748	6729



Snap-on mounting




Primary conductor	20 x 10 mm
Round conductor	Ø 19.2 mm
Transformer width	61 mm
Snap-on mounting	Art.-no. 53011 see page 204
Sealed shutter	Art.-no. 59040 see page 205
Current transformer for industrial applications	see page 43
Protection plug-in current transformers	see page 126




EASK 31.3

Plug-in current transformer

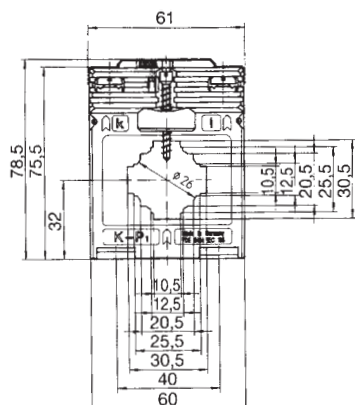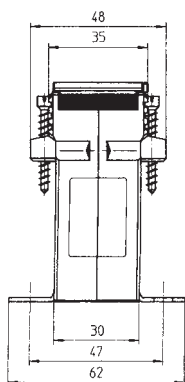Approved current transformer for tariff applications



Secondary current		5A		
Primary current A	Burden VA	Accuracy class		
		0.5	0.5s	0.2
		Art.-no.	Art.-no.	Art.-no.
100	1.5	7533	7555	7511
	2.5	7534	7556	
150	1.5	7535	7557	7513
	2.5	7536	7558	
200	2.5	7537	7559	7515
	5	7538	7560	7516
250	2.5	7539	7561	7517
	5	7540	7562	7518
300	2.5	7541	7563	7519
	5	7542	7564	7520
400	2.5	7543	7565	7521
	5	7544	7566	7522
500	2.5	7546	7568	7524
	5	7547	7569	7525
600	2.5	7549	7571	7527
	5	7550	7572	7528
750	2.5	7552	7574	7530
	5	7553	7575	7531



Snap-on mounting




Primary conductor	30 x 10 mm 2 x 20 x 10 mm
Round conductor	Ø 26 mm
Transformer width	61 mm
Snap-on mounting	Art.-no. 53011 see page 204
Sealed shutter	Art.-no. 59040 see page 205
Current transformer for industrial applications	see page 45




EASK 31.4

Plug-in current transformer

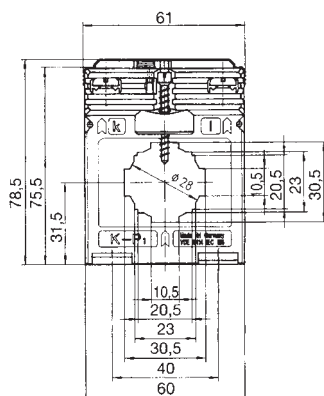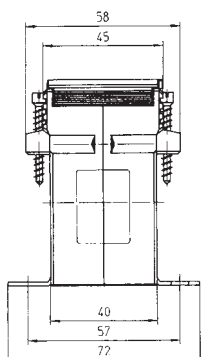Approved current transformer for tariff applications



Secondary current		5A			1A	
Primary current A	Burden VA	Accuracy class			Accuracy class	
		0.5	0.5s	0.2	0.5	0.2
		Art.-no.	Art.-no.	Art.-no.	Art.-no.	Art.-no.
100	1.5			8510		
	2.5	8535	8559	8511	8735	8711
150	2.5	8536	8560	8512	8736	8712
	5	8537	8561		8737	
200	2.5	8538	8562	8514	8738	8714
	5	8539	8563	8515	8739	8715
250	2.5	8540	8564	8516	8740	8716
	5	8541	8565	8517	8741	8717
300	2.5	8542	8566	8518	8742	8718
	5	8543	8567	8519	8743	8719
	10	8544	8568	8520	8744	8720
400	2.5	8545	8569	8521	8745	8721
	5	8546	8570	8522	8746	8722
	10	8547	8571	8523	8747	8723
500	2.5	8548	8572	8524	8748	8724
	5	8549	8573	8525	8749	8725
	10	8550	8574	8526	8750	8726
600	2.5	8551	8575	8527	8751	8727
	5	8552	8576	8528	8752	8728
	10	8553	8577	8529	8753	8729
	15	8554	8578		8754	
750	2.5	8555	8579	8531	8755	8731
	5	8556	8580	8532	8756	8732
	10	8557	8581	8533	8757	8733
	15	8558	8582		8758	



Snap-on mounting


Primary conductor	30 x 10 mm 2 x 20 x 10 mm
Round conductor	Ø 28 mm
Transformer width	61 mm
Snap-on mounting	Art.-no. 54011 see page 204
Sealed shutter	Art.-no. 59041 see page 205
Current transformer for industrial applications	see page 47



EASK 31.5

Plug-in current transformer

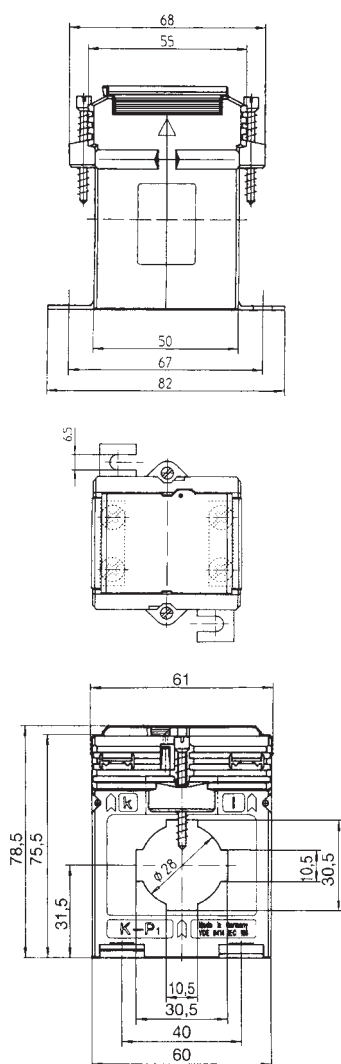Approved current transformer for tariff applications



Secondary current		5A				1A	
Primary current A	Burden VA	Accuracy class				Accuracy class	
		0.5	0.5s	0.2	0.2s	0.5	0.2
		Art.-no.	Art.-no.	Art.-no.	Art.-no.	Art.-no.	Art.-no.
75	2.5	9542	9574			9742	
100	2.5	9543	9575	9511		9743	9711
	5	9544	9576			9744	
150	2.5	9545	9577	9513	V17-1604D	9745	9713
	5	9546	9578	9514		9746	9714
200	2.5	9547	9579	9515	V17-1704D	9747	9715
	5	9548	9580	9516	V17-1704F	9748	9716
	10	9549	9581			9749	
250	2.5	9550	9582	9518	V17-1804D	9750	9718
	5	9551	9583	9519	V17-1804F	9751	9719
	10	9552	9584	9520		9752	9720
	15	9553	9585			9753	
300	2.5	9554	9586	9522	V17-1904D	9754	9722
	5	9555	9587	9523	V17-1904F	9755	9723
	10	9556	9588	9524		9756	9724
	15	9557	9589			9757	
400	2.5	9558	9590	9526	V17-2004D	9758	9726
	5	9559	9591	9527	V17-2004F	9759	9727
	10	9560	9592	9528	V17-2004H	9760	9728
	15	9561	9593			9761	
500	2.5	9562	9594	9530	V17-2104D	9762	9730
	5	9563	9595	9531	V17-2104F	9763	9731
	10	9564	9596	9532	V17-2104H	9764	9732
	15	9565	9597			9765	
600	2.5	9566	9598	9534	V17-2204D	9766	9734
	5	9567	9599	9535	V17-2204F	9767	9735
	10	9568	9600	9536	V17-2204H	9768	9736
	15	9569	9601			9769	
750	2.5	9570	9602	9538	V17-2304D	9770	9738
	5	9571	9603	9539	V17-2304F	9771	9739
	10	9572	9604	9540	V17-2304H	9772	9740
	15	9573	9605			9773	

EASK 31.5 2U

Primary conductor	30 x 10 mm 2 x 20 x 10 mm
Round conductor	Ø 28 mm
Transformer width	61 mm
Snap-on mounting	Art.-no. 55011 see page 204
Sealed shutter	Art.-no. 59041 see page 205
Current transformer for industrial applications	see page 49
Protection plug-in current transformers	see page 127



Secondary current		5A	
Primary current A	Burden VA	Accuracy class	
		0.5	0.5s
		Art.-no.	Art.-no.
200-100	5-2.5	9606	9616
	10-5	9607	
300-150	5-2.5	9608	9618
	10-5	9609	9619
400-200	5-2.5	9610	9620
	10-5	9611	9621
500-250	5-2.5	9612	9622
	10-5	9613	9623
600-300	5-2.5	9614	9624
	10-5	9615	9625



EASK 31.6

Plug-in current transformer





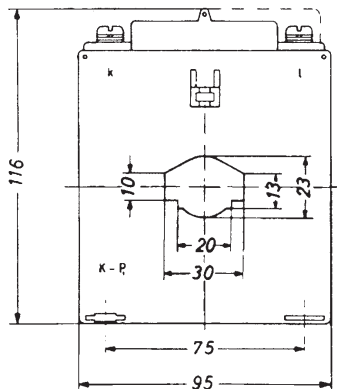
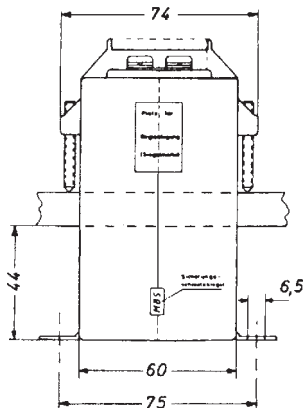
Approved current transformer for tariff applications



Secondary current		5A			1A	
Primary current A	Burden VA	Accuracy class			Accuracy class	
		0.5	0.5s	0.2	0.5	0.2
		Art.-no.	Art.-no.	Art.-no.	Art.-no.	Art.-no.
50	2.5	10547	10585		10747	
75	2.5	10548	10586		10748	
	5	10549	10587		10749	
100	2.5	10550	10588	10513	10750	10713
	5	10551	10589	10514	10751	10714
	10	10552	10590		10752	
150	2.5	10553	10591	10516	10753	10716
	5	10554	10592	10517	10754	10717
	10	10555	10593		10755	
	15	10556	10594		10756	
200	5	10557	10595	10521	10757	10721
	10	10558	10596	10522	10758	10722
	15	10559	10597		10759	
250	5	10560	10598	10524	10760	10724
	10	10561	10599	10525	10761	10725
	15	10563	10600		10763	
300	5	10565	10602	10528	10765	10728
	10	10566	10603	10529	10766	10729
	15	10567	10604		10767	
	30	10568	10605		10768	
400	5	10569	10606	10532	10769	10732
	10	10570	10607	10533	10770	10733
	15	10571	10608	10534	10771	10734
	30	10572	10609		10772	
500	5	10573	10610	10536	10773	10736
	10	10574	10611	10537	10774	10737
	15	10575	10612	10538	10775	10738
	30	10576	10613		10776	
600	5	10577	10614	10540	10777	10740
	10	10578	10615	10541	10778	10741
	15	10579	10616	10542	10779	10742
	30	10580	10617		10780	
750	5	10581	10618	10543	10781	10743
	10	10582	10619	10544	10782	10744
	15	10583	10620	10545	10783	10745
	30	10584	10621		10784	

Primary conductor	30 x 10 mm 20 x 13 mm
Round conductor	Ø 23 mm
Transformer width	95 mm
Snap-on mounting	–
Sealed shutter	Art.-no. 59044 see page 205
Current transformer for industrial applications	see page 51
Protection plug-in current transformers	see page 128

Low voltage current transformers for tariff applications

EASK 41.4 EASK 41.4 2U	Primary conductor		40 x 10 mm
	Round conductor		2 x 30 x 5 mm
	Transformer width		Ø 32 mm 71 mm
EASK 41.5	Primary conductor		40 x 10 mm
	Round conductor		2 x 30 x 5 mm
	Transformer width		Ø 32 mm 71 mm
EASK 41.6	Primary conductor		40 x 12 mm
	Round conductor		30 x 15 mm
	Transformer width		Ø 32 mm 95 mm
EASK 541.4	Primary conductor		40 x 10 mm
	Round conductor		2 x 30 x 5 mm
	Transformer width		Ø 32 mm 86 mm
EASK 41.6 EASK 41.6 2U	Primary conductor		50 x 12 mm
	Round conductor		2 x 40 x 10 mm
	Transformer width		Ø 44 mm 86 mm
EASK 51.6	Primary conductor		50 x 12 mm
	Round conductor		40 x 30 mm
	Transformer width		Ø 40 mm 95 mm


Type “E” denotes that the current transformers are suitable for calibration



EASK 41.4

Plug-in current transformer

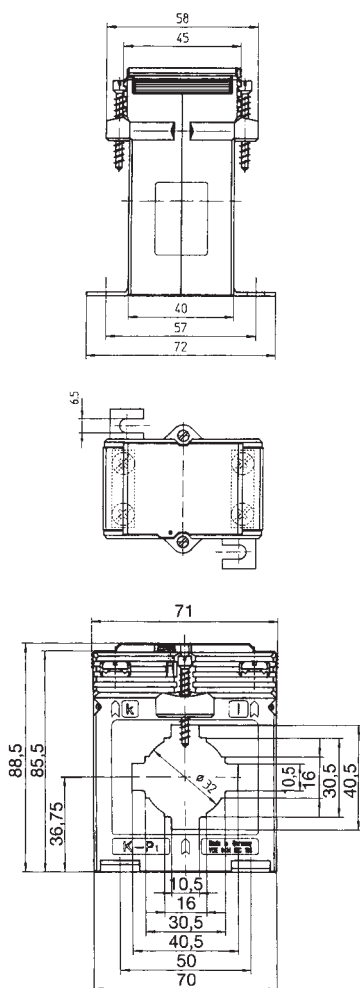Approved current transformer for tariff applications



Secondary current		5A			1A	
Primary current A	Burden VA	Accuracy class			Accuracy class	
		0.5	0.5s	0.2	0.5	0.2
		Art.-no.	Art.-no.	Art.-no.	Art.-no.	Art.-no.
100	1.5	13540	13569	13511	13740	13711
	2.5	13541	13570		13741	
150	1.5	13542	13571	13513	13742	13713
	2.5	13543	13572	13514	13743	13714
	5	13544	13573		13744	
200	1.5	13545	13574	13516	13745	13716
	2.5	13546	13575	13517	13746	13717
	5	13548	13576	13518	13747	13718
250	1.5					13719
	2.5	13549	13578	13520	13749	13720
	5	13550	13579	13521	13750	13721
300	2.5	13551	13580	13522	13751	13722
	5	13552	13581	13523	13752	13723
	10	13553	13582		13753	
400	2.5	13554	13583	13525	13754	13725
	5	13555	13584	13526	13755	13726
	10	13556	13585	13527	13756	13727
500	2.5	13557	13586	13528	13757	13728
	5	13558	13587	13529	13758	13729
	10	13559	13588	13530	13759	13730
	15	13560	13589	13531	13760	13731
600	2.5	13561	13590	13532	13761	13732
	5	13562	13591	13533	13762	13733
	10	13563	13592	13534	13763	13734
	15	13564	13593	13535	13764	13735
750	2.5	13565	13594	13536	13765	13736
	5	13566	13595	13537	13766	13737
	10	13567	13596	13538	13767	13738
	15	13568	13597	13539	13768	

EASK 41.4 2U

Primary conductor	40 x 10 mm 2 x 30 x 5 mm
Round conductor	Ø 32 mm
Transformer width	71 mm
Snap-on mounting	Art.-no. 55012 see page 204
Sealed shutter	Art.-no. 59041 see page 205
Current transformer for industrial applications	see page 56
Protection plug-in current transformers	see page 133


Secondary current		5A	
Primary current A	Burden VA	Accuracy class	
		0.5	0.5s
		Art.-no.	Art.-no.
200-100	5-2.5	13598	13607
300-150	5-2.5	13599	13608
	10-5	13600	13609
400-200	5-2.5	13601	13610
	10-5	13602	13611
500-250	5-2.5	13603	13612
	10-5	13604	13613
600-300	5-2.5	13605	13614
	10-5	13606	13615



EASK 41.5

Plug-in current transformer

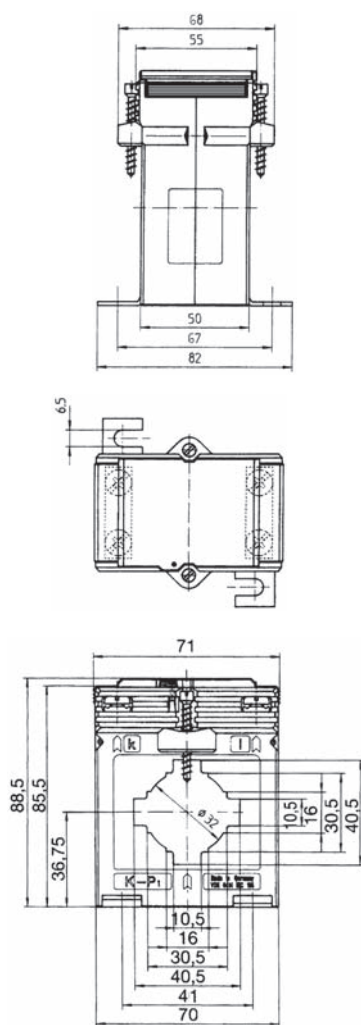Approved current transformer for tariff applications



Secondary current		5A			1A	
Primary current A	Burden VA	Accuracy class			Accuracy class	
		0.5 Art.-no.	0.5s Art.-no.	0.2 Art.-no.	0.5 Art.-no.	0.2 Art.-no.
75	2,5	1010505001			1010705001	
80	2,5	1010505002			1010705002	
100	1,5	1010505003	1010504001	1010503001	1010705003	1010703001
	2,5	1010505004	1010504002		1010705004	1010703002
150	2,5	1010505005	1010504003	1010503002	1010705005	1010703003
	5	1010505006	1010504004		1010705006	1010703004
200	1,5			1010503003		1010703005
	2,5	1010505007	1010504005	1010503033	1010705007	1010703034
	5	1010505008	1010504006	1010503004	1010705008	1010703006
	10				1010705009	
250	2,5	1010505009	1010504007	1010503005	1010705010	1010703007
	5	1010505010	1010504008	1010503006	1010705011	1010703008
	10	1010505011	1010504009	1010503007	1010705012	
300	2,5	1010505012	1010504010	1010503008	1010705013	1010703009
	5	1010505013	1010504011	1010503009	1010705014	1010703010
	10	1010505014	1010504012	1010503010	1010705015	1010703011
	15	1010505015	1010504013		1010705016	
400	2,5	1010505016	1010504014	1010503011	1010705017	1010703012
	5	1010505017	1010504015	1010503012	1010705018	1010703013
	10	1010505018	1010504016	1010503013	1010705019	1010703014
	15	1010505019	1010504017		1010705020	
500	2,5	1010505020	1010504018	1010503014	1010705021	1010703015
	5	1010505021	1010504019	1010503015	1010705022	1010703016
	10	1010505022	1010504020	1010503016	1010705023	1010703017
	15	1010505023	1010504021		1010705024	
600	2,5	1010505024	1010504022	1010503017	1010705025	1010703018
	5	1010505025	1010504023	1010503018	1010705026	1010703019
	10	1010505026	1010504024	1010503019	1010705027	1010703020
	15	1010505027	1010504025	1010503020	1010705028	1010703021
750	2,5	1010505028	1010504026	1010503021	1010705029	1010703022
	5	1010505029	1010504027	1010503022	1010705030	1010703023
	10	1010505030	1010504028	1010503023	1010705031	1010703024
	15	1010505031	1010504029	1010503024	1010705032	1010703025
800	2,5	1010505032	1010504030	1010503025	1010705033	1010703026
	5	1010505033	1010504031	1010503026	1010705034	1010703027
	10	1010505034	1010504032	1010503027	1010705035	1010703028
	15	1010505035	1010504033	1010503028	1010705036	1010703029
1000	2,5	1010505036	1010504034	1010503029	1010705037	1010703030
	5	1010505037	1010504035	1010503030	1010705038	1010703031
	10	1010505038	1010504036	1010503031	1010705039	1010703032
	15	1010505039	1010504037	1010503032	1010705040	1010703033



Primary conductor	40 x 10 mm 2 x 30 x 5 mm
Round conductor	Ø 32 mm
Transformer width	71 mm
Snap-on mounting	Art.-no. 55011 see page 204
Sealed shutter	Art.-no. 59041 see page 205
Current transformer for industrial applications	see page 58



EASK 41.6


Plug-in current transformer

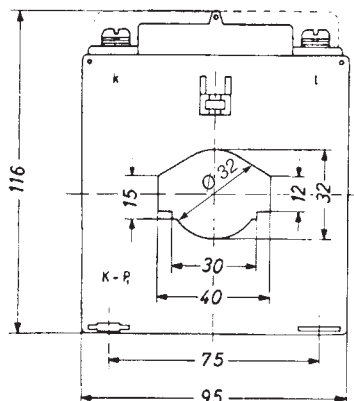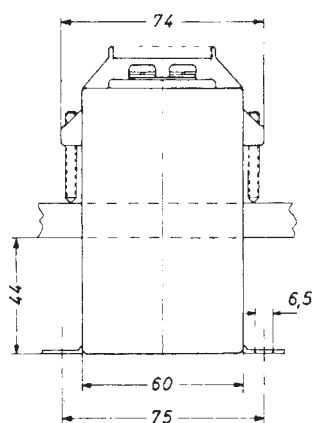Approved current transformer for tariff applications



Primary conductor	40 x 12 mm 30 x 15 mm
Round conductor	Ø 32 mm
Transformer width	95 mm
Snap-on mounting	–
Sealed shutter	Art.-no. 59044 see page 205
Current transformer for industrial applications	see page 61
Protection plug-in current transformers	see page 134


Secondary current		5A			1A	
Primary current A	Burden VA	Accuracy class			Accuracy class	
		0.5	0.5s	0.2	0.5	0.2
		Art.-no.	Art.-no.	Art.-no.	Art.-no.	Art.-no.
75	2.5	14552	14595		14752	
	5	14553	14596		14753	
100	2.5	14554	14597	14513	14754	14713
	5	14555	14598		14755	
	10	14556	14599		14756	
150	2.5	14557	14600	14516	14757	14716
	5	14558	14601	14517	14758	14717
	10	14559	14602		14759	
	15	14560	14603		14760	
200	2.5	14561	14604	14520	14761	14720
	5	14562	14605	14521	14762	14721
	10	14563	14606	14522	14763	14722
	15	14564	14607		14764	
250	2.5	14565	14608	14524	14765	14724
	5	14566	14609	14525	14766	14725
	10	14567	14610	14526	14767	14726
	15	14568	14611		14768	
300	2.5	14569	14612	14528	14769	14728
	5	14570	14613	14529	14770	14729
	10	14571	14614	14530	14771	14730
	15	14572	14615	14531	14772	14731
400	2.5	14573	14616	14532	14773	14732
	5	14574	14617	14533	14774	14733
	10	14575	14618	14534	14775	14734
	15	14576	14619	14535	14776	14735
500	2.5	14577	14620	14536	14777	14736
	5	14578	14621	14537	14778	14737
	10	14579	14622	14538	14779	14738
	15	14580	14623	14539	14780	14739
600	2.5	14581	14624	14540	14781	14740
	5	14582	14625	14541	14782	14741
	10	14583	14626	14542	14783	14742
	15	14584	14627	14543	14784	14743
	30	14585	14628			
750	2.5	14586	14629	14544	14786	14744
	5	14587	14630	14545	14787	14745
	10	14588	14631	14546	14788	14746
	15	14589	14632	14547	14789	14747
	30	14590	14633			
1000	5	14591	14634	14548	14791	14748
	10	14592	14635	14549	14792	14749
	15	14593	14636	14550	14793	14750
	30	14594	14637			

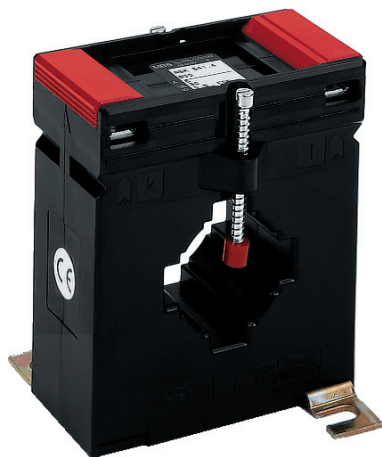

EASK 541.4


Plug-in current transformer

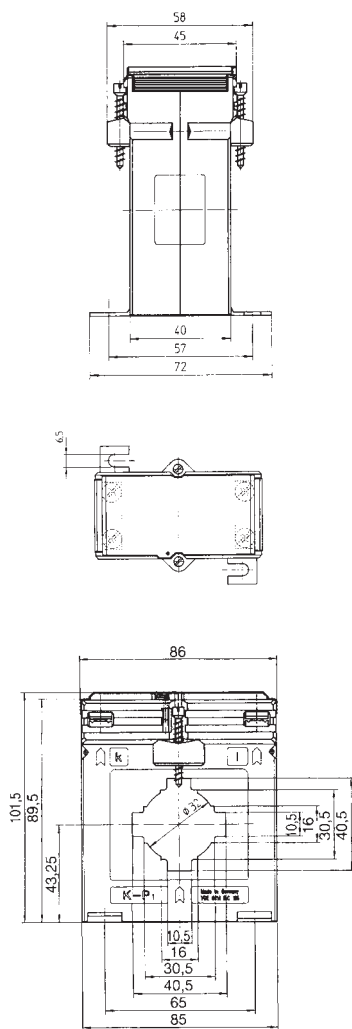Approved current transformer for tariff applications



Primary conductor	40 x 10 mm 2 x 30 x 5 mm
Round conductor	Ø 32 mm
Transformer width	86 mm
Snap-on mounting	–
Sealed shutter	Art.-no. 59042 see page 205
Current transformer for industrial applications	see page 64
Protection plug-in current transformers	see page 140




Secondary current		5A			1A	
Primary current A	Burden VA	Accuracy class			Accuracy class	
		0.5	0.5s	0.2	0.5	0.2
		Art.-no.	Art.-no.	Art.-no.	Art.-no.	Art.-no.
75	1.5	15557	15603		15757	
	2.5	15558	15604		15758	
100	1.5	15559	15605	15513	15759	15713
	2.5	15560	15606	15514	15760	15714
	5	15561	15607		15761	
150	1.5	15562	15608	15516	15762	15716
	2.5	15563	15609	15517	15763	15717
	5	15564	15610	15518	15764	15718
	10	15565	15611		15765	
200	2.5	15566	15612	15520	15766	15720
	5	15567	15613	15521	15767	15721
	10	15568	15614	15522	15768	15722
	15	15569	15615		15769	
250	2.5	15570	15616	15524	15770	15724
	5	15571	15617	15525	15771	15725
	10	15572	15618	15526	15772	15726
	15	15573	15619		15773	15727
300	2.5	15574	15620	15528	15774	15728
	5	15575	15621	15529	15775	15729
	10	15576	15622	15530	15776	15730
	15	15577	15623	15531	15777	15731
400	2.5	15578	15624	15532	15778	15732
	5	15579	15625	15533	15779	15733
	10	15580	15626	15534	15780	15734
	15	15581	15627	15535	15781	15735
	30	15582	15628			
500	2.5	15583	15629	15537	15783	15737
	5	15584	15630	15538	15784	15738
	10	15585	15631	15539	15785	15739
	15	15586	15632	15540	15786	15740
	30	15587	15633			
600	2.5	15588	15634	15542	15788	15742
	5	15589	15635	15543	15789	15743
	10	15590	15636	15544	15790	15744
	15	15591	15637	15545	15791	15745
	30	15592	15638	15546		
750	2.5	15593	15639	15547	15793	15747
	5	15594	15640	15548	15794	15748
	10	15595	15641	15549	15795	15749
	15	15596	15642	15550	15796	15750
	30	15597	15643	15551		
1000	2.5	15598	15644	15552		
	5	15599	15645	15553	15799	15753
	10	15600	15646	15554	15800	15754
	15	15601	15647	15555	15801	15755
	30	15602	15648	15556		

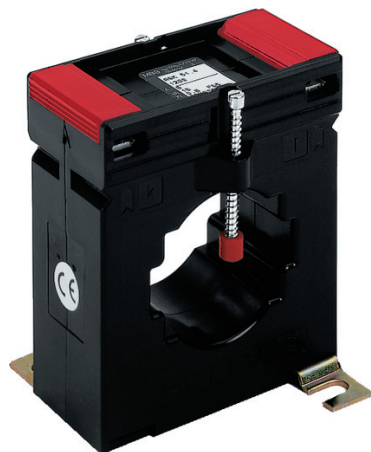

EASK 51.4

Plug-in current transformer

Approved current transformer for tariff applications



Secondary current		5A			1A	
Primary current A	Burden VA	Accuracy class			Accuracy class	
		0.5	0.5s	0.2	0.5	0.2
		Art.-no.	Art.-no.	Art.-no.	Art.-no.	Art.-no.
100	1.5	16542	16573		16742	
	2.5	16543	16574		16743	
150	1.5	16544	16575	16513	16744	16713
	2.5	16545	16576		16745	
200	1.5	16546	16577	16515	16746	16715
	2.5	16547	16578	16516	16747	16716
	5	16548	16579	16517	16748	16717
250	1.5	16549	16580	16518	16749	16718
	2.5	16550	16581	16519	16750	16719
	5	16551	16582	16520	16751	16720
300	2.5	16553	16584	16522	16753	16722
	5	16554	16585	16523	16754	16723
400	2.5	16555	16586	16524	16755	16724
	5	16556	16587	16525	16756	16725
	10	16557	16588	16526	16757	16726
500	2.5	16558	16589	16527	16758	16727
	5	16559	16590	16528	16759	16728
	10	16560	16591	16529	16760	16729
600	2.5	16561	16592	16530	16761	16730
	5	16562	16593	16531	16762	16731
	10	16563	16594	16532	16763	16732
	15	16564	16595	16533	16764	16733
750	2.5	16565	16596	16534		16734
	5	16566	16597	16535	16766	16735
	10	16567	16598	16536	16767	16736
	15	16568	16599	16537	16768	16737
1000	2.5	16569	16600	16538		
	5	16570	16601	16539	16770	16739
	10	16571	16602	16540	16771	16740
	15	16572	16603	16541	16772	16741

EASK 51.4 2U

Secondary current		5A	1A
Primary current A	Burden VA	Accuracy class	Accuracy class
		0.5	0.5s
		Art.-no.	Art.-no.
200-100	5-2.5	16611	16621
300-150	5-2.5	16612	16622
400-200	5-2.5	16613	16623
	10-5	16614	16624
500-250	5-2.5	16615	16625
	10-5	16616	16626
600-300	5-2.5	16617	16627
	10-5	16618	16628
1000-500	5-2.5	16619	16629
	10-5	16620	16630



Primary conductor	50 x 12 mm 2 x 40 x 10 mm
Round conductor	Ø 44 mm
Transformer width	86 mm
Snap-on mounting	—
Sealed shutter	Art.-no. 59042 see page 205
Current transformer for industrial applications	see page 65
Protection plug-in current transformers	see page 142



EASK 51.6

Plug-in current transformer

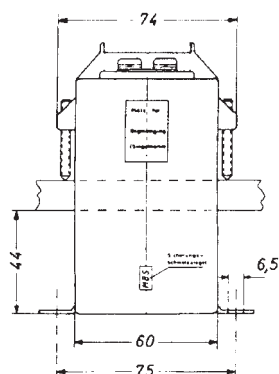Approved current transformer for tariff applications



Primary conductor	50 x 12 mm 40 x 30 mm
Round conductor	Ø 40 mm
Transformer width	95 mm
Snap-on mounting	—
Sealed shutter	Art.-no. 59044 see page 205
Current transformer for industrial applications	see page 67
Protection plug-in current transformers	see page 144

Secondary current		5A			1A	
Primary current A	Burden VA	Accuracy class			Accuracy class	
		0.5	0.5s	0.2	0.5	0.2
		Art.-no.	Art.-no.	Art.-no.	Art.-no.	Art.-no.
100	2.5	17555	17599	17511	17755	17711
	5	17556	17600		17756	
150	2.5	17557	17601	17513	17757	17713
	5	17558	17602	17514	17758	17714
	10	17559	17603		17759	
200	2.5	17560	17604	17516	17760	17716
	5	17561	17605	17517	17761	17717
	10	17562	17606		17762	
250	2.5	17563	17607	17519	17763	17719
	5	17564	17608	17520	17764	17720
	10	17565	17609	17521	17765	17721
	15	17566	17610		17766	
300	2.5	17567	17611	17523	17767	17723
	5	17568	17612	17524	17768	17724
	10	17569	17613	17525	17769	17725
	15	17570	17614		17770	
400	2.5	17571	17615	17527	17771	17727
	5	17572	17616	17528	17772	17728
	10	17573	17617	17529	17773	17729
	15	17574	17618		17774	
500	2.5	17575	17619	17531	17775	17731
	5	17576	17620	17532	17776	17732
	10	17577	17621	17533	17777	17733
	15	17578	17622		17778	
600	2.5	17579	17623	17535	17779	17735
	5	17580	17624	17536	17780	17736
	10	17581	17625	17537	17781	17737
	15	17582	17626	17538	17782	17738
750	2.5	17583	17627	17539	17783	17739
	5	17584	17628	17540	17784	17740
	10	17585	17629	17541	17785	17741
	15	17586	17630	17542	17786	17742
1000	5	17587	17631	17543	17787	17743
	10	17588	17632	17544	17788	17744
	15	17589	17633	17545	17789	17745
	30	17590	17634			
1200	5	17591	17635	17547	17791	17747
	10	17592	17636	17548	17792	17748
	15	17593	17637	17549	17793	17749
	30	17594	17638			
1250	5	17595	17639	17551	17795	17751
	10	17596	17640	17552	17796	17752
	15	17597	17641	17553	17797	17753
	30	17598	17642			




Low voltage current transformers for tariff applications

EASK 61.4

Primary conductor

Round conductor
Transformer width




60 x 10 mm
2 x 50 x 10 mm
Ø 44 mm
96 mm

EASK 61.6

Primary conductor


Round conductor
Transformer width



60 x 10 mm
50 x 30 mm
Ø 40 mm
95 mm

EASK 63.6

Primary conductor
Round conductor
Transformer width




60 x 30 mm
Ø 30 mm
88 mm

EASK 81.4

Primary conductor

Round conductor
Transformer width



80 x 10 mm
60 x 30 mm
2 x 60 x 10 mm
Ø 55 mm
120 mm




Type "E" denotes that the current transformers are suitable for calibration



EASK 61.4

Plug-in current transformer

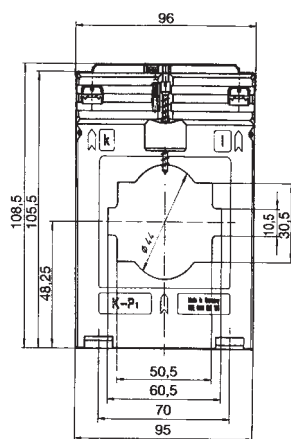Approved current transformer for tariff applications



Primary conductor	60 x 10 mm 2 x 50 x 10 mm
Round conductor	Ø 44 mm
Transformer width	96 mm
Snap-on mounting	–
Sealed shutter	Art.-no. 59042 see page 205
Current transformer for industrial applications	see page 70
Protection plug-in current transformers	see page 148



Secondary current		5A			1A	
Primary current A	Burden VA	Accuracy class			Accuracy class	
		0.5	0.5s	0.2	0.5	0.2
		Art.-no.	Art.-no.	Art.-no.	Art.-no.	Art.-no.
200	1.5	19555	19599	19511	19755	19711
	2.5	19556	19600	19512	19756	19712
250	1.5	19557	19601	19513	19757	19713
	2.5	19558	19602	19514	19758	19714
	5	19559	19603	19515	19759	19715
300	1.5	19560	19604	19516	19760	19716
	2.5	19561	19605	19517	19761	19717
	5	19562	19606	19518	19762	19718
	10	19563	19607		19763	
400	2.5	19564	19608	19520	19764	19720
	5	19565	19609	19521	19765	19721
	10	19566	19610	19522	19766	19722
500	2.5	19567	19611	19523	19767	19723
	5	19568	19612	19524	19768	19724
	10	19569	19613	19525	19769	19725
	15	19570	19614		19770	
600	2.5	19571	19615	19527	19771	19727
	5	19572	19616	19528	19772	19728
	10	19573	19617	19529	19773	19729
	15	19574	19618	19530	19774	19730
750	2.5	19575	19619	19531	19775	19731
	5	19576	19620	19532	19776	19732
	10	19577	19621	19533	19777	19733
	15	19578	19622	19534	19778	19734
1000	2.5	19580	19624	19536		19736
	5	19581	19625	19537	19780	19737
	10	19582	19626	19538	19781	19738
	15	19583	19627	19539	19782	
1200	30	19584	19628			
	2.5	19585	19629	19541		
	5	19586	19630	19542	19785	19741
	10	19587	19631	19543	19786	19742
1250	15	19588	19632	19544	19787	19743
	30	19589				
	5	19590	19634	19546	19790	19746
	10	19591	19635	19547	19791	19747
1500	15	19592	19636	19548	19792	19748
	30	19593	19637			
	5	19595	19639	19551	19795	19751
	10	19596	19640	19552	19796	19752
1500	15	19597	19641	19553	19797	19753
	30	19598	19642			



EASK 61.6

Plug-in current transformer

Approved current transformer for tariff applications



Secondary current		5A			1A	
Primary current A	Burden VA	Accuracy class			Accuracy class	
		0.5	0.5s	0.2	0.5	0.2
		Art.-no.	Art.-no.	Art.-no.	Art.-no.	Art.-no.
200	2.5	20552	20593	20511	20752	20711
	5	20553	20594		20753	
250	2.5	20554	20595	20513	20754	20713
	5	20555	20596	20514	20755	20714
	10	20556	20597		20756	
300	2.5	20557	20598	20516	20757	20716
	5	20558	20599	20517	20758	20717
	10	20559	20600	20518	20759	20718
	15	20560	20601		20760	
400	2.5	20561	20602	20520	20761	20720
	5	20562	20603	20521	20762	20721
	10	20563	20604	20522	20763	20722
	15	20564	20605		20764	
500	2.5	20565	20606	20524	20765	20724
	5	20566	20607	20525	20766	20725
	10	20567	20608	20526	20767	20726
	15	20568	20609		20768	
600	2.5	20569	20610	20528	20769	20728
	5	20570	20611	20529	20770	20729
	10	20571	20612	20530	20771	20730
	15	20572	20613		20772	
750	2.5	20573	20614	20532	20773	20732
	5	20574	20615	20533	20774	20733
	10	20575	20616	20534	20775	20734
	15	20576	20617	20535	20776	20735
1000	5	20577	20618	20536	20777	20736
	10	20578	20619	20537	20778	20737
	15	20579	20620	20538	20779	20738
	30	20580	20621			
1200	5	20581	20622	20540	20781	20740
	10	20582	20623	20541	20782	20741
	15	20583	20624	20542	20783	20742
	30	20584	20625			
1250	5	20585	20626	20544	20785	20744
	10	20586	20627	20545	20786	20745
	15	20587	20628	20546	20787	20746
	30	20588	20629			
1500	5	20589	20630	20548	20789	20748
	10	20590	20631	20549	20790	20749
	15	20591	20632	20550	20791	20750
	30	20592	20633			


Primary conductor	60 x 10 mm 50 x 30 mm
Round conductor	Ø 40 mm
Transformer width	95 mm
Snap-on mounting	—
Sealed shutter	Art.-no. 59044 see page 205
Current transformer for industrial applications	see page 72



EASK 63.6

Plug-in current transformer

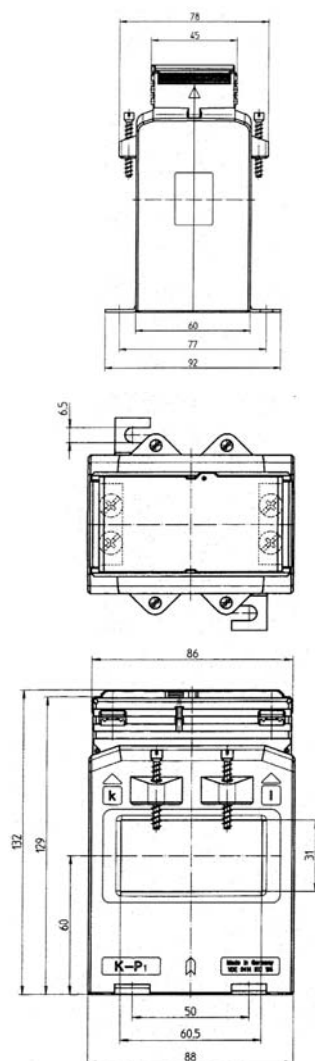Approved current transformer for tariff applications



Secondary current		5A			1A	
Primary current A	Burden VA	Accuracy class			Accuracy class	
		0.5	0.5s	0.2	0.5	0.2
		Art.-no.	Art.-no.	Art.-no.	Art.-no.	Art.-no.
250	2.5	85558	85602	85513	85758	85713
	5	85559	85603		85759	
300	2.5	85560	85604	85515	85760	85715
	5	85561	85605	85516	85761	85716
	10	85562	85606		85762	
400	2.5	85563	85607	85518	85763	85718
	5	85564	85608	85519	85764	85719
	10	85565	85609	85520	85765	85720
500	2.5	85566	85610	85521	85766	85721
	5	85567	85611	85522	85767	85722
	10	85568	85612	85523	85768	85723
	15	85569	85613		85769	
600	2.5	85570	85614	85525	85770	85725
	5	85571	85615	85526	85771	85726
	10	85572	85616	85527	85772	85727
	15	85573	85617	85528	85773	85728
750	5	85574	85618	85530	85774	85730
	10	85575	85619	85531	85775	85731
	15	85576	85620	85532	85776	85732
	30	85577	85621		85777	
1000	5	85578	85622	85534	85778	85734
	10	85579	85623	85535	85779	85735
	15	85580	85624	85536	85780	85736
	30	85581	85625		85781	
1200	5	85582	85626	85538	85782	85738
	10	85583	85627	85539	85783	85739
	15	85584	85628	85540	85784	85740
	30	85585	85629		85785	
1250	5	85586	85630	85542	85786	85742
	10	85587	85631	85543	85787	85743
	15	85588	85632	85544	85788	85744
	30	85589	85633		85789	
1500	5	85590	85634	85546	85790	85746
	10	85591	85635	85547	85791	85747
	15	85592	85636	85548	85792	85748
	30	85593	85637		85793	


Primary conductor	60 x 30 mm
Round conductor	Ø 30 mm
Transformer width	88 mm
Snap-on mounting	–
Sealed shutter	Art.-no. 59042 see page 205
Current transformer for industrial applications	see page 74
Protection plug-in current transformers	see page 152



EASK 81.4

Plug-in current transformer

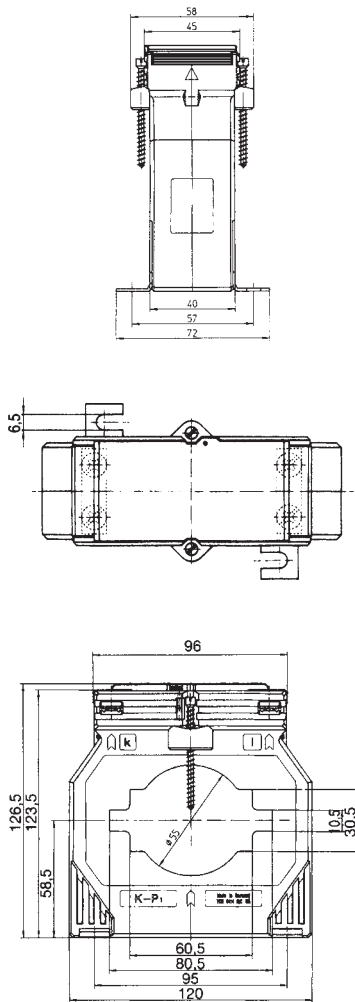Approved current transformer for tariff applications



Secondary current		5A			1A	
Primary current A	Burden VA	Accuracy class			Accuracy class	
		0.5	0.5s	0.2	0.5	0.2
		Art.-no.	Art.-no.	Art.-no.	Art.-no.	Art.-no.
400	2.5	21541	21571	21511	21741	21711
	5	21542	21572	21512	21742	21712
	10	21543	21573		21743	
500	2.5	21544	21574	21514	21744	21714
	5	21545	21575	21515	21745	21715
	10	21546	21576	21516	21746	21716
600	2.5	21547	21577	21517	21747	21717
	5	21548	21578	21518	21748	21718
	10	21549	21579	21519	21749	21719
	15	21550	21580	21520		
750	2.5	21551	21581	21521	21751	21721
	5	21552	21582	21522	21752	21722
	10	21553	21583	21523	21753	21723
	15	21554	21584	21524		
1000	2.5	21555	21585	21525		
	5	21556	21586	21526	21756	21726
	10	21557	21587	21527	21757	21727
	15	21558	21588	21528	21758	
1200	5	21560	21590	21530	21760	21730
	10	21561	21591	21531	21761	21731
	15	21562	21592	21532	21762	
1250	5	21564	21594	21534	21764	21734
	10	21565	21595	21535	21765	21735
	15	21566	21596	21536	21766	21736
1500	2.5	21567	21597	21537		
	5	21568	21598	21538	21768	21738
	10	21569	21599	21539	21769	21739
	15	21570	21600	21540	21770	21740


Primary conductor	80 x 10 mm 60 x 30 mm 2 x 60 x 10 mm
Round conductor	Ø 55 mm
Transformer width	120 mm
Snap-on mounting	—
Sealed shutter	Art.-no. 59042 see page 205
Current transformer for industrial applications	see page 75



Low voltage current transformers for tariff applications

EASK 105.6


Primary conductor
Round conductor
Transformer width



100 x 55 mm
Ø 55 mm
129 mm

EASK 123.3

Primary conductor
Round conductor
Transformer width



123 x 30 mm
3 x 100 x 10 mm
Ø 100 mm
172 mm

EASK 130.3


Primary conductor
Transformer width



130 x 25 mm
180 mm

EASK 130.5

Primary conductor
Transformer width



130 x 30 mm
180 mm


Type "E" denotes that the current transformers are suitable for calibration



EASK 105.6

Plug-in current transformer

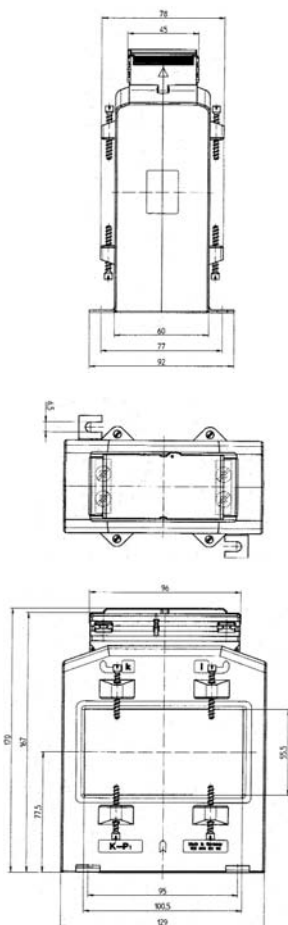Approved current transformer for tariff applications



Secondary current		5A			1A	
Primary current A	Burden VA	Accuracy class			Accuracy class	
		0.5	0.5s	0.2	0.5	0.2
		Art.-no.	Art.-no.	Art.-no.	Art.-no.	Art.-no.
600	2.5	86568	86622	86515	86768	86715
	5	86569	86623	86516	86769	86716
750	2.5	86571	86625	86518	86771	86718
	5	86572	86626	86519	86772	86719
	10	86573	86627	86520	86773	86720
1000	2.5	86574				
	5	86575	86629	86522	86775	86722
	10	86576	86630	86523	86776	86723
	15	86577	86631	86524	86777	86724
1200	5	86579	86633	86526	86779	86726
	10	86580	86634	86527	86780	86727
	15	86581	86635	86528	86781	86728
1250	5	86583	86637	86530	86783	86730
	10	86584	86638	86531	86784	86731
	15	86585	86639	86532	86785	86732
	30	86586	86640		86786	
1500	5	86588	86642	86535	86788	86735
	10	86589	86643	86536	86789	86736
	15	86590	86644	86537	86790	86737
	30	86591	86645	86538	86791	86738
1600	5	86593	86647	86540		
	10	86594	86648	86541	86794	86741
	15	86595	86649	86542	86795	86742
	30	86596	86650	86543	86796	86743
2000	5	86598	86652	86545		
	10	86599	86653	86546	86799	86746
	15	86600	86654	86547	86800	86747
	30	86601	86655	86548	86801	86748
2500	5	86603	86657	86550		
	10	86604	86658	86551	86804	86751
	15	86605	86659	86552	86805	86752
	30	86606	86660	86553	86806	86753
3000	5		86662	86555		
	10	86609	86663	86556	86809	86756
	15	86610	86664	86557	86810	86757
	30	86611	86665	86558	86811	86758


Primary conductor	100 x 55 mm
Round conductor	Ø 55 mm
Transformer width	129 mm
Snap-on mounting	–
Sealed shutter	Art.-no. 59042 see page 205
Current transformer for industrial applications	see page 86
Protection plug-in current transformers	see page 153



EASK 123.3

Plug-in current transformer

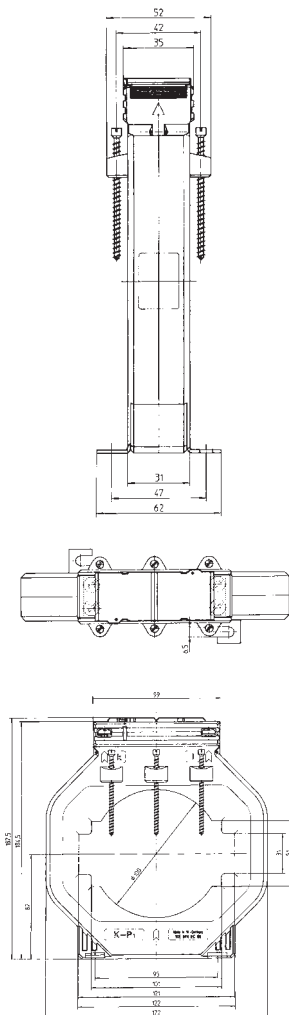Approved current transformer for tariff applications







Secondary current		5A		
Primary current A	Burden VA	Accuracy class		
		0.5	0.5s	0.2
		Art.-no.	Art.-no.	Art.-no.
750	2.5	V56-2301D	V56-2302D	
	5	V56-2301F	V56-2302F	
	10	V56-2301H	V56-2302H	
1000	2.5	V56-2501D	V56-2502D	V56-2503D
	5	V56-2501F	V56-2502F	V56-2503F
	10	V56-2501H	V56-2502H	
1200	5	V56-2601F	V56-2602F	V56-2603F
	10	V56-2601H	V56-2602H	V56-2603H
	15	V56-2601J	V56-2602J	
1250	5	V56-2701F	V56-2702F	V56-2703F
	10	V56-2701H	V56-2702H	V56-2703H
	15	V56-2701J	V56-2702J	V56-2703J
1500	5	V56-2801F	V56-2802F	V56-2803F
	10	V56-2801H	V56-2802H	V56-2803H
	15	V56-2801J	V56-2802J	V56-2803J
	30	V56-2801L	V56-2802L	
1600	5	V56-2901F	V56-2902F	V56-2903F
	10	V56-2901H	V56-2902H	V56-2903H
	15	V56-2901J	V56-2902J	V56-2903J
	30	V56-2901L	V56-2902L	
2000	5	V56-3001F	V56-3002F	V56-3003F
	10	V56-3001H	V56-3002H	V56-3003H
	15	V56-3001J	V56-3002J	V56-3003J
	30	V56-3001L	V56-3002L	
2500	5	V56-3201F	V56-3202F	V56-3203F
	10	V56-3201H	V56-3202H	V56-3203H
	15	V56-3201J	V56-3202J	V56-3203J
	30	V56-3201L	V56-3202L	
3000	5	V56-3301F	V56-3302F	V56-3303F
	10	V56-3301H	V56-3302H	V56-3303H
	15	V56-3301J	V56-3302J	V56-3303J
	30	V56-3301L	V56-3302L	

Primary conductor	120 x 30 mm 3 x 100 x 10 mm
Round conductor	Ø 100 mm
Transformer width	172 mm
Snap-on mounting	—
Sealed shutter	Art.-no. 59040 see page 205
Current transformer for industrial applications	see page 88

EASK 130.3

Plug-in current transformer

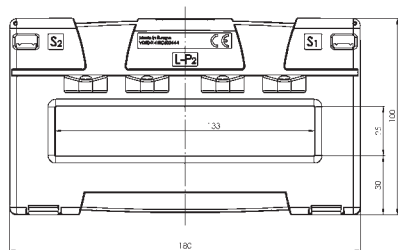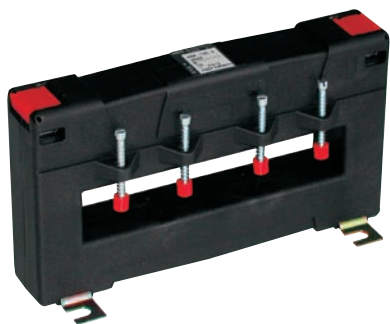Approved current transformer for tariff applications



Secondary current		5A			1A	
Primary current A	Burden VA	Accuracy class			Accuracy class	
		0.5	0.5s	0.2	0.5	0.2
		Art.-no.	Art.-no.	Art.-no.	Art.-no.	Art.-no.
300	2.5	V50-1901D	V50-1902D		V50-1911D	
	5	V50-1901F			V50-1911F	
400	2.5	V50-2001D	V50-2002D	V50-2003D	V50-2011D	V50-2013D
	5	V50-2001F	V50-2002F		V50-2011F	
	10	V50-2001H			V50-2011H	
500	2.5	V50-2101D	V50-2102D	V50-2103D	V50-2111D	V50-2113D
	5	V50-2101F	V50-2102F		V50-2111F	
	10	V50-2101H			V50-2111H	
600	2.5	V50-2201D	V50-2202D	V50-2203D	V50-2211D	V50-2213D
	5	V50-2201F	V50-2202F	V50-2203F	V50-2211F	V50-2213F
	10	V50-2201H			V50-2211H	
750	2.5	V50-2301D	V50-2302D	V50-2303D	V50-2311D	V50-2313D
	5	V50-2301F	V50-2302F	V50-2303F	V50-2311F	V50-2313F
	10	V50-2301H	V50-2302H		V50-2311H	
	15	V50-2301J			V50-2311J	
1000	5	V50-2501F	V50-2502F	V50-2503F	V50-2511F	V50-2513F
	10	V50-2501H	V50-2502H	V50-2503H	V50-2511H	V50-2513H
	15	V50-2501J	V50-2502J		V50-2511J	
1200	5	V50-2601F	V50-2602F	V50-2603F	V50-2611F	V50-2613F
	10	V50-2601H	V50-2602H	V50-2603H	V50-2611H	V50-2613H
	15	V50-2601J	V50-2602J	V50-2603J	V50-2611J	V50-2613J
1250	5	V50-2701F	V50-2702F	V50-2703F	V50-2711F	V50-2713F
	10	V50-2701H	V50-2702H	V50-2703H	V50-2711H	V50-2713H
	15	V50-2701J	V50-2702J	V50-2703J	V50-2711J	V50-2713J
1500	5	V50-2801F	V50-2802F	V50-2803F	V50-2811F	V50-2813F
	10	V50-2801H	V50-2802H	V50-2803H	V50-2811H	V50-2813H
	15	V50-2801J	V50-2802J	V50-2803J	V50-2811J	V50-2813J
	30	V50-2801L			V50-2811L	
1600	5	V50-2901F	V50-2902F	V50-2903F	V50-2911F	V50-2913F
	10	V50-2901H	V50-2902H	V50-2903H	V50-2911H	V50-2913H
	15	V50-2901J	V50-2902J	V50-2903J	V50-2911J	V50-2913J
	30	V50-2901L	V50-2902L		V50-2911L	




Primary conductor	130 x 25 mm
Round conductor	–
Transformer width	180 mm
Snap-on mounting	–
Sealed shutter	–
Current transformer for industrial applications	see page 94



EASK 130.5

Plug-in current transformer

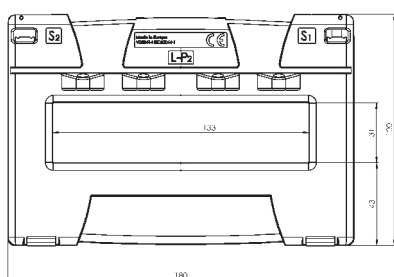Approved current transformer for tariff applications



Primary conductor	130 x 30 mm
Round conductor	–
Transformer width	180 mm
Snap-on mounting	–
Sealed shutter	–
Current transformer for industrial applications	see page 95

Secondary current		5A			1A	
Primary current A	Burden VA	Accuracy class			Accuracy class	
		0.5	0.5s	0.2	0.5	0.2
		Art.-no.	Art.-no.	Art.-no.	Art.-no.	Art.-no.
300	2.5	V51-1901D	V51-1902D		V51-1911D	
	5	V51-1901F	V51-1902F		V51-1911F	
	10	V51-1901H			V51-1911H	
400	2.5	V51-2001D	V51-2002D	V51-2003D	V51-2011D	V51-2013D
	5	V51-2001F	V51-2002F		V51-2011F	
	10	V51-2001H	V51-2002H		V51-2011H	
500	2.5	V51-2101D	V51-2102D	V51-2103D	V51-2111D	V51-2113D
	5	V51-2101F	V51-2102F	V51-2103F	V51-2111F	
	10	V51-2101H	V51-2102H		V51-2111H	
	15	V51-2101J			V51-2111J	
600	2.5	V51-2201D	V51-2202D	V51-2203D	V51-2211D	V51-2213D
	5	V51-2201F	V51-2202F	V51-2203F	V51-2211F	V51-2213F
	10	V51-2201H	V51-2202H		V51-2211H	
	15	V51-2201J			V51-2211J	
750	2.5	V51-2301D	V51-2302D	V51-2303D	V51-2311D	V51-2313D
	5	V51-2301F	V51-2302F	V51-2303F	V51-2311F	V51-2313F
	10	V51-2301H	V51-2302H	V51-2303H	V51-2311H	V51-2313H
	15	V51-2301J	V51-2302J		V51-2311J	
1000	5	V51-2501F	V51-2502F	V51-2503F	V51-2511F	V51-2513F
	10	V51-2501H	V51-2502H	V51-2503H	V51-2511H	V51-2513H
	15	V51-2501J	V51-2502J	V51-2503J	V51-2511J	V51-2513J
	30	V51-2501L	V51-2502L		V51-2511L	
1200	5	V51-2601F	V51-2602F	V51-2603F	V51-2611F	V51-2613F
	10	V51-2601H	V51-2602H	V51-2603H	V51-2611H	V51-2613H
	15	V51-2601J	V51-2602J	V51-2603J	V51-2611J	V51-2613J
	30	V51-2601L	V51-2602L		V51-2611L	
1250	5	V51-2701F	V51-2702F	V51-2703F	V51-2711F	V51-2713F
	10	V51-2701H	V51-2702H	V51-2703H	V51-2711H	V51-2713H
	15	V51-2701J	V51-2702J	V51-2703J	V51-2711J	V51-2713J
	30	V51-2701L	V51-2702L		V51-2711L	
1500	5	V51-2801F	V51-2802F	V51-2803F	V51-2811F	V51-2813F
	10	V51-2801H	V51-2802H	V51-2803H	V51-2811H	V51-2813H
	15	V51-2801J	V51-2802J	V51-2803J	V51-2811J	V51-2813J
	30	V51-2801L	V51-2802L		V51-2811L	
1600	5	V51-2901F	V51-2902F	V51-2903F	V51-2911F	V51-2913F
	10	V51-2901H	V51-2902H	V51-2903H	V51-2911H	V51-2913H
	15	V51-2901J	V51-2902J	V51-2903J	V51-2911J	V51-2913J
	30	V51-2901L	V51-2902L		V51-2911L	
2000	10	V51-3001H	V51-3002H	V51-3003H	V51-3011H	V51-3013H
	15	V51-3001J	V51-3002J	V51-3003J	V51-3011J	V51-3013J
	30	V51-3001L	V51-3002L	V51-3003L	V51-3011L	V51-3013L
2400	10	V51-3101H	V51-3102H	V51-3103H	V51-3111H	V51-3113H
	15	V51-3101J	V51-3102J	V51-3103J	V51-3111J	V51-3113J
	30	V51-3101L	V51-3102L	V51-3103L	V51-3111L	V51-3113L
2500	10	V51-3201H	V51-3202H	V51-3203H	V51-3211H	V51-3213H
	15	V51-3201J	V51-3202J	V51-3203J	V51-3211J	V51-3213J
	30	V51-3201L	V51-3202L	V51-3203L	V51-3211L	V51-3213L
3000	10	V51-3301H	V51-3302H	V51-3303H	V51-3311H	V51-3313H
	15	V51-3301J	V51-3302J	V51-3303J	V51-3311J	V51-3313J
	30	V51-3301L	V51-3302L	V51-3303L	V51-3311L	V51-3313L



Low voltage current transformers for tariff applications

Wound current transformers

EWSK 31.5

Transformer width

70 mm

Summation current transformers

ESUSK 2...8

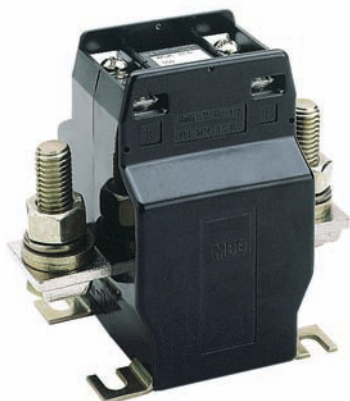
Transformer width

156 mm

Transformer depth

65 mm




Type "E" denotes that the current transformers are suitable for calibration



EWSK 31.5

Wound current transformer

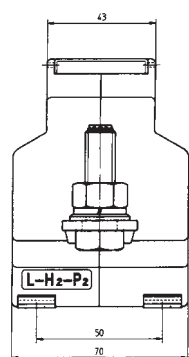Approved current transformer for tariff applications



Secondary current		5A			1A	
Primary current A	Burden VA	Accuracy class			Accuracy class	
		0.5	0.5s	0.2	0.5	0.2
		Art.-no.	Art.-no.	Art.-no.	Art.-no.	Art.-no.
25	2.5	33547	33583	33511	33747	33711
	5	33548	33584	33512	33748	33712
	10	33549	33585	33513	33749	33713
	15	33550	33586		33750	
30	2.5	33551	33587	33515	33751	33715
	5	33552	33588	33516	33752	33716
	10	33553	33589	33517	33753	33717
	15	33554	33590		33754	
40	2.5	33555	33591	33519	33755	33719
	5	33556	33592	33520	33756	33720
	10	33557	33593	33521	33757	33721
	15	33558	33594		33758	
50	2.5	33559	33595	33523	33759	33723
	5	33560	33596	33524	33760	33724
	10	33561	33597	33525	33761	33725
	15	33562	33598		33762	
60	2.5	33563	33599	33527	33763	33727
	5	33564	33600	33528	33764	33728
	10	33565	33601	33529	33765	33729
	15	33566	33602		33766	
75	2.5	33567	33603	33531	33767	33731
	5	33568	33604	33532	33768	33732
	10	33569	33605	33533	33769	33733
	15	33570	33606		33770	
100	2.5	33571	33607	33535	33771	33735
	5	33572	33608	33536	33772	33736
	10	33573	33609	33537	33773	33737
	15	33574	33610		33774	
150	2.5	33575	33611	33539	33775	33739
	5	33576	33612	33540	33776	33740
	10	33577	33613	33541	33777	33741
	15	33578	33614		33778	




Primary conductor	—
Round conductor	—
Transformer width	70 mm
Snap-on mounting	—
Sealed shutter	Art.-no. 59045 see page 205
Current transformer for industrial applications	see page 105



ESUSK 2...8

Summation current transformer

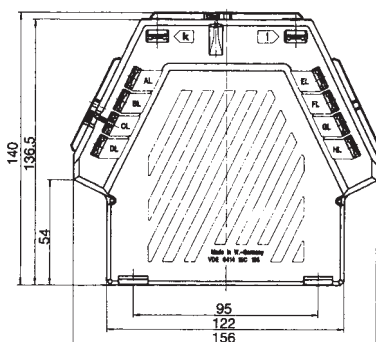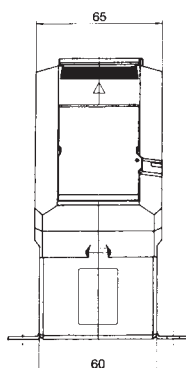Approved current transformer for tariff applications




Secondary current			5A
Type	Primary current A	Burden VA	Accuracy class
			0.2
			Art.-no.
2	5+5	5	40511
		10	40512
3	5+5+5	5	40513
		10	40514
4	5+5+5+5	5	40515
		10	40516
5	5+5+5+5+5	5	40517
		10	40518
6	5+5+5+5+5+5	5	40519
		10	40529
7	5+5+5+5+5+5+5	5	40521
		10	40522
8	5+5+5+5+5+5+5+5	5	40523
		10	40524

Connection example for different ratios:

AK-AL	=	1000/5
BK-BL	=	800/5
CK-CL	=	600/5
DK-DL	=	400/5
EK-EL	=	400/5
FK-FL	=	300/5
GK-GL	=	300/5

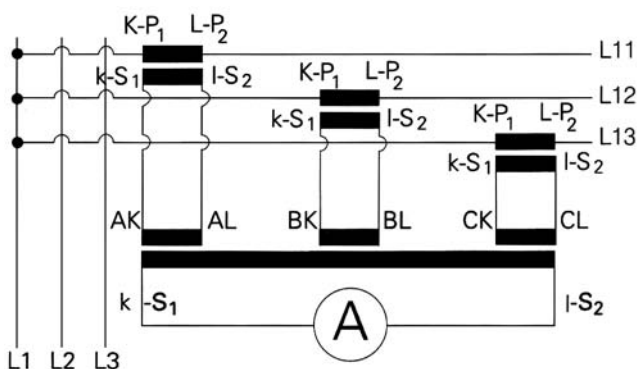Connection diagram



Primary conductor	—
Round conductor	—
Transformer width	65 mm
Transformer depth	156 mm
Snap-on mounting	—
Sealed shutter secondary no.	Art.-no. 59041 (primary) Art.-no. 59042 (secondary) see page 205
Current transformer for industrial applications	see page 115

For technical information, see page 112 and 113.



Low voltage current transformers for tariff applications

Three-phase current transformer sets

EASK(D) 21.3 with Plexiglas caps

EASK(D) 31.5 with Plexiglas caps

EASK(D) 31.5 2U

EASKD 31.8 with Plexiglas caps

EWSKD 31.8




EASK(D) 21.3

Three-phase current transformer set

Approved current transformer for tariff applications

Secondary current		5A			1A	
Primary current A	Burden VA	Accuracy class			Accuracy class	
		0.5	0.5s	0.2	0.5	0.2
		Art.-no.	Art.-no.	Art.-no.	Art.-no.	Art.-no.
3 x 100	2.5	58529	58547		58747	
3 x 150	2.5	58532	58550	58514	58750	58714
	5	58533	58551		58751	
3 x 200	2.5	58535	58553	58517	58753	58717
	5	58536	58554	58518	58754	58718

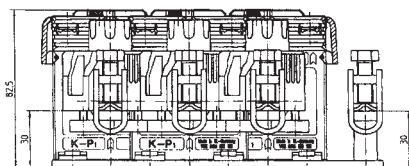

Configuration:

The measuring transformer set consists of 3 individual current transformers which are mounted on an aluminium base plate together with the primary conductors L₁, L₂, L₃ and neutral conductor.

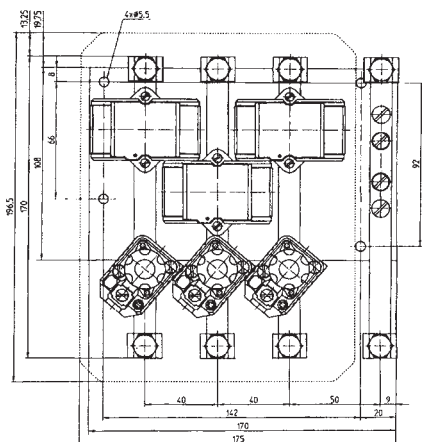
The current transformer set can be supplied with or without fuses. The voltage supply is optional and can be tapped either from the 10 A-NEOZED fuse or from the individual primary conductors.

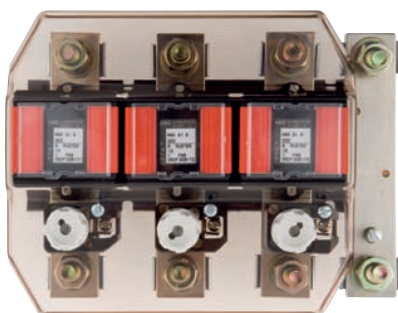
Transparent, sealable covers protect the secondary terminals of the current transformers against external tampering. All voltage carrying parts of the assembled current transformer set are made shock-proof with isolating covers which are included in the deliveries.

Flexible copper wire with a nominal cross section of 16 mm² up to 70 mm² can be connected to the primary connection terminals.

The configuration of this current transformer set conforms to the technical requirements and guidance:

DIN EN 60044/1
DIN 42600
VBG 4






EASK(D) 31.5

Three-phase current transformer set

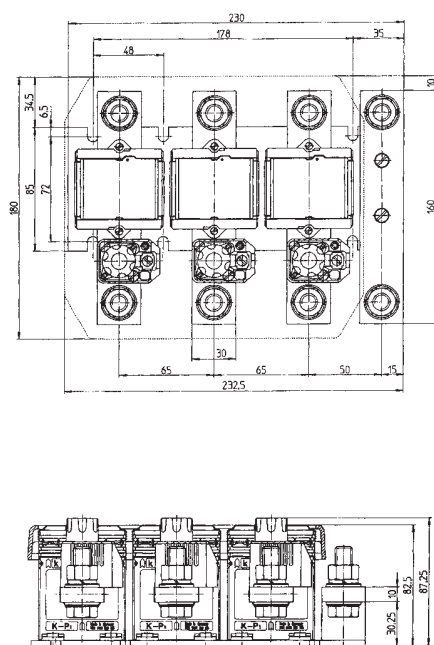Approved current transformer for tariff applications



Technical description see page 160.

Secondary current		5A			1A	
Primary current A	Burden VA	Accuracy class			Accuracy class	
		0.5	0.5s	0.2	0.5	0.2
		Art.-no.	Art.-no.	Art.-no.	Art.-no.	Art.-no.
3 x 75	2.5	57543	57575		57743	
	5	57544	57576	57512	57744	57712
3 x 100	2.5	57545			57745	
	5	57546	57578	57514	57746	57714
3 x 150	2.5	57547	57579	57515	57747	57715
	5	57548	57580	57516	57748	57716
3 x 200	2.5	57549	57581	57517	57749	57717
	5	57550	57582		57750	
3 x 250	2.5	57551	57583	57519	57751	57719
	5	57552	57584	57520	57752	57720
3 x 300	2.5	57553	57585	57521	57753	57721
	5	57554	57806		57754	
3 x 400	2.5	57555	57586	57523	57755	57723
	5	57556	57587	57524	57756	57724
3 x 500	2.5	57557	57588	57525	57757	57725
	5	57558	57805		57758	
3 x 600	2.5	57559	57589	57527	57759	57727
	5	57560	57590	57528	57760	57728
3 x 750	2.5	57561	57591	57529	57761	57729
	5	57562	57592		57762	
3 x 1000	2.5	57563	57593	57531	57763	57731
	5	57564	57594	57532	57764	57732
3 x 1500	2.5	57565	57595	57533	57765	57733
	5	57566	57596		57766	
3 x 2000	2.5	57567	57597	57535	57767	57735
	5	57568	57598	57536	57768	57736
3 x 3000	2.5	57569	57599	57537	57769	57737
	5	57570	57600		57770	
3 x 4000	2.5	57571	57601	57539	57771	57739
	5	57572	57602	57540	57772	57740
3 x 5000	2.5	57573	57603	57541	57773	57741
	5	57574	57604	57542	57774	57742

EASK(D) 31.5 2U




Secondary current		5A	
Primary current A	Burden VA	Accuracy class	
		0.5	0.5s
		Art.-no.	Art.-no.
3x200-100	5-2.5	57605	57615
	10-5	57606	
3x300-150	5-2.5	57607	57617
	10-5	57608	57618
3x400-200	5-2.5	57609	57619
	10-5	57610	57620
3x500-250	5-2.5	57611	57621
	10-5	57612	57622
3x600-300	5-2.5	57613	57623
	10-5	57614	57624

EWSKD 31.8


Three-phase current transformer set

Approved current transformer for tariff applications

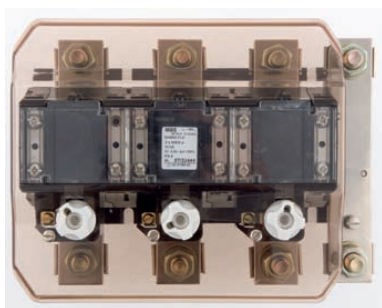with base plate



without base plate and neutral conductor



Secondary current		5A			1A	
Primary current A	Burden VA	Accuracy class			Accuracy class	
		0.5	0.5s	0.2	0.5	0.2
		Art.-no.	Art.-no.	Art.-no.	Art.-no.	Art.-no.
3 x 50	2.5	44561	44601	44511	44761	44711
	5	44562	44602	44512	44762	44712
	10	44563	44603		44763	
3 x 75	2.5	44565	44605	44515	44765	44715
	5	44566	44606	44516	44766	44716
	10	44567	44607		44767	
3 x 100	2.5	44569	44609	44519	44769	44719
	5	44570	44610	44520	44770	44720
	10	44571	44611		44771	
3 x 150	2.5	44573	44613	44523	44773	44723
	5	44574	44614	44524	44774	44724
	10	44575	44615	44525	44775	44725




Secondary current		5A			1A	
Primary current A	Burden VA	Accuracy class			Accuracy class	
		0.5	0.5s	0.2	0.5	0.2
		Art.-no.	Art.-no.	Art.-no.	Art.-no.	Art.-no.
3 x 50	2.5	45561	45601	45511	45761	45711
	5	45562	45602	45512	45762	45712
	10	45563	45603		45763	
3 x 75	2.5	45565	45605	45515	45765	45715
	5	45566	45606	45516	45766	45716
	10	45567	45607		45767	
3 x 100	2.5	45569	45609	45519	45769	45719
	5	45570	45610	45520	45770	45720
	10	45571	45611		45771	
3 x 150	2.5	45573	45613	45523	45773	45723
	5	45574	45614	45524	45774	45724
	10	45575	45615	45525	45775	45725

EASKD 31.8

Three-phase current transformer set


Approved current transformer for tariff applications

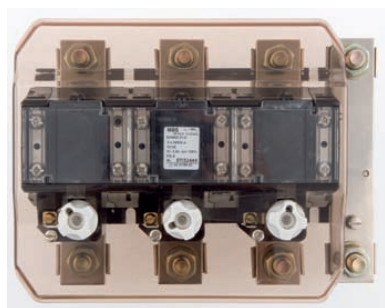with base plate



Secondary current		5A			1A	
Primary current A	Burden VA	Accuracy class			Accuracy class	
		0.5	0.5s	0.2	0.5	0.2
		Art.-no.	Art.-no.	Art.-no.	Art.-no.	Art.-no.
3 x 200	2.5	46577	46617	46527	46777	46727
	5	46578	46618	46528	46778	46728
	10	46579	46619	46529	46779	46729
3 x 250	2.5	46581	46621	46531	46781	46731
	5	46582	46622	46532	46782	46732
	10	46583	46623	46533	46783	46733
3 x 300	2.5	46585	46625	46535	46785	46735
	5	46586	46626	46536	46786	46736
	10	46587	46627	46537	46787	46737
	15	46588	46628		46788	
3 x 400	2.5	46589	46629	46539	46789	46739
	5	46590	46630	46540	46790	46740
	10	46591	46631	46541	46791	46741
	15	46592	46632	46542	46792	46742
3 x 500	2.5	46593	46633	46543	46793	46743
	5	46594	46634	46544	46794	46744
	10	46595	46635	46545	46795	46745
	15	46596	46636	46546	46796	46746
3 x 600	2.5	46597	46637	46547	46797	46747
	5	46598	46638	46548	46798	46748
	10	46599	46639	46549	46799	46749
	15	46600	46640	46550	46800	46750

without base plate and neutral conductor



Secondary current		5A			1A	
Primary current A	Burden VA	Accuracy class			Accuracy class	
		0.5	0.5s	0.2	0.5	0.2
		Art.-no.	Art.-no.	Art.-no.	Art.-no.	Art.-no.
3 x 200	2.5	47577	47617	47527	47777	47727
	5	47578	47618	47528	47778	47728
	10	47579	47619	47529	47779	47729
3 x 250	2.5	47581	47621	47531	47781	47731
	5	47582	47622	47532	47782	47732
	10	47583	47623	47533	47783	47733
3 x 300	2.5	47585	47625	47535	47785	47735
	5	47586	47626	47536	47786	47736
	10	47587	47627	47537	47787	47737
	15	47588	47628		47788	
3 x 400	2.5	47589	47629	47539	47789	47739
	5	47590	47630	47540	47790	47740
	10	47591	47631	47541	47791	47741
	15	47592	47632	47542	47792	47742
3 x 500	2.5	47593	47633	47543	47793	47743
	5	47594	47634	47544	47794	47744
	10	47595	47635	47545	47795	47745
	15	47596	47636	47546	47796	47746
3 x 600	2.5	47597	47637	47547	47797	47747
	5	47598	47638	47548	47798	47748
	10	47599	47639	47549	47799	47749
	15	47600	47640	47550	47800	47750



Accessories for low voltage current transformers

Snap-on mountings

Copper tubes

Mounting angle

Mounting kit


Secondary cap

Locking pistons

Sealed shutters

Copper bus bars

Snap-on mountings



Snap-on mounting for tube-, plug-in, protection- and tariff transformers	
For use with MBS current transformers	Art.-no.
ASR 22.3; ASK 21.3; 31.3; 318.3; 41.3; WSK 30	53011
ASK 31.4	54011
ASK 31.5; WSK 40 N	55011
ASK 41.4; 412.4; WSK 40	55012
ASR 14.3; 20.3; 201.3	55013
ASK 21.3; ASK 205.3	55014

Copper tubes




Copper tube				
Length	Outside Ø	Inner Ø	Max. current	Art.-no.
34	22.5	16.5	600 A	52011
36	22.5	16.5	600 A	52012
different lengths available upon request				
34	22.5	12.5	600 A	52021
36	22.5	12.5	600 A	52022
different lengths available upon request				
34	22.5	8.5	600 A	52031
36	22.5	8.5	600 A	52032
different lengths available upon request				
32	21	12.5	600 A	52041
34	21	12.5	600 A	52042
different lengths available upon request				
32	21	8.5	600 A	52051
34	21	8.5	600 A	52052
different lengths available upon request				

Mounting angle for 3-phase current transformer set



Mounting angle for triple set (2 pcs) plug-in, protection- and tariff transformers	
For use with MBS current transformers	Art.-no.
ASK 421.4; 41.4; 412.4; WSK 40; WSK 40 N	59037
ASK 41.5	59082

Mounting kit



Mounting kit	
Screw M 12 x 40	Art.-no.
with voltage taps M5	59026
with voltage taps M5 and locking piston bus bar 30 mm	59027
with voltage taps M5 and locking piston bus bar 40 mm	59030
with voltage taps M5 and locking piston bus bar 50 mm	59081
standard	59028
standard with locking piston bus bar 30 mm	59029
standard with locking piston bus bar 40 mm	59030A
standard with locking piston bus bar 50 mm	59080

Secondary cap



Secondary cap
Art.-no.
53016

Locking pistons



	Dimensions [mm]			Art.-no.
copper bus bar	30 x 6	30 x 8	30 x 10	59035
copper bus bar	40 x 6	40 x 8	40 x 10	59036
copper bus bar	50 x 6	50 x 8	50 x 10	59048


Sealed shutters




Sealed shutter for tube-, plug-in, protection- and tariff current transformers	
For use with MBS current transformers	Art.-no.
ASR 22.3; ASK 21.3; 31.3; 318.3; 41.3; 103.3 (2x); 123.3 (2x)	59040
ASK 31.4; 31.5; 421.4; 41.4; 412.4; WSK 40; 60; WSK 40 N; KSU	59041
ASK 541.4; 51.4; 561.4; 61.4; 63.4; 63.6; 81.4; 101.4	59042
ASK 105.6; 105.6N; 127.4; 127.6; 128.4; 129.10	59042
WSK 70.6	59043
ASK 31.6; 41.6; 51.6; 61.6	59044
WSK 31.5	59045

Copper bus bars
















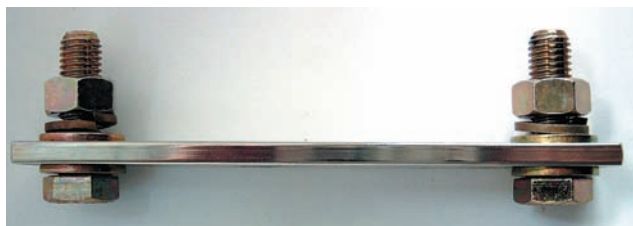
galvanically nickel-plated



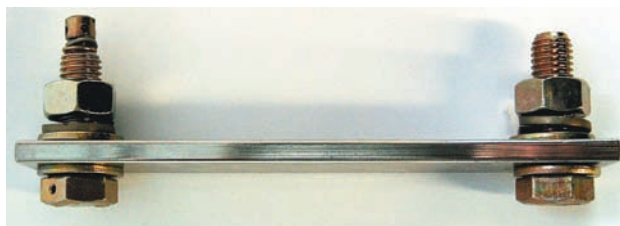Copper bus bar for current transformers for industrial applications



Copper bus bar for current transformers for tariff applications



Material E-CU copper plated
acc. to DIN 46433

Copper bus bars

Art.-no.	Configuration	Bores	Length	Width	Thickness	Max. current
020060170B003I	industry	3	170	20	6	300 A
020060170B003IO	w/o screws	3	170	20	6	300 A
030060130B006I	industry	6	130	30	6	300 A
030060130B006E	energy supplier	6	130	30	6	300 A
030060130B006IO	w/o screws	6	130	30	6	300 A
030060140B006I	industry	6	140	30	6	300 A
030060140B006E	energy supplier	6	140	30	6	300 A
030060140B006IO	w/o screws	6	140	30	6	300 A
030080130B006I	industry	6	130	30	8	400 A
030080130B006E	energy supplier	6	130	30	8	400 A
030080130B006IO	w/o screws	6	130	30	8	400 A
030080160B006I	industry	6	160	30	8	400 A
030080160B006E	energy supplier	6	160	30	8	400 A
030080160B006IO	w/o screws	6	160	30	8	400 A
030100130B006I	industry	6	130	30	10	750 A
030100130B006E	energy supplier	6	130	30	10	750 A
030100130B006IO	w/o screws	6	130	30	10	750 A
030100140B006I	industry	6	140	30	10	750 A
030100140B006E	energy supplier	6	140	30	10	750 A
030100140B006IO	w/o screws	6	140	30	10	750 A
030100160B006I	industry	6	160	30	10	750 A
030100160B006E	energy supplier	6	160	30	10	750 A
030100160B006IO	w/o screws	6	160	30	10	750 A
040060140B008I	industry	8	140	40	6	500 A
040060140B008E	energy supplier	8	140	40	6	500 A
040060140B008IO	w/o screws	8	140	40	6	500 A
040060160B008I	industry	8	160	40	6	500 A
040060160B008E	energy supplier	8	160	40	6	500 A
040060160B008IO	w/o screws	8	160	40	6	500 A
040100140B008I	industry	8	140	40	10	800 A
040100140B008E	energy supplier	8	140	40	10	800 A
040100140B008IO	w/o screws	8	140	40	10	800 A
040100160B008I	industry	8	160	40	10	800 A
040100160B008E	energy supplier	8	160	40	10	800 A
040100160B008IO	w/o screws	8	160	40	10	800 A
050100140B010I	industry	10	140	50	10	1000 A
050100140B010E	energy supplier	10	140	50	10	1000 A
050100140B010IO	w/o screws	10	140	50	10	1000 A
050100180B010I	industry	10	180	50	10	1000 A
050100180B010E	energy supplier	10	180	50	10	1000 A
050100180B010IO	w/o screws	10	180	50	10	1000 A
050100220B011I	industry	11	220	50	10	1000 A
050100220B011E	energy supplier	11	220	50	10	1000 A
050100220B011IO	w/o screws	11	220	50	10	1000 A
060100180B012I	industry	12	180	60	10	1200 A
060100180B012E	energy supplier	12	180	60	10	1200 A
060100180B012IO	w/o screws	12	180	60	10	1200 A
060100220B013I	industry	13	220	60	10	1200 A
060100220B013E	energy supplier	13	220	60	10	1200 A
060100220B013IO	w/o screws	13	220	60	10	1200 A
080100240B014I	industry	14	240	80	10	1500 A
080100240B014E	energy supplier	14	240	80	10	1500 A
080100240B014IO	w/o screws	14	240	80	10	1500 A
100100240B015I	industry	15	240	100	10	2000 A
100100240B015E	energy supplier	15	240	100	10	2000 A
100100240B015IO	w/o screws	15	240	100	10	2000 A

Primary bus bars – delivery content:

energy suppliers = with 1 off each mounting kit, nos. 59026 and 59028

industry = with 2 mounting kits, no. 59028

w/o = without screws

additional lengths and special bores upon request.



Bus bar isolators / Bus bar supports

DB/P **Spacing isolators**
C0/P
CS/P
CT/P
CPE

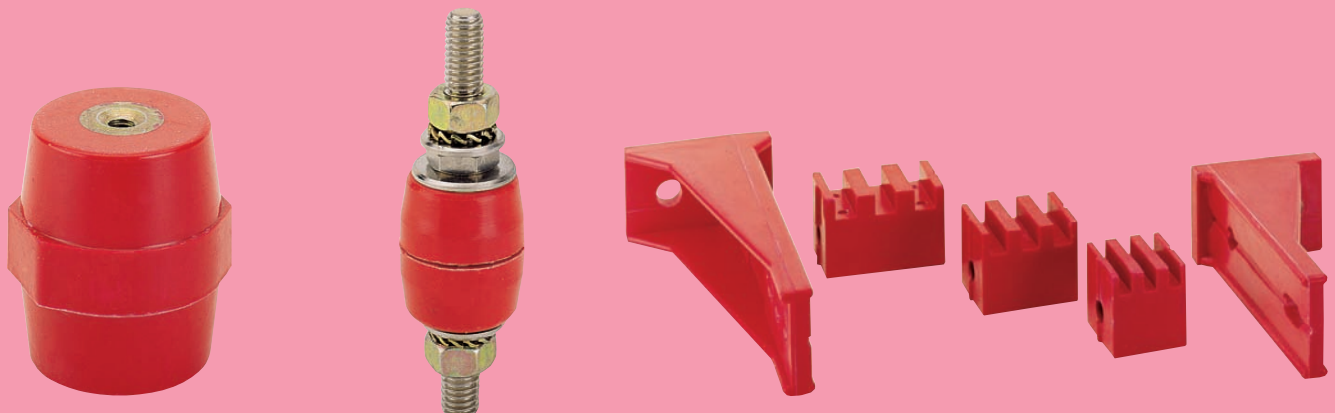
PI/P **Passing isolators**

PSB **Vertical bus bar supports**


GB **Mounting material**
Threaded bolts

SK **Hexagon spacers in brass**

Bus bar supports
Bus bar supports L-profile
Bus bar supports Z-profile



Spacing isolator type DB/P

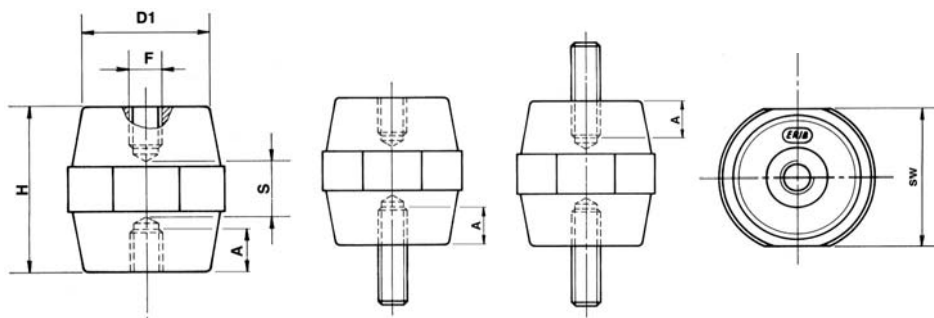

art.-no. XXXXX
e.g. 90015

art.-no. XXXXX-1
e.g. 90015-1

art.-no. XXXXX-2
e.g. 90015-2

DB/P

Made of Polyglas-polyester material, reinforced with fibreglass, colour red, self extinguishing. The isolators of type DB are unbreakable and have excellent electrical and mechanical characteristics and can be used under extreme working conditions such as high room temperatures, also when in contact with corrosive substances, vibrations, etc. The hexagon, arranged middle layer with two facing sides, facilitates the connection and locking in place the isolator. Upon request, the isolators can be supplied as follows:

- The isolator can be equipped with a thread which is not standard
- The isolator can be supplied with one or two threaded bolts "GB"

Operating temperature:
-40 °C to +130 °C

Fire resistance:
class: UL94-VO

Art.-no.	Packaging-unit	Article-group	Article	H (mm)	sw* (mm)	D1 (mm)	Operating voltage	M (thread)	A (mm)	Colour
90015	100	DB	12/P	12	11	10	220	M3	3	■
90018	100	DB	12/P	12	11	10	220	M4	3	■
90022	100	DB	16/P	16	14	13	380	M4	4	■
90025	100	DB	20/P	20	17	15	500	M4	6	■
90026	100	DB	20/P	20	17	15	500	M6	6	■
90028	250	DB	25/P	25	19	15	600	M6	7	■
90029	250	DB	25/P	25	19	15	600	M5	7	■
90030	250	DB	25/P	25	19	15	600	M6	7	■
90033	80	DB	30/P	30	30	26	600	M6	8	■
90034	80	DB	30/P	30	30	26	600	M8	7	■
90035	64	DB	34/P	35	32	28	1000	M6	9	■
90036	64	DB	34/P	35	32	28	1000	M8	10	■
90037	64	DB	34/P	35	32	28	1000	M10	10	■
90038	36	DB	35/P	35	41	35	1000	M6	9	■
90039	36	DB	35/P	35	41	35	1000	M8	9	■
90040	36	DB	35/P	35	41	35	1000	M10	10	■
90438	100	DB	40/P	40	40	30	1000	M8	11	■
90439	100	DB	40/P	40	40	30	1000	M10	12	■
90440	100	DB	40/P	40	40	30	1000	M12	10	■
90041	27	DB	45/P	45	41	35	1500	M6	12	■
90042	27	DB	45/P	45	41	35	1500	M8	12	■
90043	27	DB	45/P	45	41	35	1500	M10	12	■
90044	27	DB	45/P	45	41	35	1500	M12	12	■
90046	36	DB	50/P	50	36	29	2000	M8	12	■
90047	36	DB	50/P	50	36	29	2000	M10	12	■
90048	36	DB	50/P	50	36	29	2000	M12	13	■
90441	25	DB	60/P	60	55	40	2000	M8	20	■
90442	25	DB	60/P	60	55	40	2000	M10	21	■
90443	25	DB	60/P	60	55	40	2000	M12	20	■
90050	22	DB	65/P	63.5	41	35	3000	M8	17	■
90051	22	DB	65/P	63.5	41	35	3000	M10	19	■
90052	22	DB	65/P	63.5	41	35	3000	M12	19	■
90053	12	DB	75/P	76	50	36	5000	M8	19	■
90054	12	DB	75/P	76	50	36	5000	M10	19	■
90055	12	DB	75/P	76	50	36	5000	M12	19	■
90057	8	DB	750/P	75	65	52	5000	M12	18	■
90058	8	DB	750/P	75	65	52	5000	M16	23	■

* sw = screw wide


For mounting and
assembly material
see page 217.

Spacing isolator type DB/P


		DB16P	DB 20/P	DB 25/P	DB 30/P	DB 34/P	DB 35/P	DB45/P	DB 50/P	DB 65/P	DB 75/P	DB 750/P
resistance voltage tracking	[kV]	3	4	7	8	10	10	12	12	15	25	25
discharge voltage	[kV]	8	15	20	23	30	30	40	40	40	50	50
max. tensile load	fz [kIM]	1	1.5	3	5	8	11	12	8.5	15	23	28
max. bending load	fb [kIM]	0.5	0.6	1.8	2.5	4.5	8	8	4.5	7	9	15
max. compression load	fd [kIM]	5	6	21	44	65	80	80	68	83	100	150
max. starting torque	md [Nm]	0.4	0.4	3	3	5	9	10	5	6	10	13

The types DB ..., CO/P..., CS/P..., CT/P... and CPE ... have been tested for insulating material (discharge voltage, discharge strength and arking) according to the regulations covering VDE 0303 part 2 blueprint march 1987. Appraisal of the discharge voltage or arking between two unequal electrodes/diameter (25 mm or 75 mm). The test was made for the norm climate 23/50, ambient temperature $(23 \pm 2)^\circ\text{C}$ and $(50 \pm 5) \%$ relative humidity.

Spacing isolator type CO/P – 20 mm dia.



Spacing isolator type CS/P – 30 mm dia.

**CO/P – diameter 20 mm**

Made of Polyglass-Polyester material, reinforced fibre glass, colour red, self extinguishing. Upon request the isolators type CO/P, can be supplied with 1 or 2 mounting materials, type GB, fitted and secured with lock tide.

Art.-no.	Packaging-unit	Article group	Article	H (mm)	D (mm)	Operating voltage	M (thread)	A (mm)
90061	200	CO/P	16	16	20	220	M4	4
90062	200	CO/P	16	16	20	220	M5	4
90063	100	CO/P	16	16	20	220	M6	4
90064	150	CO/P	16	16	20	220	M8	4
90065	200	CO/P	20	20	20	400	M5	5
90066	100	CO/P	20	20	20	400	M6	5
90067	200	CO/P	20	20	20	400	M8	5
90068	150	CO/P	25	25	20	500	M5	6
90069	150	CO/P	25	25	20	500	M6	6
90070	150	CO/P	25	25	20	500	M8	6
90071	140	CO/P	30	30	20	600	M5	7
90072	140	CO/P	30	30	20	600	M6	7
90073	140	CO/P	30	30	20	600	M8	7
90075	120	CO/P	35	35	20	600	M6	7
90077	110	CO/P	40	40	20	600	M6	9
90078	110	CO/P	40	40	20	600	M8	10
90079	100	CO/P	45	45	20	750	M6	9
90080	100	CO/P	45	45	20	750	M8	10
90081	80	CO/P	50	50	20	750	M6	10
90082	80	CO/P	50	50	20	750	M8	10
90083	70	CO/P	60	60	20	750	M6	9
90084	70	CO/P	60	60	20	750	M8	9

CS/P – diameter 30 mm

Made of Polyglass-Polyester material, reinforced fibre glass, colour red, self extinguishing.


Art.-no.	Packaging-unit	Article group	Article	H (mm)	D (mm)	Operating voltage	M (thread)	A (mm)
90087	80	CS/P	30	30	30	750	M6	9
90088	80	CS/P	30	30	30	750	M8	9
90089	80	CS/P	30	30	30	750	M10	9
90090	64	CS/P	35	35	30	1000	M6	9
90091	64	CS/P	35	35	30	1000	M8	9
90092	64	CS/P	35	35	30	1000	M10	9
90093	60	CS/P	40	40	30	1000	M6	12
90094	60	CS/P	40	40	30	1000	M8	12
90095	60	CS/P	40	40	30	1000	M10	12
90096	48	CS/P	45	45	30	1000	M6	12
90097	48	CS/P	45	45	30	1000	M8	12
90098	48	CS/P	45	45	30	1000	M10	13
90099	48	CS/P	50	50	30	1500	M6	12
90100	48	CS/P	50	50	30	1500	M8	13
90101	48	CS/P	50	50	30	1500	M10	12
90102	40	CS/P	55	55	30	1500	M6	12
90103	40	CS/P	55	55	30	1500	M8	11
90105	40	CS/P	60	60	30	1500	M6	12
90106	40	CS/P	60	60	30	1500	M8	16
90107	40	CS/P	60	60	30	1500	M10	20
90109	32	CS/P	65	65	30	1500	M8	18
90111	32	CS/P	70	70	30	1500	M6	14
90112	32	CS/P	70	70	30	1500	M8	18
90113	32	CS/P	70	70	30	1500	M10	18

Spacing isolators type CO/P, CS/P, CT/P, CPE


Operating temperature -40 °C up to +130 °C

Fire resistance class UL94-VO

Spacing isolator type CT/P – 40 mm dia.



Spacing isolator type CPE – 60 mm dia.

**CT/P – diameter 40 mm**

Made of Polyglass-Polyester material, reinforced fibre glass, colour red, self extinguishing.

CPE – diameter 60 mm


Made of Polyglass-Polyester material, reinforced fibre glass, colour red, self extinguishing.

Art.-no.	Packaging-unit	Article group	Article	H (mm)	D (mm)	Operating voltage	M (thread)	A (mm)
90118	45	CT/P	30	30	40	750	M8	8
90119	45	CT/P	30	30	40	750	M10	9
90120	36	CT/P	35	35	40	750	M8	9
90121	36	CT/P	35	35	40	750	M10	9
90122	27	CT/P	40	40	40	1000	M8	12
90123	27	CT/P	40	40	40	1000	M10	12
90123M12	27	CT/P	40	40	40	1000	M12	12
90124	27	CT/P	45	45	40	1000	M8	13
90125	27	CT/P	45	45	40	1000	M10	12
90126	27	CT/P	50	50	40	1500	M8	12
90127	27	CT/P	50	50	40	1500	M10	13
90127M12	27	CT/P	50	50	40	1500	M12	11
90129	18	CT/P	55	55	40	1500	M10	12
90130	18	CT/P	60	60	40	1500	M8	18
90131	18	CT/P	60	60	40	1500	M10	18
90131M12	18	CT/P	60	60	40	1500	M12	18
90133	18	CT/P	65	65	40	1500	M10	18
90134	18	CT/P	70	70	40	1500	M8	18
90135	18	CT/P	70	70	40	1500	M10	18

Art.-no.	Packaging-unit	Article group	Article	H (mm)	D (mm)	Operating voltage	M (thread)	A (mm)
90140	12	CPE	40	40	60	1500	M10	11
90141	12	CPE	40	40	60	1500	M12	11
90142	12	CPE	40	40	60	1500	M16	12
90143	10	CPE	60	60	60	3000	M10	18
90144	10	CPE	60	60	60	3000	M12	18
90145	10	CPE	60	60	60	3000	M16	19
90146	8	CPE	80	80	60	5000	M10	19
90147	8	CPE	80	80	60	5000	M12	19
90148	8	CPE	80	80	60	5000	M16	23
90149	5	CPE	100	100	60	8000	M10	19
90150	5	CPE	100	100	60	8000	M12	19
90151	5	CPE	100	100	60	8000	M16	23


	CS/P 30	CS/P 40	CS/P 50	CS/P 60	CT/P 30	CT/P 40	CT/P 50	CT/P 60	CPE 40	CPE 60	CPE 80	CPE 100	CO/P 30	CO/P 40	CO/P 50	CO/P 60
resistance voltage tracking [kV]	8	8	10	15	8	10	10	10	10	20	25	30	5	8	10	10
discharge voltage [kV]	20	25	35	35	20	25	35	35	25	50	50	50	15	20	25	30
max. tensile load FZ [kN]	9	9	9	9	10	10	10	10	11	15	23	30	4	4	4	4
max. bending load FB [kN]	4.5	3	2	1.5	7.5	7	5	3.7	7	5	9	15	2	1.5	1	1
max. compression load FD [kN]	40	40	40	40	80	80	80	80	100	100	120	150	21	21	21	21
max. starting torque MD [Nm]	1.3...2.6	1.3...2.6	1.3...2.6	1.3...2.6	3.0...6.0	3.0...6.0	3.0...6.0	3.0...6.0	6	8	10	15	1.0...2.0	1.0...2.0	1.0...2.0	1.0...2.0

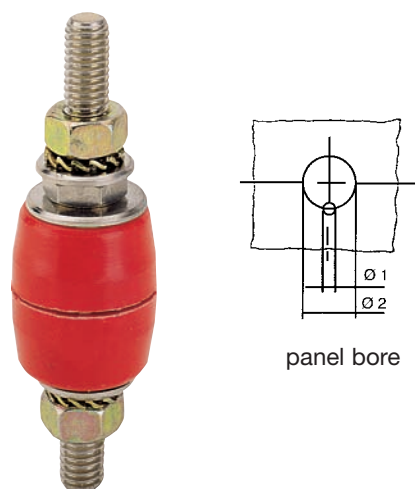Passing isolators type PI/P




panel bore

Art.-no.	Packaging-unit	Article group	Article	H (mm)	D (mm)	Operating voltage	M (thread)
90166	60	PI/P	4	50	15	600	M4
90167	40	PI/P	6	65	22	1000	M6
90168	25	PI/P	8	80	25	1000	M8
90169	20	PI/P	10	95	30	1000	M10
90170	15	PI/P	12	105	35	1000	M12
90171	8	PI/P	16	135	43	2000	M16
90172	4	PI/P	20	155	54	2000	M20

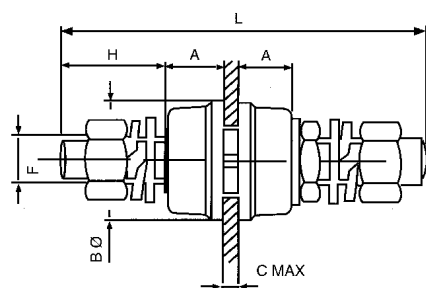

Passing isolator type PI/P
Polyester material, red

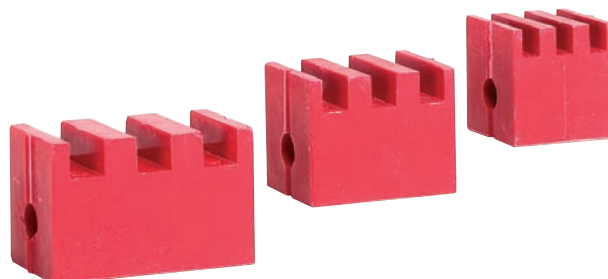Vertical bus bar support type PSB




Easy to assemble vertical bus bar support in Polyester material with reinforced fibre glass, red, suitable for bus bars with dimensions between 40 x 60 mm and 120 x 10 mm.

Due to its construction characteristics this bus bar support is suitable for special isolating and mechanical resistance requirements.


For the assembly of a bus bar support the following parts are required:

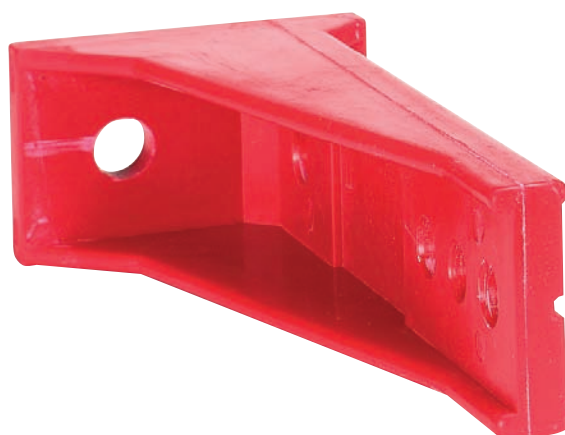1 or 2 lateral supports, 2 mounting screws and the necessary block number to clamp into place the required bus bars.




PSB/1

lateral support




PSB/6

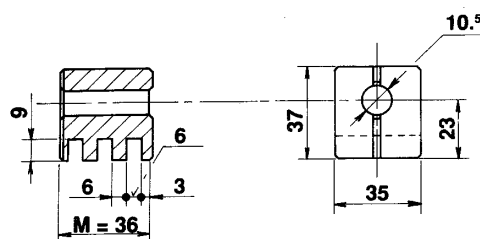block for 6 mm bus bar




PSB/2

lateral support




PSB/8

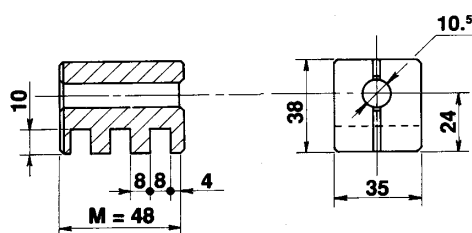block for 8 mm bus bar




PSB/120

lateral support



PSB/10

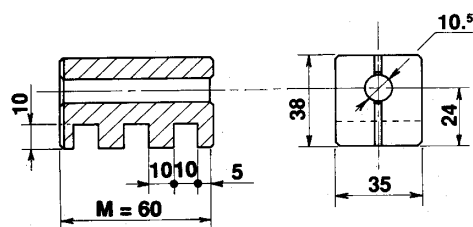block for 10 mm bus bar



Lateral support	Blocks	Bus bars	Art.-no.
PSB/1	PSB 6 60 x 6	80 x 6 100 x 6	
	PSB 8 60 x 8	80 x 8 100 x 8	90175*
	PSB 10 60 x 10	80 x 10 100 x 10	
PSB/2	PSB 6 40 x 6	50 x 6	
	PSB 8 40 x 8	50 x 8	90176*
	PSB 10 40 x 10	50 x 10	
PSB/120	PSB 6 120 x 6		
	PSB 8 120 x 8		90177*
	PSB 10 120 x 10		

Elastic deviation of the teeth with signs of rupture	Pack.	Art.-no.
PSB/6 kg 950	36	90178*
PSB/8 kg 1130	30	90179*
PSB/10 kg 1375	24	90180*

* = storage parts

Operating voltage 1000 V AC


Operating temperature $-40^{\circ}\text{C} \leq \vartheta \leq +130^{\circ}\text{C}$

Fire resistance class UL94-VO

Vertical bus bar support PSB

illustration 1

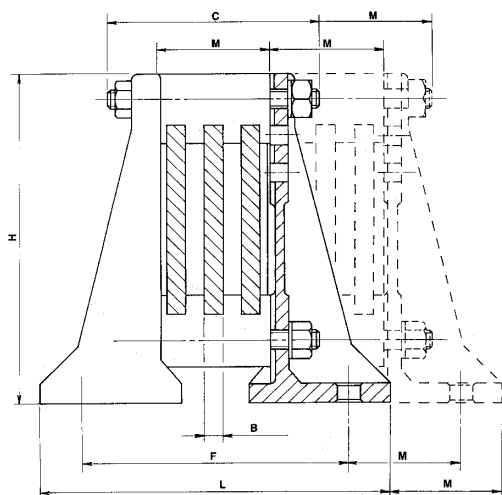
example of a unipolar bus bar support with 3 parallel bus bar support holders



A = number of blocks
B = bus bar thickness
C = length of mounting screw

L = external space requirement
H = height
M = module

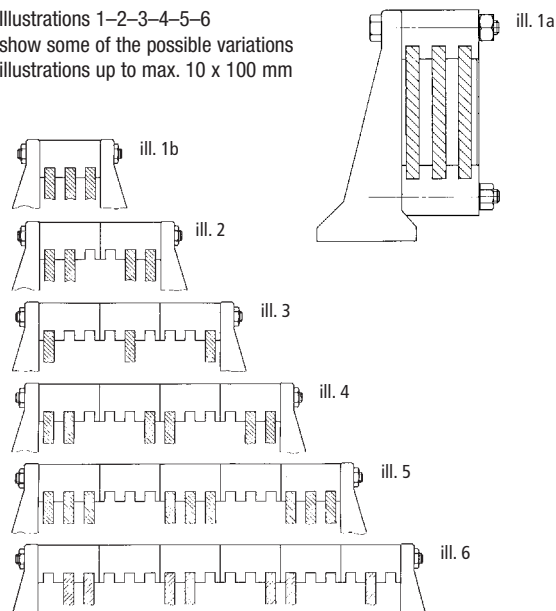Illustrations 1–2–3–4–5–6
show some of the possible variations
illustrations up to max. 10 x 100 mm



H. with lateral support PSB/1 = 177 mm
PSB/2 = 127 mm
M. with block PSB/6 = 36 mm
PSB/8 = 48 mm
PSB/10 = 60 mm

Art.-no.	Packaging-unit	Article group	H (mm)	D (mm)	Operating voltage	For thread
90175	96	PSB/1	177	46	1000	M10
90176	144	PSB/2	127	46	1000	M10
90177	244	PSB/120	177	35	1000	M10
90178	36	PSB/6	37	36	1000	M10
90179	30	PSB/8	38	48	1000	M10
90180	24	PSB/10	38	60	1000	M10


Art.-no.	Packaging-unit	Article group	Illustration	H (mm)	L (mm)	Operating voltage	For thread	B
90187		PSB	ill. 1A	177		1000	M10	6
90188		PSB	ill. 1A	177		1000	M10	8
90189		PSB	ill. 1A	177		1000	M10	10
90190		PSB	ill. 1B	177	162	1000	M10	6
90191		PSB	ill. 1B	177	174	1000	M10	8
90192		PSB	ill. 1B	177	186	1000	M10	10
90193		PSB	ill. 2	177	198	1000	M10	6
90194		PSB	ill. 2	177	222	1000	M10	8
90195		PSB	ill. 2	177	246	1000	M10	10
90196		PSB	ill. 3	177	234	1000	M10	6
90197		PSB	ill. 3	177	270	1000	M10	8
90198		PSB	ill. 3	177	306	1000	M10	10
90199		PSB	ill. 4	177	270	1000	M10	6
90200		PSB	ill. 4	177	318	1000	M10	8
90201		PSB	ill. 4	177	366	1000	M10	10
90202		PSB	ill. 5	177	306	1000	M10	6
90203		PSB	ill. 5	177	366	1000	M10	8
90204		PSB	ill. 5	177	426	1000	M10	10
90205		PSB	ill. 5	177	342	1000	M10	6
90206		PSB	ill. 5	177	414	1000	M10	8
90207		PSB	ill. 5	177	486	1000	M10	10
90211		PSB	ill. 1A	127		1000	M10	6
90212		PSB	ill. 1A	127		1000	M10	8
90213		PSB	ill. 1A	127		1000	M10	10
90214		PSB	ill. 1B	127	152	1000	M10	6
90215		PSB	ill. 1B	127	164	1000	M10	8
90216		PSB	ill. 1B	127	176	1000	M10	10
90217		PSB	ill. 2	127	188	1000	M10	6
90218		PSB	ill. 2	127	212	1000	M10	8
90219		PSB	ill. 2	127	236	1000	M10	10
90220		PSB	ill. 3	127	224	1000	M10	6
90221		PSB	ill. 3	127	260	1000	M10	8
90222		PSB	ill. 3	127	296	1000	M10	10
90223		PSB	ill. 4	127	260	1000	M10	6
90224		PSB	ill. 4	127	308	1000	M10	8
90225		PSB	ill. 4	127	356	1000	M10	10
90226		PSB	ill. 5	127	296	1000	M10	6
90227		PSB	ill. 5	127	356	1000	M10	8
90228		PSB	ill. 5	127	416	1000	M10	10
90229		PSB	ill. 6	127	332	1000	M10	6
90230		PSB	ill. 6	127	404	1000	M10	8
90231		PSB	ill. 6	127	476	1000	M10	10

The above mentioned data are only for information purposes and are without a guarantee. The customer is required to check from time to time if the product is suitable for the required application.

Upon request milled bus bar supports and other from GPO-3 extracted details can be supplied.
In this instance drawings are to be submitted.

Mounting material / threaded bolts

GB threaded bolt




Art.-no.	Packaging-unit	Article group	Thread M	Length L (mm)
90270	100	GB	M3	12
90271	100	GB	M3	15
90272	100	GB	M4	15
90273	100	GB	M4	16
90274	100	GB	M4	18
90275	100	GB	M4	20
90276	100	GB	M5	20
90277	100	GB	M5	22
90278	100	GB	M5	27
90279	100	GB	M5	30
90280	100	GB	M6	18
90281	100	GB	M6	20
90282	100	GB	M6	25
90283	100	GB	M6	27
90284	100	GB	M6	33
90285	100	GB	M6	35
90286	100	GB	M8	20
90287	100	GB	M8	23
90288	100	GB	M8	25
90289	100	GB	M8	30
90290	100	GB	M8	33
90291	100	GB	M8	35
90292	100	GB	M8	38
90293	100	GB	M8	50
90294	100	GB	M10	30
90295	100	GB	M10	35
90296	100	GB	M10	38
90297	100	GB	M10	40
90298	100	GB	M10	45
90299	100	GB	M10	50
90300	100	GB	M12	30
90301	100	GB	M12	50
90326	100	GB	M16	40
90327	100	GB	M16	60

hexagon screw M10 with nut and washer




Art.-no.	Packaging-unit	Article group	Thread M	Length L (mm)
90309	100	SKS	M10	60
90310	100	SKS	M10	80
90311	100	SKS	M10	70
90312	100	SKS	M10	90
90313	100	SKS	M10	100
90314	100	SKS	M10	110
90315	100	SKS	M10	140
90316	100	SKS	M10	150
90317	100	SKS	M10	160

threaded bolt M10 complete with nut and washer



Art.-no.	Packaging-unit	Article group	Thread M	Length L (mm)
90318	100	GB	M10	194
90319	100	GB	M10	230
90320	100	GB	M10	242
90321	100	GB	M10	270
90322	100	GB	M10	290
90323	100	GB	M10	350
90324	100	GB	M10	410
90325	100	GB	M10	1000

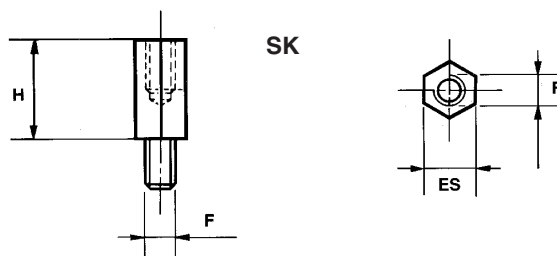Hexagon spacer in brass



Art.-no.	Packaging-unit	Thread M	Height H mm	Wrench opening SW*
90330	100	M4	15	7
90331	100	M4	20	7
90332	100	M4	25	7
90333	100	M4	30	7
90334	100	M4	50	7
90335	100	M4	70	7
90336	100	M4	90	7
90337	100	M5	15	8
90338	100	M5	20	8
90339	100	M5	25	8
90340	100	M5	30	8
90341	100	M5	50	8
90342	100	M5	70	8
90343	100	M5	90	8
90344	100	M6	15	10
90345	100	M6	20	10
90346	100	M6	25	10
90347	100	M6	30	10
90348	100	M6	50	10
90349	100	M6	70	10
90350	100	M6	90	10
90351	100	M8	15	13
90352	100	M8	20	13
90353	100	M8	25	13
90354	100	M8	30	13
90355	100	M8	50	13
90356	100	M8	70	13
90357	100	M8	90	13

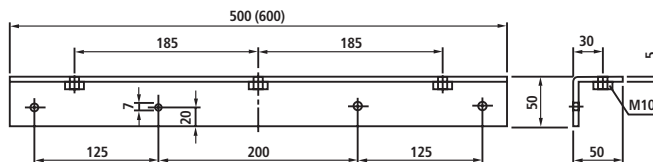
* SW = Screw Width



Bus bar support L


support L185/1

Art.-no. 90392



support L185/2 (2 x M10 each phase)

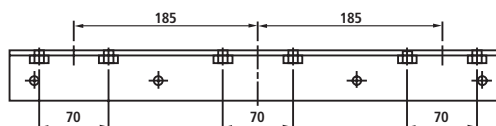Art.-no. 90395





Bus bar supports in general

Characteristics of the raw materials (GFK-profile, hot hardened)

■ temperature range	-40 °C up to +130 °C
■ operating AC voltage	1000 Volt
■ continuous current	L/Z 280 mm 2500 A L/Z 500 mm 4000 A
■ phase clearance	L/Z 280 mm 100 mm L/Z 500 mm 185 mm
■ form stability	DIN 53462 °C > 200
■ natural density	DIN 53479 gr/cm ² approx. 1.7
■ fire resistance	UL 94 HB
■ discharge resistance	DIN 53481 kV/cm 10
■ resistance voltage tracking	DIN IEC 112 CTI 600
■ specific flow resistance	DIN 53482 Ohm x cm 1012



All bus bars are type tested acc. to VDE 0660 part 500

- torque for M10 approx. 4.5 Nm
- copper bus bar 10 mm thick made of copper F30 not nickle-plated



support L100

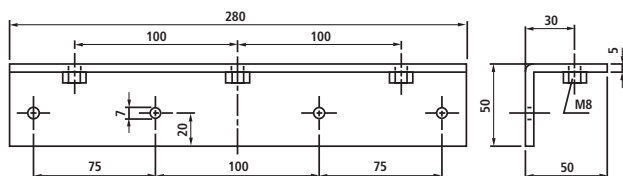Art.-no. 90392




Type	Art.-no.	Packaging-unit	Article group	Length (mm)	Profile (mm)	Bore (mm)	Thread M	Colour
L100	90391	1	L	280	50/50	7	M8	■
L185/1	90392	1	L	500	50/50	7	M10	■
L185/2	90395	1	L	500	50/50	7	M10	■



Bus bar support Z


support Z185/1

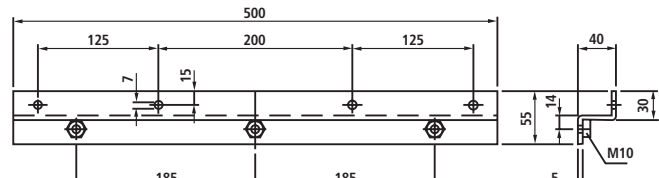Art.-no. 90382



support Z185/2 (2 x M10 each phase)

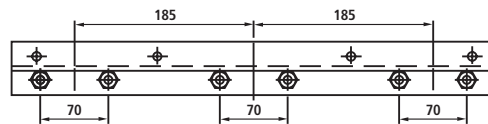Art.-no. 90385



Bus bar supports in general

Characteristics of the raw materials (GFK-profile, hot hardened)


■ temperature range	-40 °C up to +130 °C
■ operating AC voltage	1000 Volt
■ continuous current	L/Z 280 mm 2500 A L/Z 500 mm 4000 A
■ phase clearance	L/Z 280 mm 100 mm L/Z 500 mm 185 mm
■ form stability	DIN 53462 °C > 200
■ natural density	DIN 53479 gr/cm ² approx.1.7
■ fire resistance	UL 94 HB
■ discharge resistance	DIN 53481 kV/cm 10
■ resistance voltage tracking	DIN IEC 112 CTI 600
■ specific flow resistance	DIN 53482 Ohm x cm 1012

All bus bars are type tested acc. to VDE 0660 part 500

- torque for M10 approx. 4.5 Nm
- copper bus bar 10 mm thick made of copper F30
not nickle-plated

support Z100

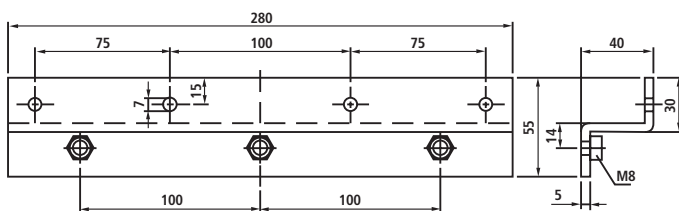Art.-no. 90381



Type	Art.-no	Packaging-unit	Article group	Length (mm)	Profile (mm)	Bore (mm)	Thread M	Colour
Z100	90381	1	Z	280	30/40/30	7	M8	■
Z185/1	90382	1	Z	500	30/40/30	7	M10	■
Z185/2	90385	1	Z	500	30/40/30	7	M10	■



Additional products

Shunts

Amperemeter change-over switch

Voltmeter change-over switch

NEOZED fuse base

Contact tongue



Shunts

Technical data:

Operating conditions

working temperature range	$-10 \leq \vartheta \leq +55 \text{ }^{\circ}\text{C}$
storage temperature	$-25 \leq \vartheta \leq +65 \text{ }^{\circ}\text{C}$
relative air humidity (no dewing)	$\leq 75 \%$
climatic adaptability	climatic class 3 acc. VDE/VDI 3540

Accuracy

accuracy class	class 0.5 (class 0.2 upon request)
----------------	---------------------------------------

Material

resistance bars	manganin
connection units	
construction type A	brass
construction type B/C	copper

Connections

current phase	refer to drawings
voltage phase	M 5 x 8

Dimensions

refer to drawings

Protection

IP 00

Material profile of the connection units

construction type A	with isolating base (...25 A) without isolating base (30...150 A)
construction type B	L-profile
construction type C	T-profile

Weight

upon request

Application

Shunts are being used for the indirect monitoring of high electrical currents. The production of the shunts conform to the requirements of DIN 43704 for currents from 1 A up to 20 kA and voltage drops from 60 mV up to 300 mV. Upon request additional ranges can be supplied where the nominal values of current and voltage drop deviate from the DIN series.

Function principle

The current flowing through the shunts create a voltage drop, which can be measured with a measuring device switched in parallel. With parallel switching the shunts and the measuring devices, it is possible to use voltage measurement devices to measure the current, or to gain an extension of the measuring facilities of the existing current measuring units. The shunts are manufactured in three different versions, to accommodate the nominal currents.

Production regulations

DIN 43703	Shunts
DIN 43780	direct active, signalling measuring units and accessories

Special configurations

nominal rated voltage drop	acc. to customers information
nominal current	acc. to customers information
accuracy class	0.2
isolation base	for shunts 30...200 A/60 mV

Order details	
Type	Shunts
nominal rated voltage drop	60 mV 100 mV 150 mV 300 mV acc. to customers information**)
nominal current	see table in the data part acc. to customers information**)
Accuracy	class 0.5*) class 0.2 upon request
Isolation base	for construction type A standard bus bars snap-on mountings can be supplied 1...25 A standard 30...200 A (60 mV) accessories
Cap	1...25 A (60 mV; 100 mV; 150 mV) accessories 30...200 A (60 mV) accessories
Special configuration**)	upon request

*) standard **) exact data are required

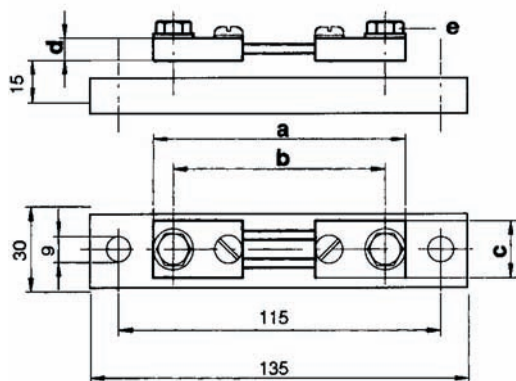
Order example:

shunt, nominal rated voltage drop 60 mV, nominal current 1000 A, class 0.5

technical amendments may be made (without prior notice)

Shunts

Construction type A



Dimensions for 1...25 A

Nominal rated voltage drop 60 mV		
Size	1...25 A	40...150 A
a	90	100
b	78	80
c	20	20
d	8	8
e	M 5 x 12	M 8 x 16

Nominal rated voltage drop 100 mV		
Size	1...25 A	40...150 A
a	90	145
b	78	125
c	20	25
d	8	8
e	M 5 x 12	M 8 x 16

Nominal rated voltage drop 150 mV		
Size	1...25 A	40...150 A
a	90	225
b	78	205
c	20	25
d	8	8
e	M 5 x 12	M 8 x 16

Nominal rated voltage drop 300 mV		
Size	1...25 A	40...150 A
a	90	385
b	78	364
c	20	25
d	8	8
e	M 5 x 12	M 8 x 16

Shunts



Construction type A

Construction type A				
Art.-no.	Base	Type	Nominal current	Nominal voltage drop
71911	without	SHUNT 60	1 A	60 mV
71911S	with	SHUNT 60	1 A	60 mV
71912	without	SHUNT 60	1.5 A	60 mV
71912S	with	SHUNT 60	1.5 A	60 mV
71913	without	SHUNT 60	2.5 A	60 mV
71913S	with	SHUNT 60	2.5 A	60 mV
71914	without	SHUNT 60	4 A	60 mV
71914S	with	SHUNT 60	4 A	60 mV
71915	without	SHUNT 60	6 A	60 mV
71915S	with	SHUNT 60	6 A	60 mV
71916	without	SHUNT 60	10 A	60 mV
71916S	with	SHUNT 60	10 A	60 mV
71917	without	SHUNT 60	15 A	60 mV
71917S	with	SHUNT 60	15 A	60 mV
71918	without	SHUNT 60	25 A	60 mV
71918S	with	SHUNT 60	25 A	60 mV
71919	without	SHUNT 60	40 A	60 mV
71919S	with	SHUNT 60	40 A	60 mV
71920	without	SHUNT 60	60 A	60 mV
71920S	with	SHUNT 60	60 A	60 mV
71921	without	SHUNT 60	100 A	60 mV
71921S	with	SHUNT 60	100 A	60 mV
71922	without	SHUNT 60	150 A	60 mV
71922S	with	SHUNT 60	150 A	60 mV
72911	without	SHUNT 100	1 A	100 mV
72911S	with	SHUNT 100	1 A	100 mV
72912	without	SHUNT 100	1.5 A	100 mV
72912S	with	SHUNT 100	1.5 A	100 mV
72913	without	SHUNT 100	2.5 A	100 mV
72913S	with	SHUNT 100	2.5 A	100 mV
72914	without	SHUNT 100	4 A	100 mV
72914S	with	SHUNT 100	4 A	100 mV
72915	without	SHUNT 100	6 A	100 mV
72915S	with	SHUNT 100	6 A	100 mV
72916	without	SHUNT 100	10 A	100 mV
72916S	with	SHUNT 100	10 A	100 mV
72917	without	SHUNT 100	15 A	100 mV
72917S	with	SHUNT 100	15 A	100 mV
72918	without	SHUNT 100	25 A	100 mV
72918S	with	SHUNT 100	25 A	100 mV
72919	without	SHUNT 100	40 A	100 mV
72919S	with	SHUNT 100	40 A	100 mV
72920	without	SHUNT 100	60 A	100 mV
72920S	with	SHUNT 100	60 A	100 mV
72921	without	SHUNT 100	100 A	100 mV
72921S	with	SHUNT 100	100 A	100 mV
72922	without	SHUNT 100	150 A	100 mV
72922S	with	SHUNT 100	150 A	100 mV

Construction type A				
Art.-no.	Base	Type	Nominal current	Nominal voltage drop
73911	without	SHUNT 150	1 A	150 mV
73911S	with	SHUNT 150	1 A	150 mV
73912	without	SHUNT 150	1.5 A	150 mV
73912S	with	SHUNT 150	1.5 A	150 mV
73913	without	SHUNT 150	2.5 A	150 mV
73913S	with	SHUNT 150	2.5 A	150 mV
73914	without	SHUNT 150	4 A	150 mV
73914S	with	SHUNT 150	4 A	150 mV
73915	without	SHUNT 150	6 A	150 mV
73915S	with	SHUNT 150	6 A	150 mV
73916	without	SHUNT 150	10 A	150 mV
73916S	with	SHUNT 150	10 A	150 mV
73917	without	SHUNT 150	15 A	150 mV
73917S	with	SHUNT 150	15 A	150 mV
73918	without	SHUNT 150	25 A	150 mV
73918S	with	SHUNT 150	25 A	150 mV
73919	without	SHUNT 150	40 A	150 mV
73919S	with	SHUNT 150	40 A	150 mV
73920	without	SHUNT 150	60 A	150 mV
73920S	with	SHUNT 150	60 A	150 mV
73921	without	SHUNT 150	100 A	150 mV
73921S	with	SHUNT 150	100 A	150 mV
73922	without	SHUNT 150	150 A	150 mV
73922S	with	SHUNT 150	150 A	150 mV
74911	without	SHUNT 300	1 A	300 mV
74911S	with	SHUNT 300	1 A	300 mV
74912	without	SHUNT 300	1.5 A	300 mV
74912S	with	SHUNT 300	1.5 A	300 mV
74913	without	SHUNT 300	2.5 A	300 mV
74913S	with	SHUNT 300	2.5 A	300 mV
74914	without	SHUNT 300	4 A	300 mV
74914S	with	SHUNT 300	4 A	300 mV
74915	without	SHUNT 300	6 A	300 mV
74915S	with	SHUNT 300	6 A	300 mV
74916	without	SHUNT 300	10 A	300 mV
74916S	with	SHUNT 300	10 A	300 mV
74917	without	SHUNT 300	15 A	300 mV
74917S	with	SHUNT 300	15 A	300 mV
74918	without	SHUNT 300	25 A	300 mV
74918S	with	SHUNT 300	25 A	300 mV
74919	without	SHUNT 300	40 A	300 mV
74919S	with	SHUNT 300	40 A	300 mV
74920	without	SHUNT 300	60 A	300 mV
74920S	with	SHUNT 300	60 A	300 mV
74921	without	SHUNT 300	100 A	300 mV
74921S	with	SHUNT 300	100 A	300 mV
74922	without	SHUNT 300	150 A	300 mV
74922S	with	SHUNT 300	150 A	300 mV

Shunts

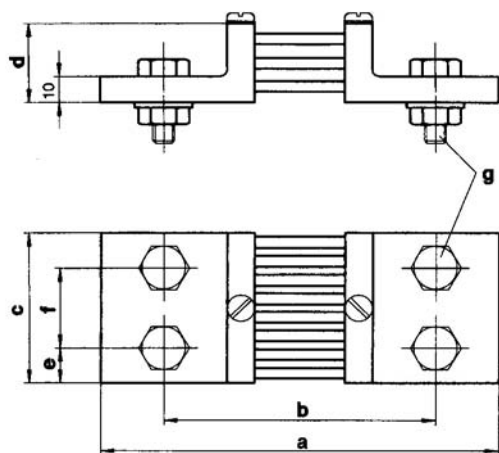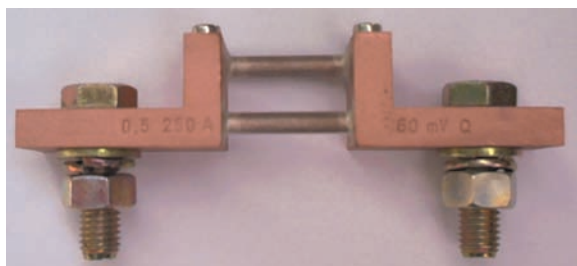Construction type B



Nominal rated voltage drop 60 mV					
Size	250 A	400 A 600 A	1000 A	1500 A	2500 A
a	145	145	165	165	165
b	105	105	115	115	115
c	30	40	60	90	120
d	30	30	30	30	30
e	15	20	30	21	30
f				48	60
g	M 12 x 40	M 16 x 45	M 20 x 50	M 16 x 45	M 20 x 50
no. of current connect.	2 x 1	2 x 1	2 x 1	2 x 2	2 x 2

Nominal rated voltage drop 100 mV					
Size	250 A	400 A 600 A	1000 A	1500 A	
a	190	190	210	210	
b	150	150	160	160	
c	30	40	60	120	
d	30	30	30	30	
e	15	20	30	30	
f				60	
g	M 12 x 40	M 16 x 45	M 20 x 50	M 20 x 50	
no. of current connect.	2 x 1	2 x 1	2 x 1	2 x 2	


Construction type B				
Art.-no.	Base	Type	Nominal current	Nominal rated voltage drop
71923	without	SHUNT 60	250 A	60 mV
71924	without	SHUNT 60	400 A	60 mV
71925	without	SHUNT 60	600 A	60 mV
71926	without	SHUNT 60	1000 A	60 mV
71996	without	SHUNT 60	1500 A	60 mV
71997	without	SHUNT 60	2500 A	60 mV
72923	without	SHUNT 100	250 A	100 mV
72924	without	SHUNT 100	400 A	100 mV
72925	without	SHUNT 100	600 A	100 mV
72926	without	SHUNT 100	1000 A	100 mV
72935	without	SHUNT 100	1500 A	100 mV
73923	without	SHUNT 150	300 A	150 mV
73924	without	SHUNT 150	400 A	150 mV
73925	without	SHUNT 150	600 A	150 mV
73926	without	SHUNT 150	1000 A	150 mV
74923	without	SHUNT 300	250 A	300 mV
74924	without	SHUNT 300	400 A	300 mV
74925	without	SHUNT 300	600 A	300 mV
74926	without	SHUNT 300	1000 A	300 mV

Nominal rated voltage drop 150 mV					
Size	250 A	400 A 600 A	1000 A		
a	270	270	290		
b	230	230	240		
c	30	40	70		
d	50	50	60		
e	15	20	35		
g	M 12 x 40	M 16 x 45	M 20 x 50		
no. of current connect.	2 x 1	2 x 1	2 x 1		

Nominal rated voltage drop 300 mV					
Size	250 A	400 A 600 A	1000 A		
a	429	429	449		
b	389	389	399		
c	30	40	70		
d	50	50	60		
e	15	20	35		
g	M 12 x 40	M 16 x 45	M 20 x 50		
no. of current connect.	2 x 1	2 x 1	2 x 1		

Shunts

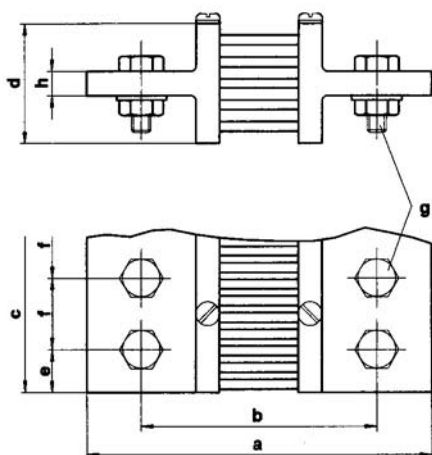Construction type C



Nominal rated voltage drop 60 mV				
Size	4000 A	6000 A	10000 A	15000 A
a	165	175	185	185
b	115	125	135	135
c	120	154	206	310
d	60	130	170	170
e	30	25	25	25
f	60	52	52	52
g	M 20 x 60	M 20 x 75	M 20 x 80	M 20 x 80
h	15	25	30	30
no. of current connect.	2 x 2	2 x 3	2 x 4	2 x 6

Nominal rated voltage drop 100 mV				
Size	2500 A	4000 A	6000 A	
a	210	220	220	
b	160	170	170	
c	120	120	154	
d	60	130	130	
e	30	30	25	
f	60	60	52	
g	M 20 x 50	M 20 x 50	M 20 x 75	
h	15	25	25	
no. of current connect.	2 x 2	2 x 2	2 x 3	

Construction type C				
Art.-no.	Base	Type	Nominal current	Nominal rated voltage drop
71927 *	without	SHUNT 60	1500 A	60 mV
71928	without	SHUNT 60	2500 A	60 mV
71929	without	SHUNT 60	4000 A	60 mV
71930	without	SHUNT 60	6000 A	60 mV
71931	without	SHUNT 60	1000 A	60 mV
71932	without	SHUNT 60	1500 A	60 mV
72928	without	SHUNT 100	2500 A	100 mV
72929	without	SHUNT 100	4000 A	100 mV
72930	without	SHUNT 100	6000 A	100 mV
73927	without	SHUNT 150	1500 A	150 mV
73928	without	SHUNT 150	2500 A	150 mV
73929	without	SHUNT 150	4000 A	150 mV
73930	without	SHUNT 150	6000 A	150 mV
73931	without	SHUNT 150	10000 A	150 mV
74927	without	SHUNT 300	1500 A	300 mV
74928	without	SHUNT 300	2500 A	300 mV
74929	without	SHUNT 300	4000 A	300 mV
74930	without	SHUNT 300	6000 A	300 mV

* special configuration

Nominal rated voltage drop 150 mV					
Size	1500 A	2500 A	4000 A	6000 A	10000 A
a	290	290	300	300	310
b	240	240	250	250	260
c	90	120	120	154	206
d	60	60	130	130	170
e	21	30	30	25	25
f	48	60	60	52	52
g	M 16 x 60	M 20 x 60	M 20 x 75	M 20 x 75	M 20 x 80
h	15	15	25	25	30
no. of current connect.	2 x 1	2 x 1	2 x 2	2 x 3	2 x 4

Nominal rated voltage drop 300 mV				
Size	1500 A	2500 A	4000 A	6000 A
a	449	449	459	459
b	399	399	409	409
c	90	120	120	154
d	60	60	130	130
e	31	30	30	25
f	48	60	60	52
g	M 16 x 60	M 20 x 60	M 20 x 75	M 20 x 75
h	15	15	25	25
no. of current connect.	2 x 1	2 x 2	2 x 2	2 x 3

Additional products

Amperemeter change-over switch





Amperemeter change-over switch		
		Art.-no.
amperemeter change-over switch	with 0-position	59061
amperemeter change-over switch	without 0-position	59062



Voltmeter change-over switch


Voltmeter change-over switch		
		Art.-no.
voltmeter change-over switch	with 0-position	59060
voltmeter change-over switch	without 0-position	59063

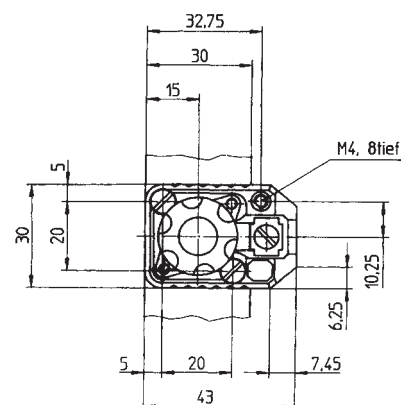NEOZED fuse base



NEOZED fuse base		
		Art.-no.
fuse base 10 A		59011

Contact tongue



Contact tongue				
	Length	Depth	Width	Art.-no.
thread M5	38	2	24	59055

Voltage transformers

MBEV
MBER
MBE

1-pole isolated

MBZV
MBZR
MBZ

2-pole isolated





Voltage transformers

1-pole isolated



Rated voltage	Secondary rated voltage 100 V / $\sqrt{3}$ V				
Type	MBEV 6	MBEV 10	MBEV 20	MBEV 50	MBEV 100
Accuracy class	1	0.5 / 1	0.5 / 1	0.5 / 1	0.5 / 1
Burden	VA 3	VA 5/10	VA 10/20	VA 25/50	VA 50/100
Primary V	Art.-no.	Art.-no.	Art.-no.	Art.-no.	Art.-no.
100 / $\sqrt{3}$	SEV1001	SEV1010	SEV1019	SE V1028	SEV1037
110 / $\sqrt{3}$	SEV1002	SEV1011	SEV1020	SEV1029	SEV1038
220 / $\sqrt{3}$	SEV1003	SEV1012	SEV1021	SEV1030	SEV1039
380 / $\sqrt{3}$	SEV1004	SEV1013	SEV1022	SEV1031	SEV1040
400 / $\sqrt{3}$	SEV1005	SEV1014	SEV1023	SEV1032	SEV1041
500 / $\sqrt{3}$	SEV1006	SEV1015	SEV1024	SEV1033	SEV1042
600 / $\sqrt{3}$	SEV1007	SEV1016	SEV1025	SEV1034	SEV1043
800 / $\sqrt{3}$			SEV1026	SEV1035	SEV1044
1000 / $\sqrt{3}$			SEV1027	SEV1036	SEV1045

2-pole isolated



Rated voltage	Secondary rated voltage 100 V				
Type	MBZV 6	MBZV 10	MBZV 20	MBZV 50	MBZV 100
Accuracy class	1	0.5 / 1	0.5 / 1	0.5 / 1	0.5 / 1
Burden	VA 6	VA 10/20	VA 20/40	VA 50/100	VA 100/200
Primary V	Art.-no.	Art.-no.	Art.-no.	Art.-no.	Art.-no.
100	SZV1001	SZV1010	SZV1019	SZ V1028	SZV1037
110	SZV1002	SZV1011	SZV1020	SZV1029	SZV1038
220	SZV1003	SZV1012	SZV1021	SZV1030	SZV1039
380	SZV1004	SZV1013	SZV1022	SZV1031	SZV1040
400	SZV1005	SZV1014	SZV1023	SZV1032	SZV1041
500	SZV1006	SZV1015	SZV1024	SZV1033	SZV1042
600	SZV1007	SZV1016	SZV1025	SZV1034	SZV1043
800			SZV1026	SZV1035	SZV1044
1000			SZV1027	SZV1036	SZV1045

Technical data of the standard design

standard	IEC 60044-2	
max. voltage for equipment	0.72 kV up to 600 V - 1.2 kV up to 1000 V	
test voltage	0.72 kV / 3 kV; 1 kV / 6 kV	
rated frequency	50 / 60 Hz	
place of application	indoors up to 2000 m above normal sea level	
climatic conditions	IEC 60721-3-3	3K4
mechanical conditions	IEC 60721-3-3	3M3
vibration proof	IEC 60068-2	2.5 g (25...100 Hz)
isolating class	IEC 60085	E (120 °C)
housing protection class	IEC 60529	housing: IP 50 terminals with cover: IP 20
isolating material	UL E44423 UL E47960 UL E93687 UL E51047	copper coated wire winding contacts isolation coating imprinted coating

Type	Housing in mm							Weight kg	Standard accessories
	A	B	C	D	E	F	Ø G		
MBEV 6	140	85	100	125	68	52	4.5	2.3	terminal covers
MBEV 10	165	90	105	145	70	67	4.5	3	
MBEV 20	175	90	105	155	70	82	4.5	4.1	
MBEV 50	195	105	125	175	81	95	5.5	6	
MBEV 100	210	128	155	190	101	97	8	8	
MBZV 6	140	85	100	125	68	52	4.5	2.3	terminal covers
MBZV 10	165	90	105	145	70	67	4.5	3	
MBZV 20	175	90	105	155	70	82	4.5	4.1	
MBZV 50	195	105	125	175	81	95	5.5	6	
MBZV 100	210	128	155	190	101	97	8	8	

Voltage transformers

1-pole isolated

Rated voltage	TypeSize		Secondary rated voltage 100 V / $\sqrt{3}$ V								P _i VA	L _{2th} A
Primary V			Accuracy class									
			0.2		0.5		1		3			
			VA	Art.-no.	VA	Art.-no.	VA	Art.-no.	VA	Art.-no.		
100 / $\sqrt{3}$ 110 / $\sqrt{3}$ 200 / $\sqrt{3}$ 220 / $\sqrt{3}$ 230 / $\sqrt{3}$ corresponding isolation level U _M = 0.72 kV	MBER 60	2	–	–	–	–	0.5	SE1001	1.5	SE1002	0.3	0.6
	MBER 70		0.2	SE1003	0.5	SE1004	1	SE1005	3	SE1006	0.6	0.8
	MBER 100		1	SE1007	2.5	SE1008	5	SE1009	15	SE1010	1.5	1.2
	MBER 104		5	SE1011	15	SE1012	30	SE1013	30	SE1014	2	0.9
	MBE 100		–	–	10	SE1015	15	SE1016	50	SE1017	5	1
	MBE 150	1	7.5	SE1018	20	SE1019	50	SE1020	120	SE1021	10	3
	MBE 150	2	10	SE1022	30	SE1023	60	SE1024	150	SE1025	12	3
	MBE 150	3	15	SE1026	50	SE1027	100	SE1028	200	SE1029	15	3
	MBE 150	4	25	SE1030	60	SE1031	120	SE1032	250	SE1033	20	3
380 / $\sqrt{3}$ 400 / $\sqrt{3}$ 500 / $\sqrt{3}$ 600 / $\sqrt{3}$ 660 / $\sqrt{3}$ corresponding isolation level U _M = 0.72 kV	MBER 100		0.5	SE1034	1.5	SE1035	3	SE1036	10	SE1037	1.5	1.2
	MBER 104		5	SE1038	10	SE1039	25	SE1040	25	SE1041	2	0.9
	MBE 100		–	–	10	SE1042	15	SE1043	50	SE1044	5	1
	MBE 150	1	7.5	SE1045	20	SE1046	50	SE1047	120	SE1048	10	3
	MBE 150	2	10	SE1049	30	SE1050	60	SE1051	150	SE1052	12	3
	MBE 150	3	15	SE1053	50	SE1054	100	SE1055	200	SE1056	15	3
	MBE 150	4	25	SE1057	60	SE1058	120	SE1059	250	SE1060	20	3
690 / $\sqrt{3}$ 750 / $\sqrt{3}$ 1000 / $\sqrt{3}$ corresponding isolation level U _M = 1.2 kV	MBER 100/1		–	–	1	SE1061	2	SE1062	5	SE1063	1.5	1.2
	MBER 104/1		5	SE1064	10	SE1065	25	SE1066	25	SE1067	2	0.9
	MBE 100/1		–	–	7.5	SE1068	15	SE1069	30	SE1070	5	1
	MBE 150/1	1	7.5	SE1071	20	SE1072	45	SE1073	100	SE1074	10	3
	MBE 150/1	2	10	SE1075	30	SE1076	60	SE1077	120	SE1078	12	3
	MBE 150/1	3	15	SE1079	45	SE1080	90	SE1081	150	SE1082	15	3
	MBE 150/1	4	20	SE1083	60	SE1084	100	SE1085	180	SE1086	20	3

additional charges for special configurations

Auxiliary winding for production of an open delta winding (VA rating of measuring winding reduced by approx. 30 %): .../ $\sqrt{3}$ / .../ $\sqrt{3}$ / 100 / $\sqrt{3}$ V

Type	Size	Long time current
MBE 150	–	1 A / 8 h

Type	Size	Long time current
MBE 100	–	1 A / 8 h
MBE 150	1	5 A / 8 h
MBE 150	2	6 A / 8 h
MBE 150	3	8 A / 8 h

Interim voltage transformer for production of an open delta winding (without measuring winding): 100 / $\sqrt{3}$ / 100 / $\sqrt{3}$ V

Type	Tropical design	Resin hardened
MBE (Z) R 60		
MBE (Z) R 70		
MBE (Z) R 100 (/1)		
MBE (Z) R 104 (/1)		
MBE (Z) 100 (/1)		–
MBE (Z) 150 (/1)		–

snap-on mountings for:

Type	
MBE (Z) R 60	
MBE (Z) R 70	

joint foot mounting for:

Type	
MBE (Z) R 70	

additional special configurations upon request

Voltage transformers

2-pole isolated

Rated voltage	TypeSize		Secondary rated voltage 100 V								P _i VA	L _{2th} A
Primary V			Accuracy class									
			0.2		0.5		1		3			
			VA	Art.-no.	VA	Art.-no.	VA	Art.-no.	VA	Art.-no.		
100, 110, 200, 220, 230 corresponding isolation level U _M = 0.72 kV	MBZR 60	2	–	–	0.5	SZ1001	1	SZ1002	3	SZ1003	0.5	0.4
	MBZR 70		1	SZ1004	2.5	SZ1005	5	SZ1006	15	SZ1007	2	0.5
	MBZR 100		2	SZ1008	5	SZ1009	10	SZ1010	25	SZ1011	2.5	0.8
	MBZR 104		5	SZ1012	15	SZ1013	30	SZ1014	30	SZ1015	3	0.9
	MBZ 100		–	–	15	SZ1016	30	SZ1017	60	SZ1018	9	1
	MBZ 150	1	10	SZ1019	25	SZ1020	60	SZ1021	150	SZ1022	12	3
	MBZ 150	2	15	SZ1023	45	SZ1024	90	SZ1025	200	SZ1026	15	3
	MBZ 150	3	20	SZ1027	60	SZ1028	120	SZ1029	250	SZ1030	18	3
	MBZ 150	4	30	SZ1031	75	SZ1032	150	SZ1033	300	SZ1034	24	3
380, 400, 500, 600, 660 corresponding isolation level U _M = 0.72 kV	MBZR 60	2	–	–	*	*	1	SZ1035	3	SZ1036	0.5	0.4
	MBZR 70		0.5	SZ1037	1.25	SZ1038	2.5	SZ1039	7.5	SZ1040	1.5	0.5
	MBZR 100		1.5	SZ1041	3	SZ1042	10	SZ1043	20	SZ1044	2	0.8
	MBZR 104		5	SZ1045	10	SZ1046	25	SZ1047	25	SZ1048	2.5	0.9
	MBZ 100		–	–	15	SZ1049	30	SZ1050	60	SZ1051	9	1
	MBZ 150	1	10	SZ1052	25	SZ1053	60	SZ1054	150	SZ1055	12	3
	MBZ 150	2	15	SZ1056	45	SZ1057	90	SZ1058	200	SZ1059	15	3
	MBZ 150	3	20	SZ1060	60	SZ1061	120	SZ1062	250	SZ1063	18	3
	MBZ 150	4	30	SZ1064	75	SZ1065	150	SZ1066	300	SZ1067	24	3
690, 750, 1000 corresponding isolation level U _M = 1.2 kV	MBZR 60/1	2	–	–	*	*	*	*	*	*	0.5	0.4
	MBZR 70/1		*	*	*	*	*	*	*	*	1.5	0.5
	MBZR 100/1		1	SZ1068	2.5	SZ1069	5	SZ1070	15	SZ1071	1.5	0.8
	MBZR 104/1		5	SZ1072	10	SZ1073	25	SZ1074	25	SZ1075	2.5	0.9
	MBZ 100/1		–	–	7.5	SZ1076	15	SZ1077	30	SZ1078	9	0.8
	MBZ 150/1	1	7.5	SZ1079	20	SZ1080	50	SZ1081	120	SZ1082	12	2
	MBZ 150/1	2	10	SZ1083	30	SZ1084	60	SZ1085	150	SZ1086	15	2
	MBZ 150/1	3	15	SZ1087	45	SZ1088	100	SZ1089	200	SZ1090	18	2
	MBZ 150/1	4	20	SZ1091	60	SZ1092	120	SZ1093	250	SZ1094	24	2


* upon request

Technical data of the standard design		
standard	IEC 60044-2 DIN VDE 0414 T.2	
max. voltage for equipment	U _m 0.72 kV (U _m 1.2 kV)	MBE.... MBZ... MBE.../1. MBZ.../1
test voltage	3 kV. 50 Hz. 1 min (6 kV. 50 Hz. 1 min)	
rated frequency	50...60 Hz	
place of application	indoors up to 2000 m above normal sea level	
climatic conditions	IEC 721	3K4
mechanical conditions	IEC 721	3K3
vibration proof	IEC 68-2	2.5 g (25...100 Hz)
isolating class	DIN IEC 85 VDE 0301-1	E 120 °C
housing protection class	IEC EN 60529 DIN VDE 0470	housing: IP 50 terminals with cover: IP 20


Voltage transformers

Type	Size	Housing in mm				Weight kg	Standard accessories
		Width	Height	Depth	H		
MBZR 60 (/1)	2	60	78	52		0.5	foot mounting terminal covers
MBZR 70 (/1)		70	86	52		0.6	
MBZR 100 (/1)		100	118	73		1.1	
MBZR 104 (/1)		104	127	75		2.0	
MBZ 100 (/1)		102	105	111		3.1	
MBZ 150 (/1)	1	150	123	142	40	7.0	
MBZ 150 (/1)	2	150	123	152	50	8.0	
MBZ 150 (/1)	3	150	123	162	60	9.0	
MBZ 150 (/1)	4	150	123	182	80	11.5	

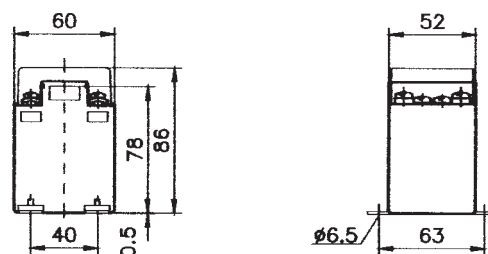
MBZR 60 (/1)
(MBER 60)




MBZR 70 (/1)
(MBER 70)

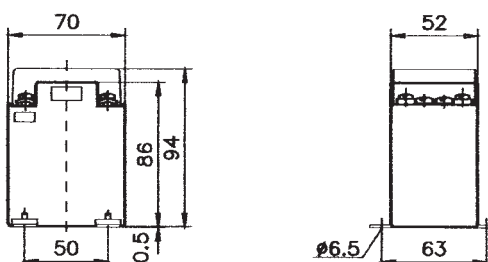

MBZR 100 (/1)
(MBER 100)

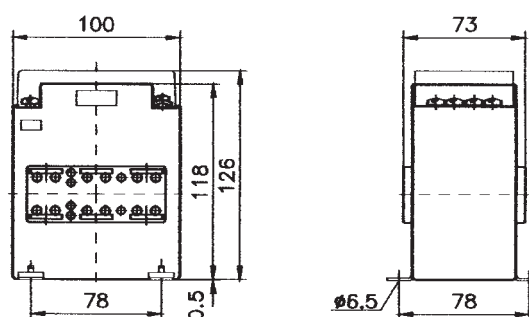

MBZR 104 (/1)
[MBER 104 (/1)]

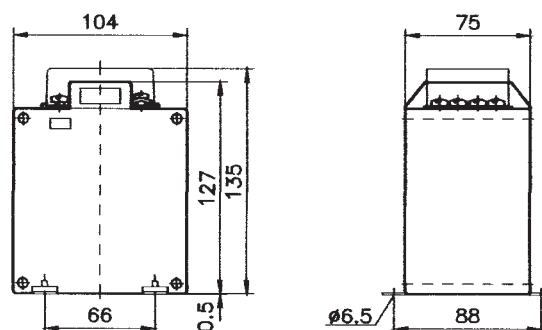

Order example

type:
rated measuring ratio:
rated burden:
accuracy class:
art.-no.:



MBZR 60
200/100 V
0.5 VA
0.5
SZ1001-200

Voltage transformers

Type	Size	Housing in mm				Weight kg	Standard accessories
		Width	Height	Depth	H		
MBER 60 (/1)	2	60	78	52		0.5	foot mounting terminal covers
MBER 70 (/1)		70	86	52		0.6	
MBER 100 (/1)		100	118	73		1.1	
MBER 104 (/1)		104	127	75		2.0	
MBE 100 (/1)		102	105	111		3.1	
MBE 150 (/1)	1	150	123	142	40	7.0	
MBE 150 (/1)	2	150	123	152	50	8.0	
MBE 150 (/1)	3	150	123	162	60	9.0	
MBE 150 (/1)	4	150	123	182	80	11.5	



MBER 60, MBER 70, MBER 100(/1), MBER 104 (/1) drawings see page 219

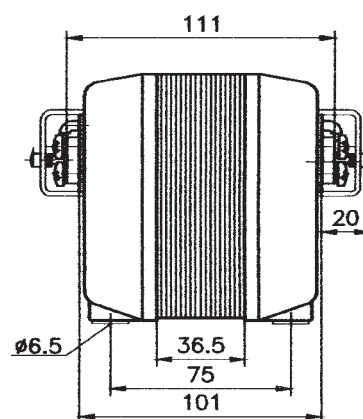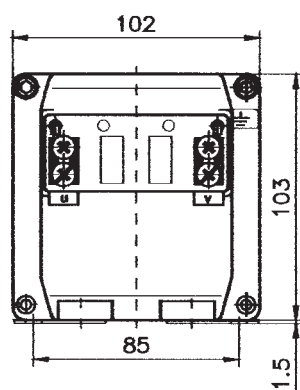MBE 100 (/1)
[MBZ 100 (/1)]



MBE 150 (/1)
[MBZ 150 (/1)]

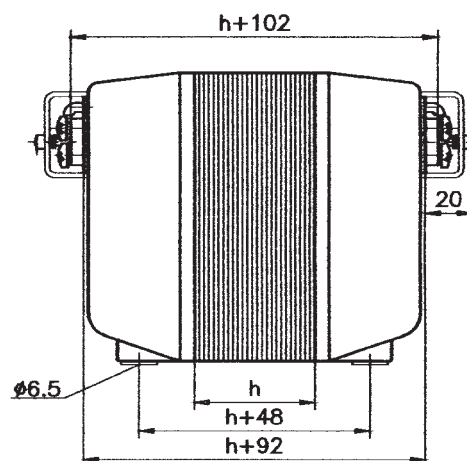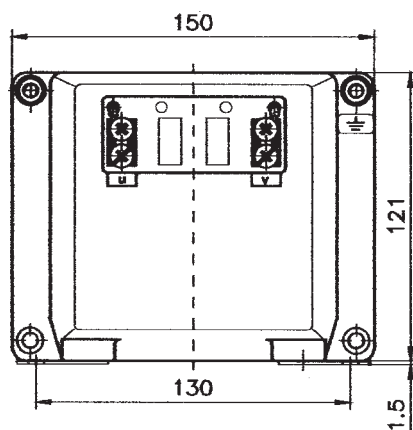size 1 – size 4



Order example

type	MBE 100/1
rated measuring ratio	750/3/100/3
rated burden	15 VA
accuracy class	1
art.-no.	SE1069-750

Measuring transducers for all electrical AC-variables

Order List

page page

SWMU	Measuring transducer for AC with integrated current transformer	236	
NMC	Clip-on measuring transducers for MBS current transformers	239	
NMC-AD	Adaptors for current transformers of any make	241	
NMC-KSx	Short circuit adaptors	241	
FASK	Flexible clip-on current transformers (Rogowski coil)	242	270
EMBSIN		244	
EMBSIN 100 IV	Measuring transducers for AC current, without auxiliary voltage supply	246	271
EMBSIN 100 I	Measuring transducers for AC current, without auxiliary voltage supply	247	271
EMBSIN 101 I	Measuring transducers for AC current, with auxiliary voltage supply	248	272
EMBSIN 201 IEV	Measuring transducers for AC current, rms measurement	249	273
EMBSIN 201 IE	Measuring transducers for AC current, rms measurement	250	275
EMBSIN 120 UV	Measuring transducers for AC voltage, without auxiliary voltage supply	251	276
EMBSIN 120 U	Measuring transducers for AC voltage, without auxiliary voltage supply	252	276
EMBSIN 121 U	Measuring transducers for AC voltage, with auxiliary voltage supply	253	272
EMBSIN 221 UEV	Measuring transducers for AC voltage, rms measurement	254	273
EMBSIN 221 UE	Measuring transducers for AC voltage, rms measurement	255	275
EMBSIN 241 FV	Measuring transducers for frequency, with auxiliary voltage supply	256	277
EMBSIN 241 F	Measuring transducers for frequency with universal AC/DC power supply	257	278
EMBSIN 241 FD	Measuring transducers for frequency difference, with universal AC/DC power supply ...	258	278
EMBSIN 271 G	Measuring transducers for phase angle, with universal AC/DC power supply	259	279
EMBSIN 271 GD	Measuring transducers for phase angle difference, with universal AC/DC power supply ..	260	281
EMBSIN 281 G	Measuring transducers for power factor, with universal AC/DC power supply	261	279
EMBSIN 351 P	Measuring transducers for active power, with universal AC/DC power supply	262	282
EMBSIN 361 Q	Measuring transducers for re-active power, with universal AC/DC power supply	263	282
EMBSIN 301	Programmable measuring transducers for AC current, rms measurement	264	283
EMBSIN 391 PV	Programmable measuring transducers for all electrical variables	265	283
EMBSIN 391	Programmable measuring transducers for electrical AC variables	267	




SWMU



NMC



FASK



EMBSIN

SWMU

Measuring transducer for
alternating current



The above photo of an SWMU 41.51 denotes a bus bar. This bus bar is not included in the supply of the unit.

- with or without auxiliary voltage supply
- with integrated current transformer housing unit
- for 35 mm DIN rail

Features/benefits

- measuring input: Sinus-shaped AC current (1 A ... 800 A),
- arithmetical mean value measurement, effective value calibrated
- measuring output: Unipolar output signal
- measurement principle: Rectifier process
- with integrated current transformer
- minimal wiring

Application

Measuring transducers for the transformation of sinus-shaped AC current. For an output signal a load-independent DC current / and an imprinted DC voltage signal is available, which stands proportionally to the measurement value of the input volume.

These signals can be used for display, recording, monitoring and/or control function.

The measuring transducer fulfills the requirements and regulations with regard to the electromagnetic compatibility (EMV) and security (IEC 1010 and EN 61010). This measuring transducer has been designed, produced, and tested in accordance with ISO 9001.

Technical data SWMU 41.51/52 SWMU 42.51/52

measuring input 		auxiliary power 	
nominal frequency	f_N 50/60 Hz	AC power supply	230 V $\pm$ 10 % (50 ... 60 Hz)
rated input current I_N		DC	24 V $\pm$ 15 %
SWMU 41.52	1 ... 10 A	power input	$\leq$ 1.5 W (2.5 VA)
SWMU 41.51	15 ... 800 A	accuracy	
consumption	$\leq$ 1 VA (2.5 VA without auxiliary voltage)	reference value	output end value
overload capacity	1.5 · I_N , constant 8 · I_N , 40 sec.	accuracy class	class 0.5
measuring output 		warming-up time	$\leq$ 5 min.
load-independent DC current	0 ... 20 mA or 4 ... 20 mA*	protection	
max. burden resistance	$\leq$ 500 Ω	electrocution protection	IP 40, housing (test wire, EN 60529) IP 20, connection terminals (test digit, EN 60529)
max. burden voltage	$\leq$ 15 V	contamination class	2
current limit		test voltages	4 kV, activ circuits against housing (DIN 57411) 4 kV, auxiliary voltage against measuring output (230 V-version) 500 V, auxiliary voltage against measuring output (24 V-DC-version)
under overload	$\leq$ 34 mA		
imprinted DC voltage	0 ... 10 V or 2 ... 10 V*		
burden resistance	$\geq$ 10 k Ω		
max. burden voltage			
under overload	$\leq$ 18 V		
voltage limit	$\leq$ 18 V		
residual ripple			
of the output current	$\leq$ 1 % p.p.		
response time	$\leq$ 500 ms		
operating temperature range	-5 °C $\leq$ ϑ $\leq$ +40 °C		

*Live-Zero only with auxiliary voltage

1. Auxiliary voltage 230 V AC

Type SWMU	Primary current A	Measuring output			
		0...20 mA and 0... 10 V	4...20 mA and 0... 10 V	0...20 mA and 2... 10 V	4...20 mA and 2... 10 V
41.52	1	61006	62006	63006	64006
	5	61007	62007	63007	64007
	10	61008	62008	63008	64008
	special*	61100	62100	63100	64100
41.51	15	61009	62009	63009	64009
	20	61010	62010	63010	64010
	25	61011	62011	63011	64011
	30	61012	62012	63012	64012
	40	61013	62013	63013	64013
	50	61014	62014	63014	64014
	60	61015	62015	63015	64015
	75	61016	62016	63016	64016
	100	61017	62017	63017	64017
	150	61018	62018	63018	64018
	200	61019	62019	63019	64019
	250	61020	62020	63020	64020
	300	61021	62021	63021	64021
	400	61022	62022	63022	64022
	500	61023	62023	63023	64023
	600	61024	62024	63024	64024
	750	61025	62025	63025	64025
	800	61026	62026	63026	64026
	special*	61200	62200	63200	64200

measuring frequency 50/60 Hz

weight 350 g

* measuring range defined by customer

2. Auxiliary voltage 24 V DC

Type SWMU	Primary current A	Measuring output			
		0...20 mA and 0... 10 V	4...20 mA and 0... 10 V	0...20 mA and 2... 10 V	4...20 mA and 2... 10 V
41.52	1	65006	66006	67006	68006
	5	65007	66007	67007	68007
	10	65008	66008	67008	68008
	special*	65100	66100	67100	68100
41.51	15	65009	66009	67009	68009
	20	65010	66010	67010	68010
	25	65011	66011	67011	68011
	30	65012	66012	67012	68012
	40	65013	66013	67013	68013
	50	65014	66014	67014	68014
	60	65015	66015	67015	68015
	75	65016	66016	67016	68016
	100	65017	66017	67017	68017
	150	65018	66018	67018	68018
	200	65019	66019	67019	68019
	250	65020	66020	67020	68020
	300	65021	66021	67021	68021
	400	65022	66022	67022	68022
	500	65023	66023	67023	68023
	600	65024	66024	67024	68024
	750	65025	66025	67025	68025
	800	65026	66026	67026	68026
	special*	65200	66200	67200	68200

measuring frequency 50/60 Hz

weight 250 g

* measuring range defined by customer



3. Without auxiliary voltage supply

Type SWMU	Primary current A	Measuring output
		0... 20 mA and 0... 10 V
42.52	1	69006
	5	69007
	special*	69100
42.51	40	69013
	50	69014
	60	69015
	75	69016
	100	69017
	150	69018
	200	69019
	250	69020
	300	69021
	400	69022
	500	69023
	600	69024
	750	69025
	800	69026
	special*	69200

power requirements $P_E \geq 2.5 \text{ VA}$!

measuring frequency 50/60 Hz

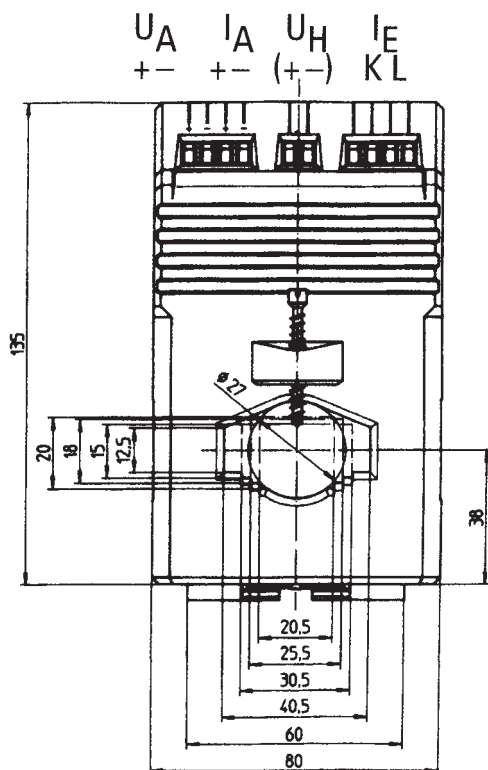
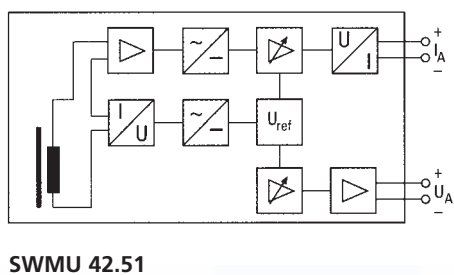
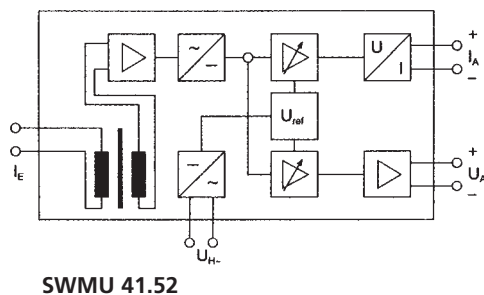
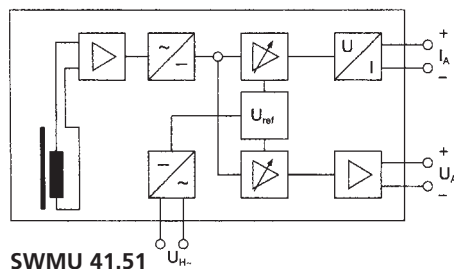
weight 600 g

operating range 15...120 % I_N

* measuring range defined by customer



Basic circuit diagrams



depth 50 (72) mm



mounting base for direct fitting without use of a 35 mm DIN rail (included in the delivery content)



NMC

Measuring transducer for AC currents

Clip-on measuring transducer for MBS current transformers in modular construction, versions with (NMC 2/3/4) or without auxiliary voltage supply (NMC-0)

Features/benefits

- measuring input: Sinus-shaped AC current (1 A or 5 A)
arithmetic mean value measurement, effective value calibrated
- measuring output: Unipolar output signal
- measurement principle: Rectifier process
- direct notching with MBS current transformers through contact studs
- economic wiring

Application

Measuring transducers for the transformation of sinus-shaped AC current. For an output signal a load-independent DC current and an imprinted DC voltage signal is available, which stands proportionally to the measurement value of the input volume. These signals can be used for display, recording, monitoring and or control function.

Simultaneously, the secondary current of the current transformers can be utilised to operate conventional needle instruments.

The measuring transducer fulfills the requirements and regulations with regard to the electromagnetic compatibility (EMV) and security (IEC 1010 and EN 61010). This measuring transducer has been designed, produced, and tested in accordance with ISO 9001.

Technical data NMC 0/2/3/4

measuring input 		auxiliary power 	
nominal frequency f_N	50/60 Hz	AC power supply	230 V $\pm 10\%$ (50 ... 60 Hz) or 110 V $\pm 10\%$ (50 ... 60 Hz)
rated input current I_N	1 A or 5 A	DC	24 V $\pm 15\%$
power input	≤ 1 VA	power input	≤ 1.5 W (2.5 VA)
from measuring circuit	(2.5 VA w/o auxiliary voltage)	accuracy	
overload capacity	1.2 I_N , constant 8 · I_N , <40 sec.	reference value	output end value
measuring output 		accuracy class	class 0.5
load-independent DC current	0 ... 20 mA or 4 ... 20 mA	accuracy range	NMC 2/3/4 1 ... 120 % I_N NMC 0 15 ... 120 % I_N
max. burden resistance	500 Ω	warming-up time	≤ 5 min.
max. burden voltage	≤ 15 V	protection	
current limit		electrocution protection	IP 40, housing (test wire, EN 60529) IP 20, connection terminals (test digit, EN 60529)
under overload	≤ 34 mA	contamination class	2
imprinted DC voltage	0 ... 10 V or 2 ... 10 V*	test voltages	4 kV, activ circuits against housing (DIN 57411) 4 kV, auxiliary voltage against measurement outputs (230 V AC-version) 500 V, auxiliary voltage against measurement output (24 V DC-version)
min. burden resistance	≥ 10 k Ω		
max. burden voltage			
under overload	≤ 18 V		
residual ripple			
of the output current	$\leq 1\%$ p.p.		
response time	< 500 ms		

*Live-Zero only with auxiliary voltage

Auxiliary voltage 24 V DC galvanically separated

measuring frequency 50/60 Hz; weight: 80 g; operating range 0 ... 120 % I_N

Auxiliary voltage 230 V AC galvanically separated

measuring frequency 50/60 Hz; weight: 80 g; operating range 0 ... 120 % I_N


Auxiliary voltage 110 V AC galvanically separated

measuring frequency 50/60 Hz; weight: 80 g; operating range 0 ... 120 % I_N



Without auxiliary voltage supply, power requirements ≥ 2.5 VA

measuring frequency 50/60 Hz; weight: 80 g; operating range 15 ... 120 % I_N




“A”



“B”/“C”



“D”

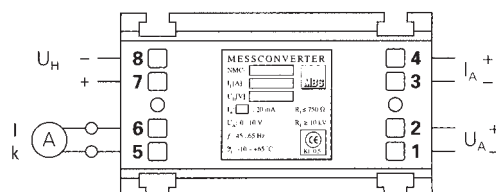

Comment: The dimensions of the measuring transducer are relevant only for the adaption to the existing current transformer construction types. All units consist of the same electronic modules.

NMC selection chart

Primary current A	Construction type				
	A		B	C	D
1					
5					
10			WSK 30		
15			WSK 40		
20					
25					
30					
40					
50					
60					
75					
80					
100					
125					
150					
200	ASK 41.3	ASK 318.3	ASK 31.3	ASR 22.3	ASK 21.3
250	sec. 1				
300	up to				
400	300 A				
500					
600					
750					
800					
1000					
1200					
1250					
1500					
1600					
2000					
2500					
3000					

NMC-AD

Adaptor for current transformers of any make to clip onto 35 mm DIN rail

Features/benefits


- accommodation of any make of current transformer in connection with transducers of type NMC
- direct mounting of measuring transducers, in visual deviation to the measuring point, onto an approved 35 mm DIN rail



Order instruction	Application with NMC art.-no.
36011	39xx2; 36xx1/2; 37xx2; 76xx2
weight: 70 g	

connection	description.
6, 7	incoming terminals 5 A or 1 A (sourced from current transformers)

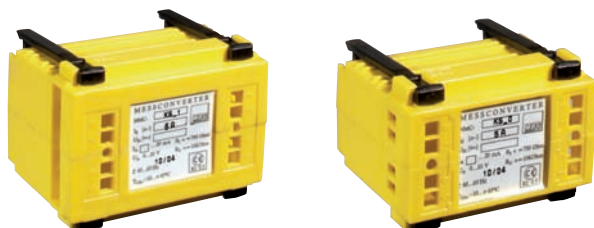Short circuit adaptor NMC-KSx



Application


Adaptors of type NMC-KSx are clipped onto current transformers. When the secondary circuit of a current transformer is not being energized the adaptors prevent idling of the transformer, and thus the occurrence of high neutral voltages in the nominal current of the current transformer.

Type NMC-KSx	Art.-no.	Applicable with MBS current transformer types													Drawing
		WSK	WSK	ASR	ASK	ASK	ASK	ASK	ASK	ASK	ASK	ASK	ASK	ASK	
		30	40	22.3	21.3	31.3	41.3	41.4	421.4	61.4	63.4	81.4	101.4	105.6	
0	39090	●		●	●	●	●								A
1	39091		●												B
2	39092							●	●						C
3	39093									●	●	●	●	●	D

FASK

Flexible Clip-On Current Transformers

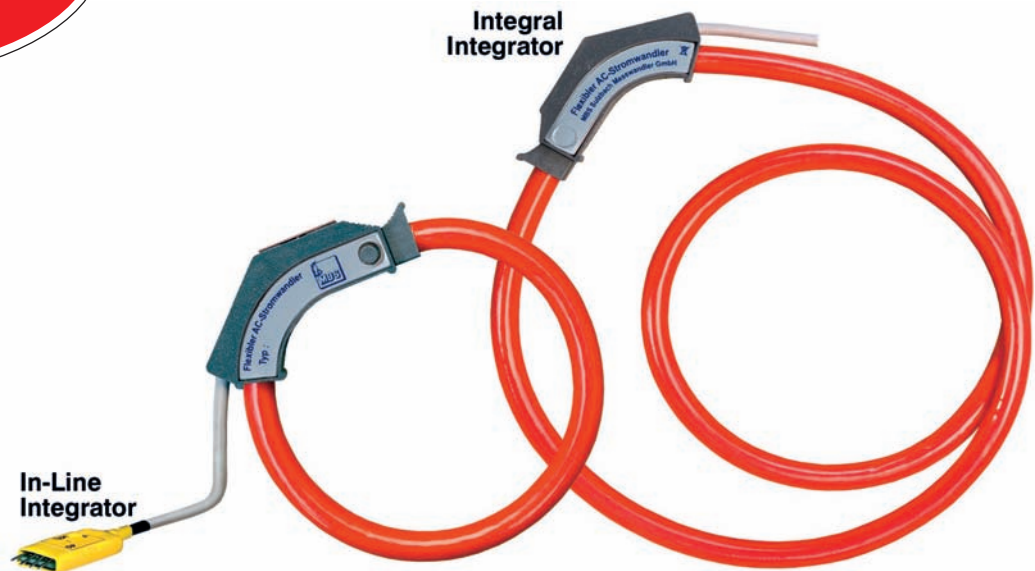New

**Measuring principle:**

Rogowski Coil with or without integral integrator/amplifier

Application:

The FASK current transformer is manufactured to cover a wide range of lengths, current ranges and output levels to standard or OEM specifications.

Very low phase errors with true rms voltage output from the integrator enable the FASK Transformer to be used in a wide variety of current or kW/kWh measurement applications.

Compared with the conventional iron cored CT, the FASK has minimal weight and is narrow enough to clip on to all types of phase conductors even in very tight and crowded cubicles. Mounting hardware is not required, FASK is simple to secure in position using cable ties.

These CT's were the first to offer a hybrid integrator/buffer amplifier embedded in the clip assembly. This is digitally calibrated to provide a high linearity output characteristic. The absence of an iron core means that the FASK displays no hysteresis, iron loss or turns ratio errors. The FASK cannot magnetically saturate, there is no shock or damage hazard on open circuit. The low voltage output signal can be routed up to 25m. to a meter, portable instrument, energy logger or BMS outstation, without any loss of accuracy.

The FASK is a high accuracy CT particularly with the conductor centrally positioned within the measurement coil. Its linearity provides a wide dynamic range, this enables accuracy to be maintained at the same level from the maximum current rating to around a 5% of this rating.



FA SK

Flexible Clip-On Current Transformers

Standard Product Availability

FA SK production range, external power source 5 V, 9 V, 12 V, 24 V DC

Standard type	F302	F305	F4010	F6020	F7530	F10030
length [cm]	30	30	40	60	75	100
Current range Ip. [A]	200	500	1000	2000	3000	3000
Min. recommended Amps	10	20	20	40	50	50
Coil diameter closed [mm]	75	75	110	160	200	300
Rectangular coil [mm]	20 x 85	30 x 120	30 x 120	60 x 200	60 x 250	60 x 400
Maximum loops	1	1	1	2	3	3/4

Output Voltage	Integral Integrator	In-line pod integrator			No Integrator
Full Scale output, Suffix	/05=500 mV AC	/1=1 V AC	/2=2 V AC	/3=3 V AC	0.21 mV/A
External power source	5 V DC reg	5 V DC reg	9 V DC	12 V DC	without

Non-standard options

Any standard lengths (above) can be calibrated to any current range (in normal 100 A steps).

Output sensitivities selectable from 100–3000 mV AC FSD for any CT (note required power source).

Construction characteristics:

Mouldings:	HIPS Plastics, IP40 Protection, Pollution degree PD2
Winding/Coil former	Dual helical winding 330 turns/25mm on HPDF flexible former
Sleeve material	PVC double insulation, wear indicator to IEC61010-1, Cat 3/600 V. Colour Red. Special colours subject to minimum quantity order
Coil sheath diameter	11 mm, plug width 14 mm
Isolation test voltage	3.5 kV, 6.5 kV peak 1,2/50 μ s, IEC61010-2-032 Type B transducer
Bend radius	30 mm minimum: number of loops see table above
Operating temp.	-20 °C to +85 °C, Humidity 0–95 % non condensing
Weight inc. 2 m lead	Fxx 30–120 g ----- Fxx 100–250 g.

Measuring characteristics At 25 °C. PF 0.7–1.0, 50/60 Hz between 10 % & 100 % of Ip

Current range	100 A – 3000 A Standard range, 10 kA – 100 kA extended range
Frequency range	Coil plus integrator: 25Hz-5kHz +/-2dB Max, typ.-1dB.
Accuracy	+/-3 % FS Ip. +/-1.5 % of reading FS Ip to >10 % Ip.
Phase shift	Max 1 °, typical < 0.5 °.
External Field	Full rejection adjacent bus > 1 x diameter away., conductor centralised
Output AC voltage	True rms value. Full scale value selectable, see table above
Output DC option	4–20 mA DC (2 wire), 0–1 V DC, 0–5 V DC (3 wire) for current/ kVA applications

External Power Source Integrator supply normally derived from host meter/instrument

Voltage	5 V DC regulated, 9, 12, 24 V DC unregulated.
Current	Typical 0.75–1.0 mA
Output leads	Red = + V supply, Yellow = Signal, Blue = 0 V Screen ground
Lead/cord length	2 m standard, extendable to 15 m

EMBSIN

Measuring transducers for electrical variables



MBS's measuring transducers of the type EMBSIN transforms an input alternating voltage and/or an input alternating current, received as a standard signal from a current transformer, – or voltage transformer, or from the power system, into a load imprinted output voltage.

The various EMBSIN units are arranged to collate all measuring variables, which are necessary to monitor and to control, the power supply and consumption, to display the output signals, or to accept these into other units of the measuring- and control technic.

Several units such as indicators, recorders or signal processing systems can be connected to the output. The transducer's configuration assures a safe diversion for all functions for a galvanic separation between inputs and outputs. The most important applications for the transducers are in the generation and distribution of energy, in the manufacturing industry, and panel building enterprises.

The transducers have been developed upon an entirely new housing technology concept and are available in 5 different sizes.

The housing material made of high quality polycarbonate are **free of silicon as well as halogen** and, are flame resistant. High quality screw terminals are provided for the safe connections of inputs and outputs. Fitment onto the base wall is made with a 35 mm DIN rail. All electrical connections are made at the top of the units for safe and easy access.

The transducers bear the CE symbol. This symbol provides the highest level of protection for humans, the machine, as well as the environment, and of course, comply with all applicable safety regulations. MBS's production of high current measuring transducers, made of the finest quality enjoy a long tradition and a distinguished world wide reputation. The encapsulated housing design, the carefully chosen material and the construction principles, contribute that the measuring transducers are protected against climatic conditions (temperature and humidity), atmospheric conditions (chemical processes, dust and salt), vibration and shocks, interruptions (electrical or mechanical), HF interferences (communications) as well as permanent or transient interference voltages on all electrical connections.

• Compact • Safety • Easy to use • Accurate • Better

Safety

EN 61010 also on the terminals!
690 V max. input voltage
housing material: Polycarbonate
fire resistance class: V-0 acc. to UL94
(self-extinguishing, halogen-free, silicon-free)

Easy to use

Units with two wide-and auxiliary power ranges
24 ... 65 V AC/DC or 85 ... 230 V AC/DC auxiliary
power, to be connected either on the top or on the bot-
tom cos φ or linear recalibrating/ can be synchronized
without opening the unit and without AC calibrators!
mounting onto 35 mm DIN rail
operating instructions are included

Compact

height 75 mm, V-series
height 60 mm
depth 105 mm, V-series
depth 112 mm
width 45 mm, V-series
width 105 mm for power,
70 mm for frequency and phase as well as
U and I with wide-range auxiliary
power
35 mm two-wire feed 24 V DC or 230 V AC
35 mm for current and voltage without
auxiliary power supply
100 mm EMBSIN 391 PV

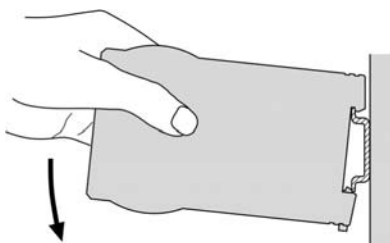
Accuracy

All units class 0.5
EMBSIN 241 FV class 0.2
EMBSIN 241 F class 0.2
EMBSIN 241 FD class 0.2



Better

Highest quality and safety at very competitive prices


assembly



dismantling

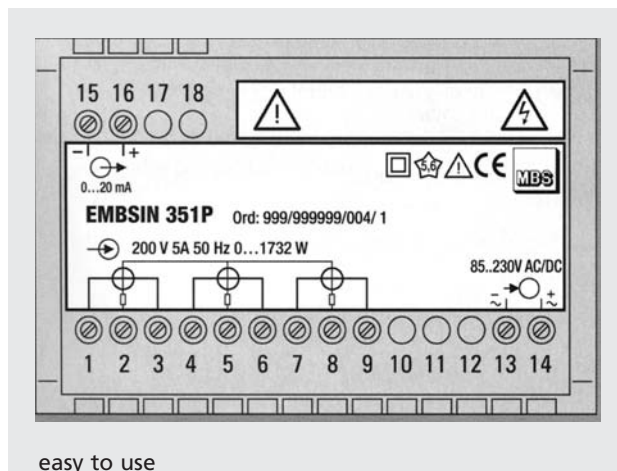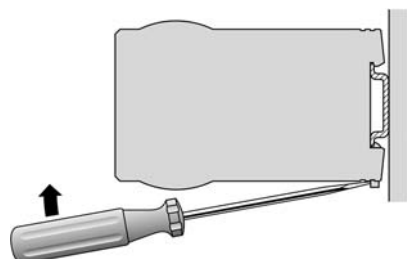


easy to use

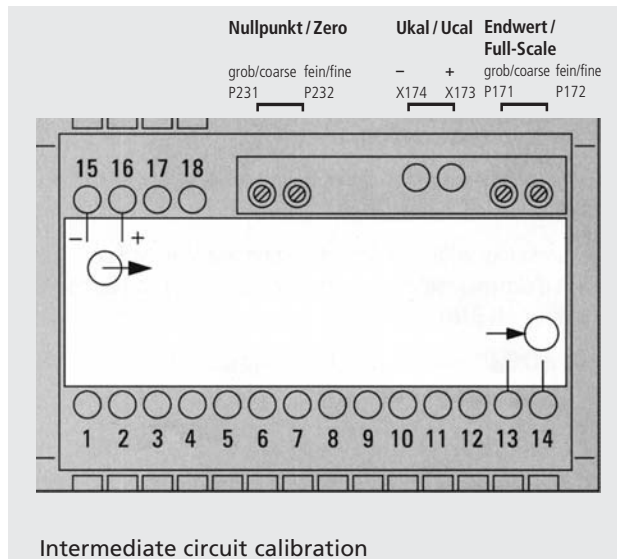

Intermediate circuit calibration

EMBSIN 100 IV

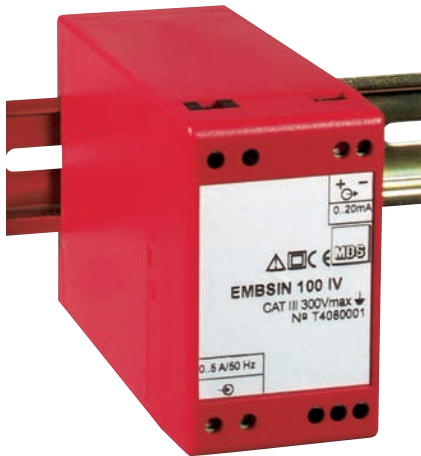Measuring transducers for AC current



- without auxiliary voltage supply
- housing for 35 mm DIN rail mounting

Features/benefits

- measuring input: Sinus-shaped alternating current (0...1 or 0...5 A) programmable at source
- measuring output: Unipolar output signal
- measuring principle: Rectifier mean value measurement process
- without auxiliary voltage supply
- economic consumption

Application

Measuring transducer for the proportional transformation of sinus-shaped alternating currents into a load-independent DC signal. The output signal is adjustable for analogue and digital units.

Technical data EMBSIN 100 IV

measuring input 	
rated frequency f_N	50/60 Hz
rated input current I_N	0...1 bis 0...7.5 A
consumption	≤ 2 VA
overload capacity	$1.2 \cdot I_N$, constant $20 \cdot I_N$, 1 sec.
measuring output 	
load-independent	0...5, 0...10 or
DC current I_{ON}	0...20 mA
burden voltage	≤ 15 V
burden resistance	$R_{Bmax} = \frac{15V}{I_{ON} [mA]}$ k Ω
residual ripple	
of the output current	≤ 1 % p.p.
response time	≤ 300 ms
accuracy	
reference value	output end value
accuracy class	class 0.5
measuring range	0...100 %
reference conditions	
ambient temperature	15...30 °C
input signal	0...100 %
frequency	45...65 Hz

connection conditions

low voltage application feed by means of a low voltage current transformer

high voltage application feed by means of a high voltage current transformer

connection terminals ≤ 4.0 mm² solid wire
 $\leq 2 \times 2.5$ mm² fine wire

safety

protection class II, (protection isolated, DIN EN 61010)

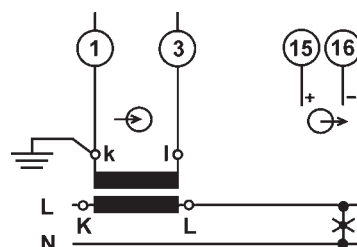
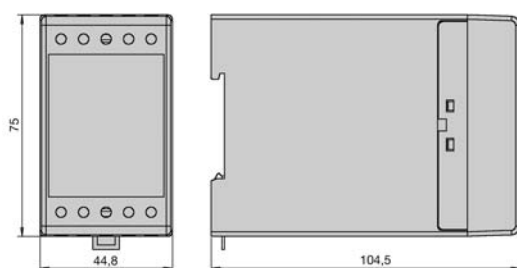
nominal isolation voltage 300 V, rms, connection category III
 500 V, rms, connection category II

test voltage 3.7 kV, rms
 in acc. with EN 61010-1:1990

electrocution protection IP 40, housing
 (test wire, EN 60529)
 IP 20, connection terminals
 (test digit, EN 60529)

weight ≤ 250 g

Order information see page 271



EMBSIN 100 I

Measuring transducers for AC current



- without auxiliary voltage supply
- with 2 measuring ranges
- housing for 35 mm DIN rail mounting

Features/benefits

- measuring input: Sinus-shaped alternating current (0...1/5 A or 0...1.2/6 A, selectable at terminals), arithmetical mean value measurement, effective value calibration
- measuring output: Output signal unipolar
- measuring principle: Rectifier mean value measurement process
- without auxiliary voltage supply
- economic consumption


Application


Measuring transducer for the transformation of sinus-shaped alternating current. A load-independent DC signal which is proportional to the measurement value serves as an output signal, and allows for display, recording, monitoring and/or control functions. This measuring transducer fulfills the requirements and regulations with regard to the electromagnetic compatibility (EMV) and safety (IEC 1010 and EN 61010).

Technical data EMBSIN 100 I

measuring input →		accuracy →	
rated frequency f_N	50/60 Hz	reference value	output end value
rated input current I_N	1/5 A or 1.2/6 A, selectable	accuracy class	class 0.5
consumption	≤ 2.5 VA	input	0 ... 100 %
overload capacity	1.2 · I_N , constant, 20 · I_N , 1 sec.	temperature influence (-10 ... + 55 °C)	0.2 % / 10 K
measuring output →		safety	
load-independent	0 ... 5, 0 ... 10 or	protection class	II, (protection isolated, DIN EN 61010)
DC current	0 ... 20 mA	electrocution protection	IP 40, housing (test wire, EN 60529) IP 20, connection terminals (test digit, EN 60529)
burden voltage	≤ 15 V	contamination class	2
voltage limit		overvoltage category	III
by $R_{ext} = \infty$	≤ 30 V	nominal isolation	250 V input
current limit		voltage (to earth)	40 V output
under overload	≤ 34 mA	weight	270 g
residual ripple			
of the output current	≤ 1 % p.p.		
response time	≤ 300 ms		

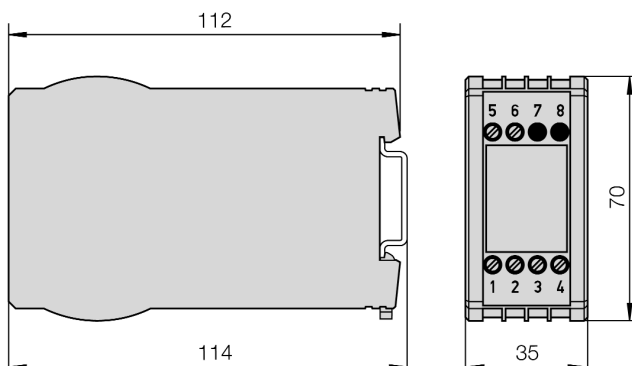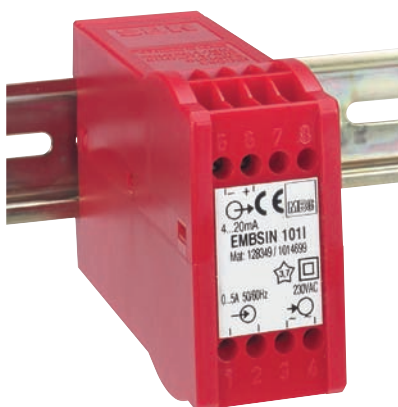Order information see page 271





EMBSIN 101 I

Measuring transducers for AC current

- with auxiliary voltage supply
optional with measuring output 4...20 mA
and / or 2-wire technic
- housing for 35 mm DIN rail mounting

Features/benefits


- measuring input: Sinus-shaped alternating current, arithmetical mean value measurement, effective value calibration
- measuring output: Unipolar and live-zero output signals
- measuring principle: Rectifier mean value measurement process
- AC or DC auxiliary power supply

Application

Measuring transducer for the transformation of sinus-shaped alternating current. A load-independent DC signal or imprinted DC voltage signal is available, which stands proportionally to the measurement value of the input volume. This measuring transducer fulfills the requirements and regulations with regard to the electromagnetic compatibility (EMV) and safety (IEC 1010 and EN 61010).

Technical data EMBSIN 101 I


measuring input →		auxiliary power →	
rated frequency f_N	50/60 Hz	AC	24, 110, 115, 120, 230 or 400 V, ±15 %, 50 or 60 Hz; Pv approx. 3 VA
rated input current I_N	0 ... 0.8 to 0 ... 1.2 A or 0 ... 4 to 0 ... 6 A	DC	24 V, - 15 / + 33 % or 24 V, - 50 / + 33 % by 2-wire feed and output 4 ... 20 mA; Pv approx. 1.5 W
consumption	≤ 5 mV I_N	universal power supply ranges	DC or AC 40 ... 400 Hz 85 ... 230 V 24 ... 60 V
overload capacity	2 · I_N , constant		
measuring output →			
load-independent DC current	0 ... 2.5 mA to 0 ... 20 mA or live-zero 1 ... 5 to 4 ... 20 mA	accuracy	reference value output end value
burden voltage	≤ 15 V	accuracy class	class 0.5
by 2-wire connection	standard range 4 ... 20 mA, external resistance R_{ext} , dependent of the auxiliary supply H (12 ... 32 V DC) $R_{ext \max} [k\Omega] = \frac{H [V] - 12 V}{20 \text{ mA}}$	safety	protection class II, (protection isolated, DIN EN 61010)
imprinted DC voltage	0 ... 5 to 0 ... 10 V or live-zero 1 ... 5 to 2 ... 10 V	electrocution protection	IP 40, housing (test wire, EN 60529), IP 20 connection terminals (test digit, EN 60529)
load capacity	max. 20 mA	contamination class	2
voltage limit by $R_{ext} = \infty$	≤ 40 V	overvoltage category	III
current limit	< 30 mA by current output	nominal isolation voltage	300 V, input (to earth) 300 V, auxiliary power AC 50 V, auxiliary power 24 V DC 50 V, output
under overload	approx. 20 mA by voltage output		
residual ripple of the output current	≤ 1 % p.p.	weight	195 g
response time	< 300 ms		



Order information see page 272

EMBSIN 201 IEV

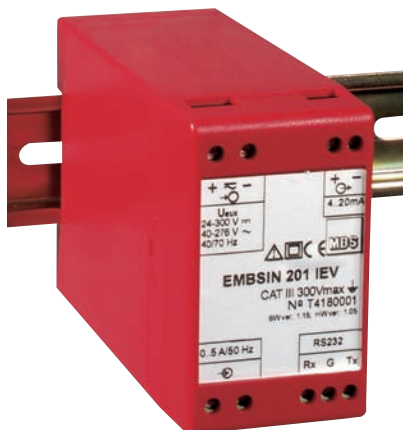Measuring transducers for AC current



- with auxiliary voltage supply
- housing for 35 mm DIN rail mounting

Features/benefits

- measuring input: Sinus-shaped alternating current (0...6 A)
- measuring of the true rms value of alternating currents!
- programmable measuring inputs and measuring outputs via RS232 or RS485 interface (option)
- low consumption
- universal AC/DC auxiliary voltage supply or AC auxiliary voltage

Application

Measuring transducer for the proportional transformation of sinus-shaped alternating currents into a load-independent DC current signal or AC voltage signal. The analogue output signal is proportionable to the true rms value of the measuring variables and can be used for regulating analogue and digital units.

Technical data EMBSIN 201 IEV

measuring input

rated frequency f_N	50/60 Hz
Rated input current I_N	0...0.2 A to 0...6 A
own consumption	< 0,5 VA
operating temperature range	-10 °C ≤ ϑ ≤ +55 °C
overload capacity	2 · I_N , constant 20 · I_N , 1 sec.

measuring output

load-independent DC current	0 ... 1 to 0 ... 20 mA or live-zero 0.2 ... 1 to 4 ... 20 mA
burden voltage	≤ 15 V
imprinted DC voltage	0 ... 1 to 0 ... 10 V or live-zero 0.2 ... 1 bis 2 ... 10 V
load capacity	max. 20 mA
output signal limit	
current output	125 % I_{AN}
voltage output	125 % U_{AN}
residual ripple	
of the output current	≤ 1 % p.p.
response time	< 300 ms

auxiliary power

universal power supply	DC or AC 40...70 Hz universal
voltage ranges	24 ... 300 V DC and 40 ... 276 V AC
AC power supply	45 ... 65 Hz
rated voltages:	57,74 V, 100 V, 230 V, 400 V, 500 V
power input	≤ 3 VA

accuracy

reference value	end value of input signal
accuracy class	class 0.5

reference conditions

ambient temperature	15...30 °C
input signal	0...100 % I_N
frequency	45...65 Hz



protection

protection class	II
	300 V, rms, connection category III
	500 V, rms, connection category II
contamination class	2
test voltage	3 kV, rms (acc. IEC 61010-1: 1990)
electrocution protection	IP 40, housing (test wire, EN 60529) IP 20, connection terminals (test digit, EN 60529)

interface

(optional)	RS232, MODBUS RTU RS485, MODBUS RTU
connection terminals	≤ 4.0 mm ² single wire ≤ 2 x 2.5 mm ² Litze
weight	approx. 300 g

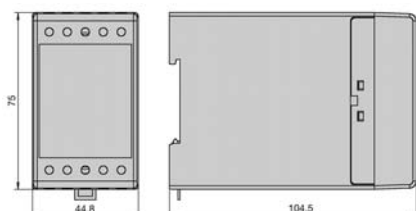Order information see page 273




	RS232	
	9-pole plug (SUB-D)	25-pole plug
Rx (21)	Tx (3)	Tx (2)
⊥ (22)	GND (5)	GND (7)
Tx (23)	Rx (2)	Rx (3)
	RS485	
	A (21)	DATA +
	C (22)	NC ¹⁾
B (23)		DATA -

1) -NC- do not connect!

EMBSIN 201 IE

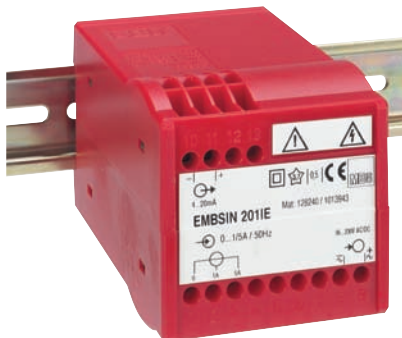Measuring transducers for AC current



- with auxiliary voltage supply
- effective value measuring
- with 2 measuring ranges
- housing for 35 mm DIN rail mounting

Features/benefits

- measuring input: Sinus-shaped alternating current (0...1/5 A or 0...1.2/6 A, selectable at terminals), or distorted, effective value measuring
- measuring output: Unipolar and live-zero output signals
- measuring principle: Logarithmetical process
- universal power supply


Application

Measuring transducer for the transformation of sinus-shaped or distorted alternating currents. A load-independent DC current signal or imprinted DC voltage signal is available, which is proportionally arranged to the rms input volume. The measuring transducer fulfills the requirements and regulations with regard to the electromagnetic compatibility (EMV) and safety (IEC 1010 or EN 61010).

Technical data EMBSIN 201 IE

measuring input 		auxiliary power 	
rated frequency f_N	50 / 60 or 400 Hz	universal power supply	DC or 40 ... 400 Hz
rated input current I_N	1/5 A or 1.2/6 A, selectable	AC / DC ranges	24 ... 60 V or 85 ... 230 V
consumption	≤ 1 VA	AC power supply	45 ... 65 Hz
operating temperature range	$-10^\circ\text{C} \leq \vartheta \leq +55^\circ\text{C}$	power input	≤ 1.5 W (3 VA)
overload capacity	$1.2 \cdot I_N$, constant $20 \cdot I_N$, 1 sec.	accuracy	
measuring output 		reference value	output end value
load-independent DC current	0 ... 1 to 0 ... 20 mA or live-zero 0.2 ... 1 to 4 ... 20 mA	accuracy class	class 0.5
burden voltage	≤ 15 V	peak value factor	$\sqrt{2}$
external resistance	$R_{\text{Bmax}} = \frac{15\text{V}}{I_{\text{AN}}[\text{mA}]} \text{ k}\Omega$	warming-up time	≤ 5 min
imprinted DC voltage	0 ... 1 to 0 ... 10 V or live-zero 0.2 ... 1 to 2 ... 10 V	safety	
load capacity	max. 2 mA	protection class	II, (protection isolated, DIN EN 61010)
external resistance	$R_{\text{Bmin}} = \frac{U_A[\text{V}]}{2 \text{ mA}} \text{ k}\Omega$	electrocution protection	IP 40, housing (test wire, EN 60529) IP 20, connection terminals (test digit, EN 60529)
voltage limit		contamination class	2
by $R_{\text{ext}} = \infty$	≤ 25 V	overvoltage category	III
current limit	approx. $1.5 \cdot I_{\text{AN}}$	nominal isolation voltage	300 V, input (to earth) 230 V, auxiliary power 40 V, output
under overload	by current output, approx. 10 mA, by voltage output	weight	250 g
residual ripple	≤ 0.5 % p.p. by response time 300 ms		
of the output current	≤ 2 % p.p. bei response time 50 ms		
response time	50 ms or 300 ms		

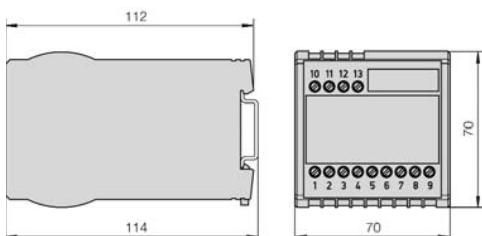Order information see page 275



EMBSIN 120 UV

Measuring transducers for AC current



- without auxiliary voltage supply
- housing for 35 mm DIN rail mounting

Features/benefits

- measuring input: Sinus-shaped alternating voltage (0...20 A or 0...500 V)
- measuring output: Unipolar output signal
- measuring principle: Rectifier mean value measurement process
- without auxiliary voltage supply
- economic consumption



Application

Measuring transducer for the transformation of sinus-shaped alternating currents into a load-independent DC current signal, which is arranged proportionally to the input volume and is adaptable to be used for analogue and digital units.

Technical data EMBSIN 201 IE

measuring input 		reference conditions	
rated frequency f_N	50/60 Hz	ambient temperature	15 ... 30 °C
rated input voltage U_N	0 ... 20 to 0 ... 500 V	input signal	20 ... 100 % U_N
	linked voltage!	frequency	45 ... 65 Hz
	max. input voltage	connection conditions	
	to earth 250 V	low voltage application	direct or via voltage transformer with a nominal performance
consumption	≤ 2 VA		$P \geq 5$ VA
operating temperature range	-10 °C ≤ ϑ ≤ +55 °C	high voltage application	via high voltage current transformer with $P \geq 5$ VA
relative average humidity	≤ 75 %	connection terminals	
overload capacity	1.2 · U_N , constant		≤ 4,0 mm ² solid wire
	2.0 · U_N , 1 sec.		≤ 2 x 2.5 mm ² Litze
measuring output 		safety	
load-independent	0 ... 5, 0 ... 10 or	protection class	II, (protection isolated, DIN EN 61010)
DC current I_{ON}	0 ... 20 mA	nominal isolation voltage	300 V, rms, connection category III
burden voltage	≤ 15 V		500 V, rms, connection category II
residual ripple		test voltage	3.7 kV, rms
of the output current	≤ 1 % p.p.		acc. to EN 61010-1: 1990
response time	≤ 300 ms	electrocution protection	IP 50, housing
external resistance	$R_{Bmax} = \frac{15V}{I_{AN}[mA]}$ kΩ		(test wire, EN 60529)
accuracy			IP 20, connection terminals
reference value	output end value		(test digit, EN 60529)
accuracy class	class 0.5	weight	250 g

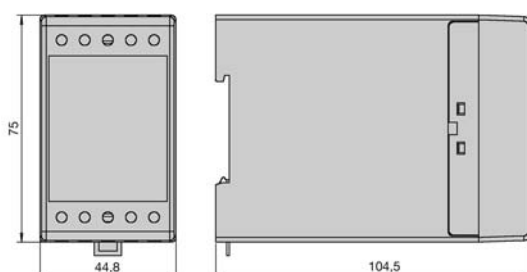Order information see page 276



EMBSIN 120 U

Measuring transducers for alternating voltage



- without auxiliary voltage supply
- housing for 35 mm DIN rail mounting

Features/benefits

- measuring input: Sinus-shaped alternating voltage (0...20 A to 0...500 V), arithmetical mean value measurement, effective calibrated
- measuring output: Unipolar output signal
- measuring principle: Rectify process
- without auxiliary voltage supply
- minimal wiring

Application


Measuring transducer for the transformation of sinus-shaped alternating voltage. A load-independent DC current signal, which is proportionally to the measurement value, serves as an output signal, and allows for the display, recording, monitoring and/or control function.

The measuring transducer fulfills the requirements and regulation with regard to the electromagnetic compatibility (EMV) and safety (IEC 1010 or EN 61010).

Technical data EMBSIN 120 U

measuring input		accuracy	
rated frequency f_N	50/60 Hz	reference value	output end value
rated input voltage U_N	0 ... 20 to 0 ... 500 V	accuracy class	class 0.5
	linked voltage!	input signal	20 ... 100 %
	max. input voltage	temperature influence	
	to earth 250 V	(-10 ... +55 °C)	0.2 % / 10 K
consumption	≤ 2 VA	safety	
overload capacity	1.2 · U_N , constant 2.0 · U_N , 1 sec.	protection class	II, (protection isolated, DIN EN 61010)
measuring output		electrocution protection	IP 40, housing (test wire, EN 60529) IP 20, connection terminals (test digit, EN 60529)
load-independent DC current I_{AN}	0 ... 5, 0 ... 10 or 0 ... 20 mA	contamination class	2
burden voltage	≤ 15 V	nominal isolation voltage	300 V, rms, connection categorie III 500 V, rmsm connection categorie II
burden resistance	$R_{Bmax} = \frac{15V}{I_{AN}[mA]} \text{ k}\Omega$	weight	260 g
voltage limit			
$R_{ext} = \infty$	≤ 54 V		
current limit			
under overload	≤ 1.7 · I_N		
residual ripple			
of the output current	≤ 1 % p.p.		
response time	≤ 300 ms		

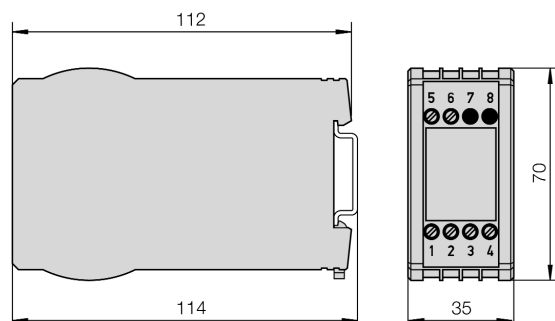Order information see page 276



EMBSIN 121 U

Measuring transducers for alternating voltage



- with auxiliary voltage supply
optional measuring output 4...20 mA and/or
2-wire technic
- housing for 35 mm DIN rail mounting

Features/benefits


- measuring input: Sinus-shaped alternating voltage
arithmetical mean value measurement, effective calibrated
- measuring output: Unipolar and live-zero output signal
- measuring principle: Rectifier process
- AC or DC auxiliary power

Application

Measuring transducer for the transformation of sinus-shaped alternating voltage. A load-independent DC current signal or imprinted DC voltage signal is available which stands proportionally to the measurement value of the input volume. The measuring transducer fulfills the requirements and regulation with regard to the electromagnetic compatibility (EMV) and safety (IEC 1010 or EN 61010).


Technical data EMBSIN 201 IE

measuring input →		auxiliary power →○	
rated frequency	50/60 Hz	AC	24, 110, 115, 120, 230 or 400 V, ± 15 %, 50/60 Hz; approx. 3 VA
rated input voltage U_N	0 ... 50 to 0... 600 V linked voltage! max. 300 V nominal value of the mains to earth (operating voltage acc. to EN 61010)	DC	24 V, -15/+ 33 % or 24 V, - 50/+ 33 % by 2-wire feed and output 4 ... 20 mA; approx. 1.5 W
consumption by		universal power supply ranges	DC or AC 40 ... 400 Hz 85 ... 230 V 24 ... 60 V
$U_N \leq 150$ V	$< U_N \cdot 50 \mu A$	accuracy	
150 V $< U_N \leq 400$ V	$< U_N \cdot 20 \mu A$	reference value	output end value
400 V $< U_N \leq 600$ V	$< U_N \cdot 5 \mu A$	accuracy class	class 0.5 ($U_N \leq 500$ V) class 1 ($U_N > 500$ V)
overload capacity	1.2 · U_N , constant 2.0 · U_N , 1 sec.	safety	
measuring output →		protection class	II, (protection isolated, DIN EN 61010)
load-independent DC current	0 ... 2.5 mA to 0 ... 20 mA or live-zero 1 ... 5 to 4 ... 20 mA	electrocution protection I	P 40, housing (test wire, EN 60529) IP 20, connection terminals (test digit, EN 60529)
burden voltage	≤ 15 V	contamination class	2
by 2-wire connection	standard range 4 ... 20 mA external resistance R_{ext} , dependent of the auxiliary power H (12 ... 32 V DC) $R_{ext,max.}[k\Omega] = \frac{H[V]-12 V}{20 mA}$	overvoltage category	III
imprinted DC voltage	0 ... 5 bis 0 ... 10 V or live-zero 1 ... 5 to 2 ... 10 V	nominal isolation voltage (to earth)	300 V, input 300 V, auxiliary power AC 50 V, auxiliary power 24 V DC 50 V, output
load capacity	max . 20 mA	weight	280 g
voltage limit			
by $R_{ext} = \infty$	≤ 40 V		
current limit	< 30 mA by current output		
under overload	approx. 20 mA by voltage output		
residual ripple			
of the output current	≤ 1 % p.p.		
response time	< 300 ms		

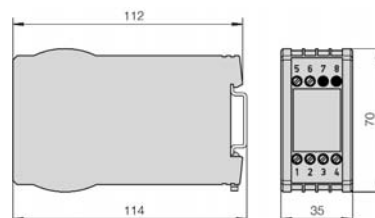

EMBSIN 221 UEV

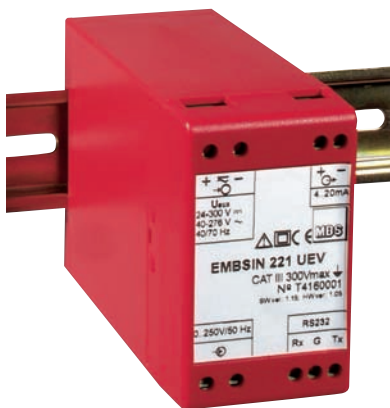Measuring transducers for alternating voltage



- with auxiliary voltage supply
- housing for 35 mm DIN rail mounting

Features/benefits

- measuring input: Sinus-shaped alternating voltage (0...50 to 0...500 V)
- measuring output: Unipolar and live-zero output signal
- measuring principle: Digital, true rms measuring
- with auxiliary voltage supply via AC/DC supply or AC supply
- economical consumption
- programmable measuring input and output via optional serial interface RS 232/ RS485




Application

Measuring transducer for the transformation of sinus-shaped or distorted alternating voltage into a load-independent DC current- or DC voltage signal. The analogue output signal is proportionally to the true rms value of the measuring variables and can be used for regulating analogue and digital units. The input and output volumes can be configured via an interface RS232 or RS485 by means of a parametrical software „MBSET“. Before setting the parameter, the output ranges have to be tuned via jumpers. There is a choice of 3 output signals.

Technical data EMBSIN 221 UEV

measuring input		auxiliary power	
rated frequency	50/60 Hz	universal power supply	DC or AC 40...70 Hz universal
rated input voltage U_N	0 ... 50 to 0 ... 500 V	voltage ranges	24 ... 300 V DC and 40 ... 276 V AC
consumption	< 0.5 VA	AC power supply	45 ... 65 Hz
overload capacity	1.2 · U_N , constant 2.0 · U_N , 1 sec.	rated voltages:	57,74 V, 100 V, 230 V, 400 V, 500 V
measuring output		power input	≤ 3 VA
load-independent DC current I_{ON}	0 ... 1 to 0 ... 20 mA or live-zero 0.2 ... 15 to 4 ... 20 mA	accuracy	
burden resistance	$R_{b,max.} = \frac{15 \text{ V}}{I_{ON}[mA]} \text{ k}\Omega$	reference value	output end value
burden voltage	≤ 15 V	accuracy class	class 0.5
imprinted DC voltage U_{ON}	0 ... 1 to 0 ... 10 V or live-zero 0.2 ... 1 to 2 ... 10 V	reference conditions	
burden resistance	$R_{b,min.} = \frac{U_{ON}[V]}{20 \text{ mA}}$	ambient temperature	15 ... 30 °C
load capacity	max. 20 mA	input signal	0 ... 100 % I_N
output signalling limit		frequency	45...65 Hz
current output	125 % I_{AN}	safety	
voltage output	125 % U_{AN}	protection class	II 300 V, rms, connection category III 500 V, rms, connection category II
residual ripple		contamination class	2
of the output current	≤ 1 % p.p.	test voltage	3 kV, rms, (acc. to IEC 61010-1:1990)
response time	≤ 300 ms	electrocution protection I	P 40, housing (test wire, EN 60529) IP 20, connection terminals (test digit, EN 60529)
		interface	RS232, MODBUS RTU (optional) RS485, MODBUS RTU
		connection terminals	≤ 4.0 mm ² single wire ≤ 2 x 2.5 mm ² Litze
		weight	approx. 300 g

Order information see page 273



RS232		
	9-pole plug (SUB-D)	25-pole plug
Rx (21)	Tx (3)	Tx (2)
⊥ (22)	GND (5)	GND (7)
Tx (23)	Rx (2)	Rx (3)
RS485		
A (21)	DATA +	
C (22)	NC ¹⁾	
B (23)	DATA -	

1) -NC- do not connect !

EMBSIN 221 UE

Measuring transducers for alternating voltage



- with auxiliary voltage supply
- effective value measuring
- housing for 35 mm DIN rail mounting

Features/benefits

- measuring input: Alternating voltage (0...20 to 0...690 V) sinus-shaped or distorted, effective value measuring
- measuring output: Unipolar and live-zero output signals
- measuring principle: Logarithmetical process
- AC/DC auxiliary power by means of universal power supply

Application


Measuring transducer for the transformation of sinus-shaped or distorted alternating voltages. A load-independent DC current signal or imprinted DC voltage signal is available, which is proportionally arranged to the rms measurement value of the input volume.

The measuring transducer fulfills the requirements and regulations with regard to the electromagnetic compatibility (EMV) and safety (IEC 1010 or EN 61010).

Technical data EMBSIN 221 UE

measuring input 		auxiliary power 	
rated frequency f_N	50/60 Hz or 400 Hz	universal power supply	DC or AC (40 ... 400 Hz)
rated input voltage U_N	0 ... 20 to 0 ... 690 V (max. 264 V by auxiliary power from voltage measuring input) max. input voltage to earth 400 V	AC/DC ranges	85 ... 230 V or 24 ... 60 V DC - 15 % / + 33 % AC ± 15 %
consumption	≤ 1 VA	power input	≤ 1.5 W (3 VA)
overload capacity	$1.2 \cdot U_N$, constant, $2.0 \cdot U_N$, 1 sec.	accuracy	
		reference value	output end value
		accuracy class	class 0.5
		peak value factor	$\sqrt{2}$
		warming-up time	≤ 5 min.
		safety	
		protection class	II, (protection isolated, DIN EN 61010)
		electrocution protection	IP 40, housing (test wire, EN 60529) IP 20, connection terminals (test digit, EN 60529)
		contamination class	2
		overvoltage category	III
		nominal isolation voltage (to earth)	400 V, input 230 V, auxiliary power 40 V, output
		weight	300 g

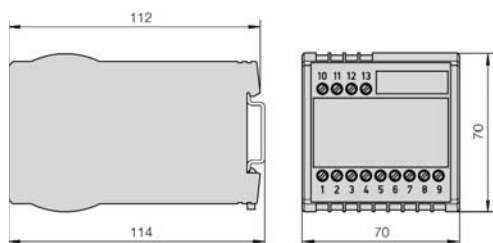Order information see page 275



EMBSIN 241 FV

Measuring transducers for frequency



- with auxiliary voltage supply
- housing for 35 mm DIN rail mounting

Features/benefits

- Measuring transducer for measuring the frequency of sinus-shaped alternating voltages
- programmable measuring inputs and outputs by means of optional available serial interface RS232 or RS485
- low consumption
- accuracy class 0.2
- digital measuring process
- auxiliary voltage supply by means of universal AC/DC or AC supplies.


Application

The programmable measuring transducer type EMBSIN 241 FV is being used for converting the frequency of sinus-shaped AC alternating voltage signals into a load-independent output volume. The analogue output signals (current or voltage) are arranged proportionally to the frequency of the voltage input and can be used for regulating analogue or digital units. The input volumes and output volumes can be configured via the available interface RS232 or RS484 with "MBSET" parametric software.

Technical data EMBSIN 241 FV

measuring input		auxiliary power	
measuring range	40 ... 70 Hz	universal power supply	DC or AC 40...70 Hz universal
input voltage (U _i)	3 ... 500 V	voltage ranges	24 ... 300 V DC and 40 ... 276 V AC
consumption	< 0.5 VA	AC power supply	45 ... 65 Hz
overload capacity	1.2 · U _N , constant	nominal voltages:	57,74 V, 100 V, 230 V, 400 V, 500 V
(acc. to IEC 60688, 1992)	2.0 · U _N , 1 sec.	power input	≤ 3 VA
measuring output		accuracy	
load-independent DC current	0 ... 1 mA to 0 ... 5 mA or 0 ... 5 mA to 0 ... 20 mA	reference value	input end value
burden resistance	$R_{Bmax} = \frac{15[V]}{I_{ON} [mA]} \text{ k}\Omega$	accuracy class	class 0.2
current output		reference conditions	
burden voltage	≤ 15 V	ambient temperature	15 ... 30 °C
imprinted DC voltage	0 ... 1 V or 0 ... 10 V	input signal	0 ... 100 % I _N
burden resistance	$R_{Bmin} = \frac{U_{ON} [V]}{20[mA]} \text{ k}\Omega$	frequency	45 ... 65 Hz
voltage output		safety	
output signalling limit		protection class	II
current output	125 % I _{AN}		300 V, rms, connection category III
voltage output	125 % U _{AN}		500 V, rms, connection category II
residual ripple		contamination class	
of the output current	≤ 1 % p.p.		2
response time	≤ 300 ms	test voltage	3 kV, rms (acc. to IEC 61010-1:1990)
		electrocution protection	IP 40, housing (test wire, EN 60529) IP 20, connection terminals (test digit, EN 60529)
		interface	
			RS232, MODBUS RTU
		(optional)	RS485, MODBUS RTU
		connection terminals	
			≤ 4.0 mm ² single wire
			≤ 2 x 2.5 mm ² Litze
		weight	
			approx. 300 g

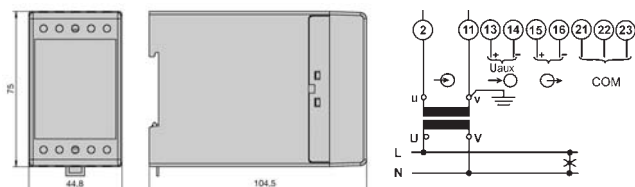Order information see page 277




	RS232	
	9-pole plug (SUB-D)	25-pole plug
Rx (21)	Tx (3)	Tx (2)
⊥ (22)	GND (5)	GND (7)
Tx (23)	Rx (2)	Rx (3)
	RS485	
	A (21)	DATA +
	C (22)	NC ¹⁾
B (23)		DATA -

1) -NC- do not connect!

EMBSIN 241 F

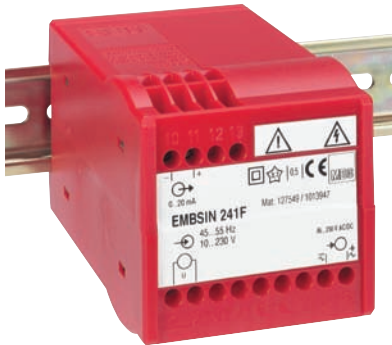Measuring transducers for frequency



- with auxiliary voltage supply
- housing for 35 mm DIN rail mounting

Features/benefits

- measuring input: sinus-shaped, rectangular shaped or distorted input voltage (10 to 690 V, 10 Hz to ...1.5 kHz) with dominant basic wave
- measuring output: Unipolar, bipolar or live-zero output signal
- measuring principle: Digital constant period measuring
- AC/DC auxiliary power by means of universal power supply

Application

Measuring transducer for frequency

A load-independent DC signal or an imprinted DC voltage signal is available which stands proportional to the frequency of the input volume. The measuring transducer fulfills the requirements and regulations with regard to the electro-magnetic compatibility of (EMV) and safety (IEC 1010 or EN 61010).


Technical data EMBSIN 241 F

measuring input →		auxiliary power →	
rated frequency	selectable between $f_u = 10 \text{ Hz}$ and $f_o = 1500 \text{ Hz}$	universal power supply	DC or AC (40 ... 400 Hz) DC -15 % / + 33 % 1.5 W AC ±15 % 3 VA
min. range	$f_u / (f_o - f_u) < 50$	AC / DC	24 ... 60 V or 85 ... 230 V
rated input voltage U_N	10 ... 230 V or 230 ... 690 V	or AC-auxiliary power from	24 ... 60 V or 85 ... 230 V,
consumption	$< U_N \cdot 1.5 \text{ mA}$	voltage measuring input	(40 Hz ≤ f ≤ 400 Hz) ± 15 %
overload capacity	1.2 · U_N , constant 2.0 · U_N , 1 sec. (max. 264 V by auxiliary power from voltage measuring input)	accuracy	
wave shape	any, only basic wave will be considered	reference value	output range
		accuracy class	class 0.2
		safety	
		protection class	II, (protection isolated, DIN EN 61010)
		electrocution protection	IP 40, housing (test wire, EN 60529) IP 20, connection terminals (test digit, EN 60529)
		contamination class	2
		overvoltage category	III
		nominal isolation voltage (to earth)	230 or 400 V, input 230 V auxiliary power 40 V output
		weight	230 g
measuring output →			
load-independent DC current	0 ... 1 to 0 ... 20 mA or unipolar live-zero 1 ... 5 to 4 ... 20 mA		
bipolar	± 1 to ± 20 mA		
burden voltage	≤ +15 V, resp. -12 V		
imprinted DC voltage	0 ... 1 to 0 ... 10 V or		
unipolar	live-zero 0.2 ... 1 to 2 ... 10 V		
bipolar	± 1 to ± 10 V		
load capacity	max. 4 mA		
voltage limit			
by $R_{ext} = \infty$	≤ 25 V		
current limit	approx. 1.3 · I_{AN} by current output		
under overload	approx. 30 mA by voltage output		
residual ripple			
of the output current	< 0.5 % p.p.		
nominal value response time	4 periods of the measuring frequency		
other ranges	2, 8 or 16 periods of the measuring frequency		

Order information see page 278

EMBSIN 241 FD

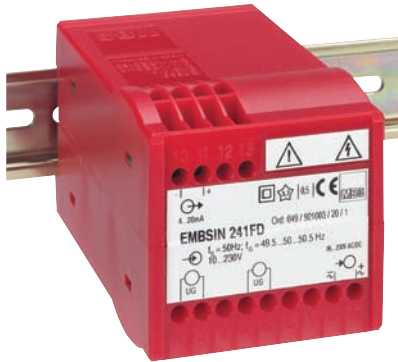Measuring transducers for frequency difference



• housing for 35 mm DIN rail mounting

Features/benefits

- measuring inputs: Sinus-shaped, rectangular or distorted input voltage (10 to 690 V, $\Delta f = \pm 1 \% f_s$ to $\pm 80 \% f_s$, f_s and $f_G \geq 10$ Hz to ≤ 1.5 kHz) with dominant basic wave
- measuring output: Unipolar, bipolar, or live-zero output signal
- measuring principle: Digital, constant period measuring
- AC/DC auxiliary power by means of universal power supply

Application

Measuring transducers for monitoring the frequency difference between two synchronized supplies. A load-independent DC signal or an imprinted DC voltage signal is available as an output signal, which stands proportionally to the measuring value. The measuring transducer fulfills the requirements and regulations with regard to the electromagnetic compatibility (EMV) and safety (IEC 1010 or EN 61010).


Technical data EMBSIN 241 FD

measuring input 			
measuring range	$\Delta f = \pm 1 \% f_s$ to $\pm 80 \% f_s$; f_s and $f_G \geq 10$ Hz to ≤ 1.5 kHz	nominal value of the response time	4 periods of the measuring frequency
input voltage U_N	generator or bus bar 10 ... 230 V or 230 ... 690 V Three-phase system! Input voltage = linked voltage (max. 230 V by auxiliary power from voltage measuring input)	other ranges	2, 8 or 16 periods of the measuring frequency
consumption	$< U_N \cdot 1.5$ mA per measuring input	auxiliary power 	
overload capacity	$1.2 \cdot U_N$, constant $2.0 \cdot U_N$, 1 sec. (max. 264 V by auxiliary power from voltage measuring input)	universal power supply	DC or AC (40 ... 400 Hz)
wave shape	any, only basic wave will be considered	AC/DC ranges	85 ... 230 V or 24 ... 60 V
Measuring output 		or auxiliary power from voltage measuring input	24 ... 60 V to 85 ... 230 V at $40 \text{ Hz} \leq f \leq 400 \text{ Hz}$
load-independent DC current unipolar	0 ... 1 to 0 ... 20 mA or live-zero 1 ... 5 to 4 ... 20 mA	power input	approx. 2 W or 4 VA
bipolar	$\pm (1 \dots 20)$ mA	accuracy	
burden voltage	≤ 15 V or ≥ -12 V	reference value	nominal value output
imprinted DC voltage unipolar	0 ... 1 to 0 ... 10 V or live-zero 0.2 ... 1 to 2 ... 10 V	accuracy class	class 0.2
bipolar	$\pm (1 \dots 10)$ V	safety	
load capacity	max. 4 mA	protection class	II, (protection isolated, DIN EN 61010)
voltage limit by $R_{ext} = \infty$	≤ 25 V	electrocution protection	IP 40, housing (test wire, EN 60529) IP 20, connection terminals (test digit, EN 60529)
current limit under overload	approx. $1.3 \cdot I_{AN}$ by current output approx. 30 mA at voltage output	contamination class	2
residual ripple of the output current	$< 0.5 \% \text{ p.p.}$	overvoltage category	III
		nominal isolation voltage (to earth)	230 V or 400 V, input 230 V, auxiliary power 40 V, output
		weight	270 g

Order information see page 278

EMBSIN 271 G

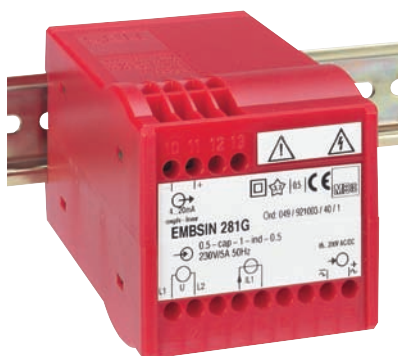Measuring transducers for phase angle



• housing for 35 mm DIN rail mounting

Features/benefits

- measuring input: Sinus-shaped, rectangular or distorted input volumes with dominant basic wave
- input signal: 1 A or 5 A, 10 V to 690 V
- measuring range: Phase angle $-180^\circ \leq \varphi \leq +180^\circ$ el
- measuring output: Unipolar, bipolar or live-zero output signal
- measuring principle: Monitoring of the zero currents
- AC/DC auxiliary power by means of universal power supply

Application

Measuring transducers for measuring of phase angle between current and voltage of a sinus-shaped single-phase supply or a symmetric load of a three-phase supply. A load-independent DC current signal or imprinted DC voltage signal is available, which is proportionally arranged to the phase angle between the measuring signal of current and voltage. The measuring transducer fulfills the requirements and regulations with regard to the electromagnetic compatibility (EMV) and safety (IEC 1010 or EN 61010).

Technical data EMBSIN 271 G

measuring input ➡		residual ripple of the output current	
measuring range	$-175^\circ \text{el} \dots 0 \dots +175^\circ \text{el}$		$< 0.5 \% \text{ p.p.}$
phase angle	min. measuring range $\geq 20^\circ \text{el}$	nominal value of the response time	4 periods of the measuring frequency
nominal frequency f_N	16 2/3 ... 400 Hz	other ranges	2, 8 or 16 periods of the measuring frequency
input voltage U_N	10 ... 690 V (max. 230 V by auxiliary power from voltage measuring input)	auxiliary power ➡	
rated input current I_N	1 A or 5 A	universal power supply	DC or AC (40 ... 400 Hz)
consumption	$< 0.1 \text{ VA}$ current path $U_N \cdot 1.5 \text{ mA}$ voltage path	AC/DC ranges	85 ... 230 V or 24 ... 60 V
overload capacity	$1.2 \cdot I_N$, constant $1.2 \cdot U_N$, constant $20 \cdot I_N$, 1 sec. $2.0 \cdot U_N$, 1 sec. (max. 264 V by auxiliary power from voltage measuring input)	or auxiliary power from voltage measuring input	85 ... 230 V or 24 ... 60 V
measuring output ➡		power input	$\leq 2 \text{ W}$ (4 VA)
load-independent DC current	0 ... 1 to 0 ... 20 mA or	accuracy	
unipolar	live-zero 1 ... 5 to 4 ... 20 mA	reference value	$\Delta \varphi = 90^\circ$
bipolar	$\pm (1 \dots 20) \text{ mA}$	accuracy class	class 0.5
burden voltage	$\leq +15 \text{ V}$ or $\geq -12 \text{ V}$	safety	
imprinted DC voltage	0 ... 1 to 0 ... 10 V or	protection class	II, (protection isolated, DIN EN 61010)
unipolar	live-zero 0.2 ... 1 to 2 ... 10 V	electrocution protection	IP 40, housing (test wire, EN 60529) IP 20, connection terminals (test digit, EN 60529)
bipolar	$\pm (1 \dots 10) \text{ V}$	contamination class	2
load capacity	max. 4 mA	overvoltage category	II
voltage limit by $R_{\text{ext}} = \infty$	$\leq 25 \text{ V}$	nominal isolation voltage (to earth)	230 or 400 V, input 230 V, auxiliary power 40 V, output
current limit under overload	approx. $1.3 \cdot I_{AN}$ by current output approx. 30 mA by voltage output	weight	240 g

Order information see page 279



EMBSIN 271 GD

Measuring transducers for phase angle difference

• housing for 35 mm DIN rail mounting

Features/benefits

- measuring input: Sinus-shaped, rectangular or distorted rated input voltages 10 to 690 V, $\pm 10^\circ \text{ el} \leq \varphi \leq \pm 180^\circ \text{ el}$ with dominant basic wave
- measuring output: Unipolar, bipolar or live-zero output signal
- measuring principle: Monitoring of the zero currents
- AC/DC auxiliary power by means of universal power supply

Application

Measuring transducers for monitoring of the phase angle difference between two synchronized supplies. A load-independent DC current signal or imprinted DC voltage signal is available which is proportionally arranged to the measuring value. The measuring transducer fulfills the requirements and regulations with regard to the electromagnetic compatibility (EMV) and safety (IEC 1010 or EN 61010).


Technical data EMBSIN 271 GD

measuring input 		auxiliary power 	
measuring range	- 120° ... 0 ... 120° el	universal power supply	DC or AC (40 ... 400 Hz)
rated frequency f_N	50 or 60 Hz		DC (- 15 ... + 33 %)
input voltages U_N	generator and bus bar 10 ... 230 V or 230 ... 690 V Three-phase system! U_N = linked voltage (max. 230 V by auxiliary power from voltage measuring input)	AC/DC ranges	AC (± 15 %; 40 ... 400 Hz)
consumption	< $U_N \cdot 1.5 \text{ mA}$ per measuring input	power input	85 ... 230 V or 24 ... 60 V
overload capacity	1.2 · U_N , constant 2.0 · U_N , 1 sec. (max. 264 V by auxiliary power from voltage measuring input)	accuracy	$\leq 2 \text{ W}$ (4 VA)
measuring output 		reference value	$\Delta\varphi = 90^\circ$
load-independent DC current	0 ... 1 to 0 ... 20 mA or	accuracy class	class 0.5
unipolar	live-zero 1 ... 5 to 4 ... 20 mA	safety	
bipolar	$\pm (1 ... 20) \text{ mA}$	protection class	II, (protection isolated, DIN EN 61010)
burden voltage	$\leq +15 \text{ V}$, resp. $\geq -12 \text{ V}$	electrocution protection	IP 40, housing (test wire, EN 60529) IP 20, connection terminals (test digit, EN 60529)
imprinted DC voltage	0 ... 1 to 0 ... 10 V or	contamination class	2
unipolar	live-zero 0.2 ... 1 to 2 ... 10 V	overvoltage category	III
bipolar	$\pm (1 ... 10) \text{ V}$	nominal isolation voltage	230 V or 400 V, input (to earth) 230 V, auxiliary power 40 V, output
load capacity	max. 4 mA	weight	270 g
voltage limit by $R_{\text{ext}} = \infty$	25 V		
current limit	approx. $1.3 \cdot I_{AN}$ by current output		
under overload	approx. 30 mA by voltage output		
residual ripple			
of the output current	< 0.5 % p.p.		
nominal value of the	4 periods of the		
response time	measuring frequency		
other ranges	2, 8 or 16 periods of the measuring frequency		

Order information see page 281

EMBSIN 281 G

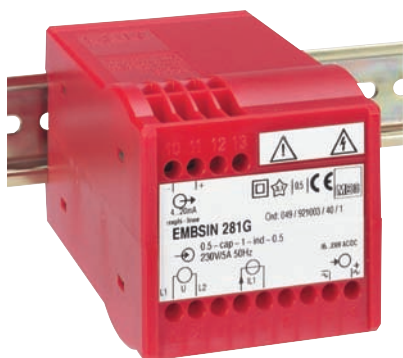Measuring transducers for power factor



• housing for 35 mm DIN rail mounting

Features/benefits

- measuring input: Sinus-shaped, rectangular or distorted rated input signal with dominant basic wave
- input signals: 1 A or 5 A, 10 V to 690 V
- power factor $\cos 0.5 \text{ cap.} - 1 - 0.5 \text{ ind.}$
- measuring output: Unipolar, bipolar or live-zero output signal
- measuring principle: Monitoring the distance of zero currents
- AC/DC auxiliary power by means of universal power supply

Application

Measuring transducers for the measuring of the power factor between current and voltage of a sinus-shaped single-phase supply or a symmetric load of a three-phase supply. A load-independent DC current signal or imprinted DC voltage signal is available which is proportionally arranged to the power factor between the measuring volumes of current and volt. The measuring transducer fulfills the requirements and regulations with regard to the electromagnetic compatibility (EMV) and safety (IEC 1010 or EN 61010).

Technical data EMBSIN 281 G

measuring input 		auxiliary power 	
power factor $\cos\varphi$	0.5-cap-1-ind-0.5	universal power supply	DC or AC (40 ... 400 Hz)
rated frequency f_N	16 2/3 ... 400 Hz	AC/DC ranges	85 ... 230 V or 24 ... 60 V
input voltage U_N	10 ... 690 V (max. 230 V by auxiliary power from voltage measuring input)	or auxiliary power from voltage input	85 ... 230 V or 24 ... 60 V
rated input current I_N	1 A or 5 A	power input	$\leq 2 \text{ W}$ (4 VA)
consumption	$< 0.1 \text{ VA}$ current path $U_N \cdot 1.5 \text{ mA}$ voltage path	accuracy	
overload capacity	$1.2 \cdot I_N$, constant $1.2 \cdot U_N$, constant $20 \cdot I_N$, 1 sec. $2.0 \cdot U_N$, 1 sec. (max. 264 V by auxiliary power from voltage measuring input)	reference value	$\Delta \cos\varphi = 0.5$
measuring output 		accuracy class	class 0.5
load-independent DC current unipolar	0 ... 1 to 0 ... 20 mA or live-zero 1 ... 5 to 4 ... 20 mA	safety	
bipolar	$\pm (1 \dots 20) \text{ mA}$	protection class	II, (protection isolated, DIN EN 61010)
burden voltage	$\leq +15 \text{ V}$ resp. $\geq -12 \text{ V}$	electrocution protection	IP 40, housing (test wire, EN 60529) IP 20, connection terminals (test digit, EN 60529)
imprinted DC voltage unipolar	0 ... 1 to 0 ... 10 V or live-zero 0.2 ... 1 to 2 ... 10 V	contamination class	2
bipolar	$\pm (1 \dots 10) \text{ V}$	overvoltage category	III
load capacity	max. 4 mA	nominal isolation voltage (to earth)	230 V or 400 V, input 230 V, auxiliary power 40 V, output
voltage limit by $R_{\text{ext}} = \infty$	$\leq 25 \text{ V}$	weight	260 g
current limit under overload	approx. $1.3 \cdot I_{AN}$ by current output approx. 30 mA by voltage output		
residual ripple of the output current	$< 0.5 \% \text{ p.p.}$		
nominal value of the response time	4 periods of the measuring frequency		
other ranges	2, 8 or 16 periods of the measuring frequency		

Order information see page 279

EMBSIN 351 P

Measuring transducers for active power



• housing for 35 mm DIN rail mounting

Features/benefits

- measuring input: Sinus-shaped nominal input currents (1 A or 5 A) and nominal input voltages (100 V to 690 V)
- measuring output: Unipolar, bipolar or live-zero output signal
- measuring principle: Impulse width modulation (TDM-process), TDM = time division multiplication
- AC/DC auxiliary power by means of universal power supply

Application

Measuring transducer for the transformation of the active power of a single-phase alternative AC current or three-phase current supply of equal or unequal phase load.

A load-independent DC current signal or imprinted DC voltage signal is available, which is proportionally arranged to the measuring value of the active power.

The measuring transducers fulfill the requirements and regulations, with regard to the electromagnetic compatibility (EMV) and safety (IEC 1010 or EN 61010).

Technical data EMBSIN 351 P

measuring input 		auxiliary power 	
rated frequency f_N	50 Hz or 60 Hz	universal power supply	DC or AC (40 ... 400 Hz)
rated input voltage U_N	3-phase system U_N = linked voltage 10 ... 690 V (max. 230 V by auxiliary power from voltage measuring input)	AC/DC	85 ... 230 V or 24 ... 60 V
rated input current I_N	1 A or 5 A	or auxiliary power from voltage measuring input	≥ 85 V to ≤ 230 V AC
calibration factor c	0.75 to 1.3 by active power	power input	≤ 2.5 W (4.5 VA)
permissible measuring range	by active power ≥ 0.75 to $1.3 \cdot \sqrt{3} \cdot U_N \cdot I_N$	accuracy	
consumption	< 0.1 VA per current path $U_N \cdot 1$ mA per voltage path	reference value	output end value
overload capacity	$1.2 \cdot I_N$, constant; 20 I_N , 1 sec. $1.2 \cdot U_N$, constant; 2.0 U_N , 1 sec. (max. 264 V by auxiliary power from voltage measuring input)	accuracy class	class 0.5
measuring output 		safety	
load-independent DC current unipolar	0 ... 2.5 to 0 ... 20 mA or live-zero 1 ... 5 to 4 ... 20 mA	protection class	II, (protection isolated, DIN EN 61010)
bipolar	$\pm (2.5 \dots 20)$ mA	electrocution protection	IP 40, housing (test wire, EN 60529) IP 20, connection terminals (test digit, EN 60529)
burden voltage	± 15 V	contamination class	2
imprinted DC voltage unipolar	0 ... 10 V or live-zero 2 ... 10 V	overvoltage category	III
bipolar	± 10 V	nominal isolation voltage (to earth)	400 V, input 230 V, auxiliary power 40 V, output
load capacity	max. 4 mA	weight	700 g
voltage limit by $R_{ext} = \infty$	≤ 40 V		
current limit under overload	approx. $1.3 \cdot I_{AN}$ by current output approx. 30 mA by voltage output		
residual ripple of the output current	< 2 % p.p.		
response time	< 300 ms		

Order information see page 282

EMBSIN 361 Q

Measuring transducers for re-active power



• housing for 35 mm DIN rail mounting

Features/benefits

- measuring input: Sinus-shaped nominal input currents (1 A or 5 A) and nominal input voltages (100 V to 690 V)
- measuring output: Unipolar, bipolar or live-zero output signal
- measuring principle: Impulse width modulation (TDM-process), TDM = time division multiplication
- AC/DC auxiliary power by means of universal power supply

Application

Measuring transducer for the transformation of the re-active power of a single-phase alternative AC current or three-phase current supply of equal or unequal phase load.

A load-independent DC current signal or imprinted DC voltage signal is available, which is proportionally arranged to the measuring value of the re-active power.

The measuring transducers fulfill the requirements and regulations, with regard to the electromagnetic compatibility (EMV) and safety (IEC 1010 or EN 61010).

Technical data EMBSIN 361 Q

measuring input 		auxiliary power 	
rated frequency f_N	50 Hz	universal power supply	DC or AC (40 ... 400 Hz)
rated input voltage U_N	Three-phase system U_N = linked voltage 10 ... 690 V (max. 230 V by auxiliary power from voltage measuring input)	AC/DC	85 ... 230 V or 24 ... 60 V
rated input current I_N	1 A or 5 A	or auxiliary power from voltage measuring input	≥ 85 V to ≤ 230 V AC
calibration factor c	0.5 to 1.0 by re-active power	power input	≤ 2.5 W (4.5 VA)
permissible measuring range end values	by re-active power ≥ 0.5 to $1.0 \cdot \sqrt{3} \cdot U_N \cdot I_N$	accuracy	
consumption	< 0.1 VA per current path $U_N \cdot 1$ mA per voltage path	reference value	output end value
overload capacity	$1.2 \cdot I_N$, constant; 20 I_N , 1 sec. $1.2 \cdot U_N$, constant; 2.0 U_N , 1 sec. (max. 264 V by auxiliary power from voltage measuring input)	accuracy class	class 0.5
measuring output 		safety	
load-independent DC current	0 ... 2.5 to 0 ... 20 mA or	protection class	II, (protection isolated, DIN EN 61010)
unipolar	live-zero 1 ... 5 to 4 ... 20 mA	electrocution protection	IP 40, housing (test wire, EN 60529) IP 20, connection terminals (test digit, EN 60529)
bipolar	$\pm (2.5 \dots 20)$ mA	contamination class	2
burden voltage	± 15 V	overvoltage category	III
imprinted DC voltage	0 ... 10 V bzw.	nominal isolation voltage	400 V, input
unipolar	live-zero 2 ... 10 V	(to earth)	230 V, auxiliary power
bipolar	± 10 V		40 V, output
load capacity	max. 4 mA	weight	700 g
voltage limit by $R_{ext} = \infty$	≤ 40 V		
current limit under overload	approx. $1.3 \cdot I_N$ by current output approx. 30 mA by voltage output		
residual ripple of the output current	< 2 % p.p.		
response time	< 300 ms		

Order information see page 282

EMBSIN 301

Programmable measuring transducers for alternating current



Features/benefits

- auxiliary power supply 230 V AC or 24 V DC.
- two remote controllable measuring ranges from 20...600 A AC
- two simultaneously available analogue measuring outputs
- programmable output characteristic curves
- current circuit control by means of programmable control circuits
- information of the actual operation conditions through two open collector transistors in connection with simultaneous signalling of colored light emittance diodes

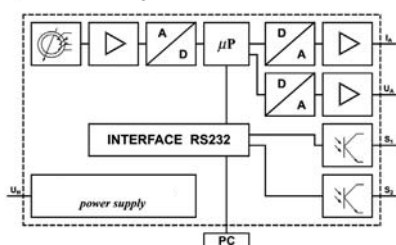
Application

Programmable measuring transducer for monitoring sinus-shaped as well as distorted AC currents in the rated current range of 20 ... 600 A. Inductive, galvanically separated measuring value collection is secured by means of an integrated current transformer.

As an output signal, proportionally arranged to the measurement value (rms) a DC current signal and an imprinted DC voltage signal is available. By means of an integrated **interface RS232** the following additional power features can be realized:

- adjustment of the output characteristics of the analogue outputs 0(4) ...20 mA or 0(2) ...10 V
- nominal current control by means of two programmable control circuits
- optimal signaling of the actual value of the measuring volumes in realiance to the tuned control circuits by means of three-coloured light emittance diodes
- energizing of the switch operations (i.e. $I_{\min}/I_{\max}$ -monitoring) by means of two open collector transistors, designated to the tuned switch circuits
- measuring value continuous monitoring of measuring values and data saving, when interacting with external computers.

Basic circuit diagram



Dimensions:

Depth x length x height:
(87.5 x 70 x 114 mm)

Technical data EMBSIN 301

measuring input

measuring variable sinus-shaped or distorted
alternating current

measuring range 20 ... 600 A AC

rated frequency f_N 50 Hz

consumption < 0.5 VA

overload capacity $1.5 \cdot I_N$, constant
 $8.0 \cdot I_N$, 40 sec.

measuring output

current output

load-independent DC current 0...20 mA or live-zero 4...20 mA,
programmable by means of software

max. burden voltage ≤ 15 V DC

max. burden resistance $R_B \leq 500 \Omega$

residual ripple of
the output current < 0.5 % p.p.

current limit
under overload ≤ 30 mA

voltage output

imprinted DC voltage 0...10 V or live-zero 2...10 V,
unipolar programmable by means of software

min. burden resistance ≤ 10 k Ω

voltage limit by $R_{ext} = \infty$ ≤ 15 V

response time of
the output signal 50 ms

accuracy

reference value nominal output value

accuracy class class 0.5
(0.5 % from output end value)

working range 1 ... 120 % I_N

warming-up time ≤ 5 min

auxiliary power

AC 230 V ± 10 %

DC (optional) 24 V ± 15 %

operating conditions

field of operation indoors without humidity

working temperature $-5^\circ\text{C} \leq \vartheta \leq +45^\circ\text{C}$

storage temperature $-40^\circ\text{C} \leq \vartheta \leq +70^\circ\text{C}$

energizing

2 open-collector transistor outputs for load current dependent
monitoring of relay controls;
programmable control circuits
via units software

U_{CEmax} 50 V

I_{CEmax} 35 mA

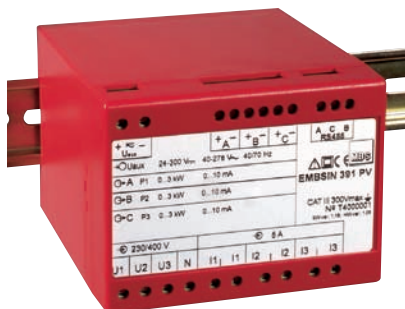
interface

series RS 232, connection via 9-pole
SUB-D-plug

standard IEC 60688
IEC 61000

EMBSIN 391 PV

Programmable measuring transducers
for all electrical parameters



- with auxiliary voltage supply housing for 35 mm DIN rail mounting

Features/benefits

- multifunctional measuring transducer for the simultaneous distribution of 3 parameters of the electrical system
- monitoring of up to 50 different parameters (V, A, kW, kVA, ...)
- programmable measuring inputs and measuring outputs
- low power consumption
- auxiliary power supply by means of universal AC/DC or AC power
- accuracy class 0.5
- serial interface, RS 232 or RS 485 (optional)
- max. 3 analogue outputs

Application

The programmable measuring transducer EMBSIN 391 PV allows for the simultaneous distribution of 3 parameters of the electrical network. Large input ranges of the parameters allow for the monitoring of almost all standardized AC voltages and AC currents. At the measuring output of the transducer are three galvanically separated, load-independent, analogue output signals available, which are proportionally arranged to the input parameters. These output signals (DC voltage or DC current) can be used for monitoring/controlling of analogue or digital units.

Technical data EMBSIN 391 PV

measuring input ➡		auxiliary power ➡	
rated input voltage	50 V to 500 V AC (phase against neutral)	universal power supply	DC or AC 40...70 Hz universal
rated input current	0.5 A to 5.0 A AC	voltage ranges	24 ... 300 V DC and 40 ... 276 V AC
overload capacity		AC power supply	45 ... 65 Hz
current input	2 · I _N , constant 20 · I _N , 1 sec.	nominal voltages:	57.74 V, 100 V, 230 V, 400 V, 500 V
voltage input	1.5 · U _N , constant 2.0 · U _N , 1 sec.	power input	≤ 3 VA
measuring output (analogue) ➡		accuracy	
nominal current output range (I _{AN}), parametrical	0 ... 1 mA to 0 ... 20 mA	reference value	end value of the input volume
max. burden voltage	U _B ≤ 15 V	accuracy class	class 0.5
burden resistance current	R _{MAX} [kΩ] = 15V / I _{AN} [mA]	reference conditions	
nominal voltage output ranges (U _{AN}), parametrical	0 ... 1 V to 0 ... 10 V	ambient temperature	15 ... 30 °C
max. burden current	20 mA	input signal	0 ... 100 % I _N
burden resistance		frequency	45 ... 65 Hz
voltage	R _{MIN} [kΩ] = U _{AN} / 20 mA	safety	
residual ripple of the output current	≤ 1 % p.p.	protection class	IP50 300 V, rms, connection category III 500 V, rms, connection category II
response time	≤ 300 ms	contamination class	2
		test voltage	3 kV, rms (acc. to IEC 61010-1: 1990)
		electrocution protection	IP 40, housing (test wire, EN 60529) IP 20, connection terminals (test digit, EN 60529)
		working temperature	-10 °C ≤ θ ≤ + 55 °C
		interface	
		(optional)	RS232, MODBUS RTU RS485, MODBUS RTU
		connection terminals	
		≤ 4.0 mm ² single wire ≤ 2 x 2.5 mm ² Litze	
		weight	
		with AC power supply	approx. 600 g
		with universal power supply	approx. 500 g


Order information see page 283

EMBSIN 391 PV


Programmable measuring transducers
for all electrical parameters

Connection diagram


The voltage inputs of the measuring transducer can be connected directly to a low voltage network or to a high voltage network via a high voltage transformer. The current inputs of the measuring transducer can be directly connected to a low voltage network via a low voltage current transformer or to a high voltage network via a high voltage current transformer.




single-phase
system – 1b

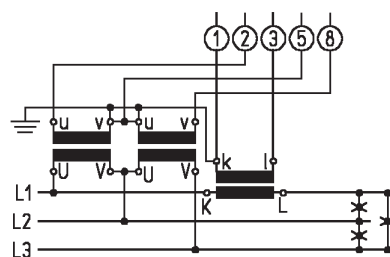

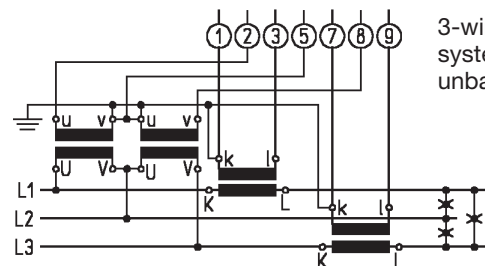
3-wire three-phase
system - 3b,
balanced load



3-wire three-phase
system - 3u,
unbalanced load



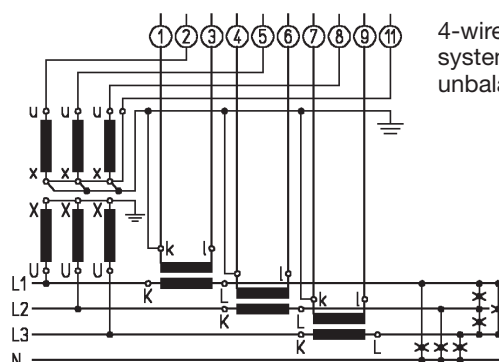4-wire three-phase
system - 4b,
balanced load



4-wire three-phase
system - 4u,
unbalanced load

Function			Connection
measuring input	AC current	I _{L1}	1/3
		I _{L2}	4/6
		I _{L3}	7/9
	AC voltage	U _{L1}	2
		U _{L2}	5
		U _{L3}	8
N		11	
measuring outputs	output 1	+	15
		-	16
	output 2	+	17
		-	18
	output 3	+	19
		-	20
auxiliary voltage supply		DC +/ AC	13
		-/ AC	14
interface (optional)	RS232/RS485	Rx / A	21
		≡ / NC ¹⁾	22
		Tx / B	23

1) -NC- do not connect!

EMBSIN 391 PV

Programmable measuring transducers
for all electrical parameters

Specifications		
Description		EMBSIN 391 PV
auxiliary voltage		with auxiliary voltage supply
measuring principle		microprocessor sampling
inputs		
rated input voltage		programmable, 0...50 V to 0...500 V
rated input current		programmable, 0...0.5 to 0...5 A
rated frequency		45...65 Hz
outputs		
number of available analogue outputs		3 with AC/DC power supply 1 with AC power supply
output voltage ranges		programmable, -10...+10 V to -1...+1 V
output current ranges		programmable, -20...+20 mA to -1...+1 mA
interface		RS232 or RS485
measuring variables		
current	phase current I ₁ , I ₂ , I ₃ and mean value current I _{avg}	
	phase to neutral voltage U ₁ , U ₂ , U ₃ and mean value to neutral value voltage	a, b
voltage	linked voltages U ₁ -U ₂ , U ₂ -U ₃ , U ₃ -U ₁ and mean value of the linked voltages U _{avg} (pp)	a, b
frequency		a, b
active power		a, b
re-active power		a, b
apparent power		a, b
power factor		a, b
phase angle		a, b
% THD distortion factor		a, b
instantaneous value monitoring	phase current	a, b
	total apparent power	a, b
	total active power	a, b
	total re-active power	a, b
maximal value monitoring	phase current	a, b
	total apparent power	a, b
	total active power	a, b
	total re-active power	a, b

a - measuring value is available via analogue output

b - measuring value is visual via interface



EMBSIN 391

Programmable measuring transducers for all electrical parameters

• housing for 35 mm DIN rail

Features/benefits

- measuring inputs: Sinus-shaped input currents 0...7.5 A, sinus-shaped input voltages 0...690 V
- measuring outputs: 3 simultaneously available unipolar, bipolar or live-zero measuring outputs (current or voltage). The outputs can be assigned to several measuring parameters
- AC/DC auxiliary power supply, universal power supply
- programmable interface: Serial RS232 C

Application

The EMBSIN 391 is a programmable, multi measuring transducer for electrical power current variables. It monitors simultaneously 3 measuring variables of a single-phase AC current or three-phase AC current network of equal or unequal load. As an output signal 3 galvanically separated load independent DC current signals or imprinted DC voltage signals are available, which are proportionally arranged to the chosen measuring values of the input parameters. The measuring transducer fulfills all requirements and regulations with regard to the electro-magnetic compatibility (EMV) and safety (IEC 1010 and EN 61010).

Technical data EMBSIN 391

measuring input ➡		auxiliary voltage supply, alternatively ➡	
rated frequency f_N	50/60 Hz	AC / DC power supply	24 ... 60 V AC / DC
sinus-shaped input current I_N	0 ... 7.5 A		85 ... 230 V AC / DC
sinus-shaped input voltage U_N	U_N = linked voltage 0 ... 690V max. 400 V to earth !		(DC ... 50/60 Hz) (DC -15 % ... + 33 %) (AC -15 % ... + 15 %)
power input from measuring circuit		power input	≤ 5 W (7 VA)
- current path	≤ $I_E^2 \cdot 0.01$ W	accuracy	
- voltage path	≤ $U_E^2 / 400$ kW	reference value	measuring range end value
interface	serial, RS232 C	accuracy class	class 0.5
measuring output, user defined ➡		safety	
3 x load independent DC current	-20 ... +20 mA	protection class	II, (protection isolated, EN 61010-1)
or		electrocution protection	IP 40, housing (test wire, EN 60529) IP 20, connection terminals (test digit, EN 60529)
3 x imprinted DC current	-10 ... +10 V	contamination class	2
max. burden at current output	$R_B \leq \frac{15 \text{ V}}{I_{AN}} [\text{k}\Omega]$	nominal isolation voltage	inputs: 300 V(2) 600 V(3) auxiliary power: 230 V outputs: 40 V
min. burden by voltage output	$R_B \leq \frac{U_{AN}}{1 \text{ mA}} [\text{k}\Omega]$	weight	370 g
output signalling limit under overload :		(2) overvoltage category III	
- current output	$1.2 \times I_{AN} (R_A = 0)$ ≤ 30 V (by $R_A = \infty$)	(3) overvoltage category II	
- voltage output	40 mA ($R_A = 0$) $1.2 \times U_{AN} (R_A = \infty)$		
residual ripple of the output current	≤ 1 % p.p		
response time of the output signal	1...2 x measuring cyclus time		

Order information see page 286

Order Lists

	page
FASK	Flexible clip-on current transformer (Rogowski coil)270
EMBSIN 100 IV	Measuring transducer for AC current, without auxiliary voltage supply271
EMBSIN 100 I	Measuring transducer for AC current, without auxiliary voltage supply271
EMBSIN 101 I	Measuring transducer for AC current, with auxiliary voltage supply272
EMBSIN 201 IEV	Measuring transducer for AC current, rms measurement273
EMBSIN 201 IE	Measuring transducer for AC current, rms measurement275
EMBSIN 120 UV	Measuring transducer for AC voltage, without auxiliary voltage supply276
EMBSIN 120 U	Measuring transducer for AC voltage, without auxiliary voltage supply276
EMBSIN 121 U	Measuring transducer for AC voltage, with auxiliary voltage supply272
EMBSIN 221 UEV	Measuring transducer for AC voltage, with auxiliary voltage supply273
EMBSIN 221 UE	Measuring transducer for AC voltage, rms measurement275
EMBSIN 241 FV	Measuring transducer for frequency, with auxiliary voltage supply277
EMBSIN 241 F	Measuring transducer for frequency, with universal AC/DC power supply278
EMBSIN 241 FD	Measuring transducer for frequency difference with universal AC/DC power supply278
EMBSIN 271 G	Measuring transducer for phase angle, with universal AC/DC power supply279
EMBSIN 271 GD	Measuring transducer for phase angle difference, with universal AC/DC power supply281
EMBSIN 281 G	Measuring transducer for power factor, with universal AC/DC power supply279
EMBSIN 351 P	Measuring transducer for active power, with universal AC/DC power supply282
EMBSIN 361 Q	Measuring transducer for re-active power, with universal AC/DC power supply282
EMBSIN 301	Programmable measuring transducer for AC current283
EMBSIN 391 PV	Programmable measuring transducer for all electrical variables283

Order Lists

FASK – Current transformers with separable, flexible measuring system (Rogowski coils)

Features			Order no.											
			X	X	X	X	X	X	X	X	X	X	X	X
1.) Type / length l	Type	coil length												
	F30	30 cm	F	0	3	0								
	F40	40 cm	F	0	4	0								
	F60	60 cm	F	0	6	0								
	F75	75 cm	F	0	7	5								
	F100	100 cm	F	1	0	0								
	special types on request		F	9	0	0								
2.) Measuring current	measuring range	coil length												
	200 A AC	l = 30 cm					0	2	0	0				
	500 A AC	l = 30 cm					0	5	0	0				
	1000 A AC	l = 40 cm					1	0	0	0				
	2000 A AC	l = 60 cm					2	0	0	0				
	3000 A AC	l = 75 cm					3	0	0	0				
	3000 A AC	l = 100 cm					3	0	0	0				
	special value on request 100...3000 A						X	X	X	X				
3.) Output signal U _A / auxiliary voltage supply U _H	U _A [V AC]		U _H [V DC]											
	0.500 V AC		5 V DC									0		
	1.000 V AC		5 V DC									1		
	2.000 V AC		9 V DC									2		
	3.000 V AC		12 V DC									3		
	4...20 mA DC											4		
	0...1 V DC											5		
	0...5 V DC											6		
	0.21 mV/A		without power supply									7		
4.) Lead / cord length	standard l											3 x 2.0 m		1
	special length l											max. 3 x 15.0 m		9

Order Lists

EMBSIN 100 IV – Measuring transducer for AC current, without auxiliary voltage supply

Features	Order no.				
EMBSIN 100 IV, measuring transducer for AC current order no.: 100 I - Vxxx	100 I -	V	X	X	X
1. construction housing MBS, for 35 mm DIN rail		V			
2. measuring range 0 ... 1 A			1		
0 ... 5 A			2		
nonstandard [A], 0 ... 1 A to 0 ... 7.5 A _____ A			9		
3. output signal 0 ... 5 mA				1	
0 ... 10 mA				2	
0 ... 20 mA				3	
4. additional text on the label without additional text					0
with additional text					1

rated frequency of the measuring signal: 50/60 Hz

EMBSIN 100 I – Measuring transducer for AC current, without auxiliary voltage supply

Features	Order no.				
EMBSIN 100 I, measuring transducer for AC current order no.: 100 I - Mxxxx	100 I -	M	X	X	X
1. construction housing MBS, for 35 mm DIN rail		M			
2. measuring range 0 ... 1 / 5 A			1		
0 ... 1.2 / 6 A			2		
9) nonstandard [A] 0 ... 0.5 A to 0 ... 7.5 A (only one measuring range!) _____ A			9		
3. output signal 0 ... 5 mA, Ra ≤ 3 kOhm				1	
0 ... 10 mA, Ra ≤ 1.5 kOhm				2	
0 ... 20 mA, Ra ≤ 750 Ohm				3	
4. measuring range adjustable measuring range fixed					0
measuring end value adjustable approx. ± 10 %					1
5. test certificates without test certificate					0
with test certificate in German					D
with test certificate in English					E

rated frequency of the measuring signal: 50/60 Hz

Order Lists

EMBSIN 101 I – Measuring transducer for alternating current EMBSIN 121 U – Measuring transducer for alternating voltage

Features	Order no.							
EMBSIN 101 I , measuring transducer for AC current order no.: 101 I - Mxx xxx	101 I -	M	X	X		X	X	X
EMBSIN 121 U, measuring transducer for AC voltage order no.: 121 U - Mx xxxx	121 U-	M	X		X	X	X	X
1. construction housing MBS / SP1, for 35 mm DIN rail		M						
2. frequency of the input voltage / input current rated frequency 50 / 60 Hz			1					
3. measuring range								
0 ... 1 A				A				
0 ... 5 A				B				
Z: _____ A				Z				
! Z: Nonstandard [A] : 0 ... 0.8 to 0 ... 1.2 or 0 ... 4 to 0 ... 6								
0 ... 100 V				A				
0 ... 250 V				B				
Z: _____ V				Z				
! Z: Nonstandard [V] : 0 ... 50 to 0 ... 500								
max. 300 V rated voltage to earth (rated voltages acc. to EN 61010)								
4. output signal								
0 ... 20 mA						1		
4 ... 20 mA						2		
4 ... 20 mA , 2-wire connection / feed						3		
9: _____ mA						9		
! 9: Nonstandard [mA] : 0 ... 2.5 to 0 ... < 20								
0 ... 10 V						A		
Z: _____ V						Z		
1 ... 5 to < (4... 20)								
! Z: Nonstandard [V] : 0 ... 5.0 to 0 ... < 10								
1 ... 5 to 2 ... 10								
5. auxiliary power								
auxiliary voltage Uh : 24 V AC						1		
auxiliary voltage Uh : 110 V AC						2		
auxiliary voltage Uh : 115 V AC						3		
auxiliary voltage Uh : 120 V AC						4		
auxiliary voltage Uh : 230 V AC						5		
auxiliary voltage Uh : 400 V AC, ! max. 300 V to earth!						6		
auxiliary voltage Uh : 24 V DC						A		
auxiliary voltage Uh : 24 V DC via output circuit						B		
universal power supply 85 ... 230 V AC/DC						C		
universal power supply 24 ... 60 V AC/DC						D		
Uh ... rated voltage, permissible tolerances								
AC : - 15 % ... +15 %								
DC : - 15 % ... +33 %								
for DC via output circuit: - 50 % ... +33 %								
! 1 to A not to be combined with output signal, order-no.: 3								
! B not to be combined with output signal, order no.: 1, 2, 9, A, Z								
6. test certificates								
without test certificate							0	
with test certificate in German							D	
with test certificate in English							E	

Order Lists

EMBSIN 201 IEV – Measuring transducer for alternating current, true rms measuring
EMBSIN 221 UEV – Measuring transducer for alternating voltage, true rms measuring

Features	Order no.											
EMBSIN 201 IEV, measuring transducer for AC current effective value, order no.: 201 IE - Vxxxxxxx	201 IE -	V	X		X	X	X	X	X	X	X	X
EMBSIN 221 UEV, measuring transducer for alternating voltage effective value, order no.: 221 UE - Vxxxxxxx	221 UE -	V		X	X	X	X	X	X	X	X	X
1. construction housing MBS, for 35 mm DIN rail		V										
2. measuring range												
0 ... 1 A			1									
0 ... 5 A			2									
9) _____ A												
! 9) 0 ... 0.2 A to 0 ... 6 A			9									
0 ... 50 V				A								
0 ... 500 V				B								
Z) _____ V												
! Z) 0 ... 50 V to 0 ... 500 V				Z								
3. output signal												
mA					1							
V					2							
4. output signal, start value												
output unipolar, start value 0					1							
output live-zero, start value 20 %					2							
5. output signal, end value												
output signal end value: 20 mA					1							
output signal end value: 1 ... 20 mA, _____ mA					9							
output signal end value: 10 V					A							
output signal end value: 1 ... 10 V, _____ V					Z							
6. auxiliary voltage												
universal power supply 24 ... 300 V DC/ 40 ... 276 V AC						1	0					
AC power supply						2						
57 V							1					
100 V							3					
110 V							4					
230 V							5					
400 V							7					
500 V							8					
7. type of serial interface												
without interface									0			
RS 232									1			
RS 485									2			
8. type of output characteristics												
linear											L	
curved (1)											B	

(1) Please take notice of the additional information in table 2 when ordering curved output characteristics.

Order Lists

EMBSIN 201 IEV – Measuring transducer for alternating current, true rms measuring EMBSIN 221 UEV – Measuring transducer for alternating voltage, true rms measuring

Table 2

Additional information when ordering measuring transducers with curved output characteristics

When ordering measuring transducers with curved output characteristics the start and end points as well as the position of the required curved break of the to be adjusted transmission ratio have to be defined.

Measuring transducers of the type **EMBSIN 201 IEV / EMBSIN 221 UEV** allow the presentation of transmission characteristics of up to 5 curved breaks.

Description		Code
start value of the measuring value(s)	dependent on the measuring range	s
	0 ... +20 mA / 0 V ... +10 V	
start value of the output value	dependent on the output range	p
	0 ≤ p ≤ +20 mA / 0 ≤ p ≤ +10 V	
end value of the measuring value (s)	dependent on the measuring range	e
end value of the output value (rt) if measuring value (e)	1 mA ... +20 mA / 1 V ... +10 V	
	dependent on the output range	rt
value of the measuring value (n _x)	dependent on the measuring range	n ₁ _____
		n ₂ _____
		n ₃ _____
		n ₄ _____
		n ₅ _____
value of the output value (o _x) if measuring value (n _x)	0 mA ... +20 mA / 0 V ... +10 V dependent on the output range 0 ≤ p ≤ +20 / 0 ≤ p ≤ +10	o ₁ _____
		o ₂ _____
		o ₃ _____
		o ₄ _____
		o ₅ _____

Order Lists

EMBSIN 201 IE – Measuring transducer for alternating current EMBSIN 221 UE – Measuring transducer for alternating voltage

Features	Order no.									
EMBSIN 201 IE, measuring transducer for alternating current effective value, order no.: 201 IE - Mxx xx x	201 IE -	M	X	X		X	X		X	X
EMBSIN 221 UE, measuring transducer for alternating voltage effective value, order no.: 221 UE - Mx xx xx	221 UE-	M	X		X	X		X	X	X
1. construction housing MBS, for 35 mm DIN rail		M								
2. frequency of the input current/ input voltage										
rated frequency 50/60 Hz			1							
rated frequency 400 Hz			2							
3. measuring range										
0 ... 1.0 / 5.0 A				1						
0 ... 1.2 / 6.0 A				2						
9: _____ / _____ A				9						
Lower/higher measuring range dependent on connection availability										
! 9: nonstandard [A]: 0 ... 0.1 / 0.5 to 0 ... < 1.2 / 6										
measuring range end value ratio 1 : 5										
0 ... 100 / $\sqrt{3}$ V					A					
0 ... 110 / $\sqrt{3}$ V					B					
0 ... 100 V					C					
0 ... 110 V					D					
0 ... 116.66 V					E					
0 ... 120 V					F					
0 ... 125 V					G					
0 ... 133.33 V					H					
0 ... 150 V					J					
0 ... 250 V					K					
0 ... 500 V !					L					
Z) _____ V					Z					
! Z: Nonstandard [V]: 0 ... 20 to 0 ... 690 *										
with auxiliary voltage from measuring input min. 24V/ max. 230V										
see selection criteria 5 digit 3+4										
! * > 400 V only linked voltage!										
4. output signal										
0 ... 20 mA					1					
4 ... 20 mA					2					
9: _____ mA					9					
0 ... 10 V					A					
Z: _____ V					Z					
! 9) Nonstandard [mA]: 0 ... 1.00 to 0 ... < 20										
0.2 ... 1 to < (4 ... 20)										
! Z) Nonstandard [V]: 0 ... 1.00 to 0 ... < 10										
0.2 ... 1 to 2 ... 10										
5. auxiliary voltage										
U _h : 85 ... 230 V AC/DC					1	1				
U _h : 24 ... 60 V AC/DC					2	2				
from measuring input (>= 24 ... 60 V AC)						3				
from measuring input (>= 85...230 V AC)						4				
U _h : 24 V AC/ 24 ... 60 V DC					5	5				
from low voltage area										
U _h = rated voltage										
tolerances: DC -15 ... +33 %, AC -15 ... +15 %										
! 3 not to be combined with measuring range order no.: C ... L										
! 4 not to be combined with measuring range order no.: A , B , L										
6. response time										
300 ms, standard								1		
50 ms								2		
7. test certificates										
without test certificate									0	
with test certificate in German									D	
with test certificate in English									E	

Order Lists

EMBSIN 120 UV - Measuring transducer for alternating voltage, without auxiliary voltage supply

Features	Order no.				
EMBSIN 120 UV, measuring transducer for alternating voltage order no.: 120 U - Vxxx	120 U -	V	X	X	X
1. construction housing MBS, for 35 mm DIN rail		V			
2. measuring range					
0 ... 100 / $\sqrt{3}$ V			1		
0 ... 110 / $\sqrt{3}$ V			2		
0 ... 100 V			3		
0 ... 110 V			4		
0 ... 250 V			6		
0 ... 500 V !			8		
9: _____ V					
! 9: Nonstandard [V] 0 ... 20 to 0 ... 500 V					
! max. 250 V rated voltage to earth, working voltage acc. to EN 61010!			9		
3. output signal					
0 ... 5 mA				1	
0 ... 10 mA				2	
0 ... 20 mA				3	
4. additional text on the label					
without additional text					0
with additional text					1

rated frequency of the measuring signal: 50 / 60 Hz

EMBSIN 120 U - Measuring transducer for alternating voltage, without auxiliary voltage supply

Features	Order no.					
EMBSIN 120 U, measuring transducer for alternating voltage order no.: 120 U - Mxxxx	120 U -	M	X	X	X	X
1. construction housing MBS, for 35 mm DIN rail		M				
2. measuring range						
0 ... 100 / $\sqrt{3}$ V			A			
0 ... 110 / $\sqrt{3}$ V			B			
0 ... 120 / $\sqrt{3}$ V			C			
0 ... 100 V			D			
0 ... 110 V			E			
0 ... 116.66 V			F			
0 ... 120 V			G			
0 ... 125 V			H			
0 ... 133.33 V			J			
0 ... 150 V			K			
0 ... 250 V			L			
0 ... 400 V			M			
0 ... 500 V			N			
Z: _____ V			Z			
! Z: Nonstandard [V] 0...20 to 0...500 V						
! max. 250 V rated voltage to earth, working voltage acc. to EN 61010!						
3. output signal						
0 ... 5 mA, $R_a \leq 3 \text{ k}\Omega$				1		
0 ... 10 mA, $R_a \leq 1.5 \text{ k}\Omega$				2		
0 ... 20 mA, $R_a \leq 750 \text{ }\Omega$				3		
4. measuring range adjustable						
measuring range fixed					0	
measuring end value adjustable approx. $\pm 10 \%$					1	
5. test certificates						
without test certificate						0
with test certificate in German						D
with test certificate in English						E

Order Lists

EMBSIN 241 FV - Measuring transducer for frequency

Features	Order no.										
EMBSIN 241 FV, measuring transducer for frequency order no.: 241 F - Vxxxxxxx	241 F-	V	X	X	X	X	X	X	X	X	X
1. construction											
housing MBS, for 35 mm DIN rail		V									
2. measuring range											
40 ... 70 Hz			1								
45 ... 55 Hz			2								
48 ... 52 Hz			3								
45 ... 65 Hz			4								
55 ... 65 Hz			5								
9: (40 Hz ≤ 70 Hz) $f_a \leq f_e \leq 70$ Hz f_a _____ Hz f_e _____ Hz			9								
3. output signal											
mA			1								
V			2								
4. output signal, start value											
output signal unipolar, start value				1							
output signal live-zero, start value 20 %				2							
5. output signal, end value											
output signal, end value: 5 mA				1							
output signal, end value: 10 mA				2							
output signal, end value: 20 mA				3							
output signal, end value: 1 ... 20 mA, _____ mA				9							
output signal, end value: 10 V				A							
output signal, end value: 1 ... 10 V, _____ V				Z							
6. auxiliary voltage											
universal power supply							1	0			
AC power supply							2				
57 V								1			
100 V								3			
110 V								4			
230 V								5			
400 V								7			
500 V								8			
7. type of serial interface											
without interface									1		
RS232									2		
RS485									3		
8. type of output characteristics											
linear										L	
curved (1)										B	

(1) Please take notice of the additional information in table 2 when ordering curved output characteristics.

Table 2

Additional information when ordering measuring transducers with curved output characteristics

When ordering measuring transducers with curved output characteristics the start and end points as well as the position of the required curved break of the to be adjusted transmission ratio have to be defined. Measuring transducers of the type **EMBSIN 241 FV** allow the presentation of transmission characteristics of up to 5 curved breaks.

Description		Code
start value of the measuring value (s)	dependent on the measuring range	s
start value of the output value (p)	0 mA ... +20 mA / 0 V ... +10 V	
	dependent on the output range	p
	0 mA ≤ p ≤ +20 mA / 0 ≤ p ≤ +10 V	
end value of the measuring value (e)	dependent on the measuring range	e
end value of the output value (rt) if measuring value (e)	1 mA ... +20 mA / 1 V ... +10 V	
	dependent on the output range	rt
value of the measuring value (n _x)	dependent on the measuring range	n ₁ ... n ₅
	0 mA ... +20 mA / 0 V ... +10 V	
value of the output value (o _x) if measuring value (n _x)	dependent on the output range	o ₁ ... o ₅
	0 ≤ p ≤ +20 / 0 ≤ p ≤ +10	

Order Lists

EMBSIN 241 F - Measuring transducer for frequency

EMBSIN 241 FD - Measuring transducer for frequency difference

Features	Order no.									
EMBSIN 241 F, measuring transducer for frequency order no.: 241 F - Mxxxxxx	241 F -	M	X	X		X	X	X	X	
EMBSIN 241 FD, measuring transducer for frequency difference order no.: 241 FD - Mxxxxxx	241 FD-	M	X		X	X	X	X	X	
1. construction housing MBS, for 35 mm DIN rail		M								
2. rated nominal voltage 241 FD -> generator and bus bar										
input voltage										
10 ... 230 V			1							
> 230 ... 690 V			2							
! Three-phase system: input voltage = linked voltage										
! 2 not permissible by auxiliary voltage starting from measuring input										
3. measuring range 45 ... 50 ... 55 Hz					1					
47 ... 49 ... 51 Hz					2					
47.5 ... 50 ... 52.5 Hz					3					
48 ... 50 ... 52 Hz					4					
58 ... 60 ... 62 Hz					5					
9: _____ Hz					9					
! 9: nonstandard [Hz]; limit values: start value fa > = 10 Hz, end value fe <= 1500 Hz fa / (fe - fa) < 50										
fs = 50 Hz / fg = 49.5 ... 50 ... 50.5 Hz					1					
fs = 50 Hz / fg = 47.5 ... 50 ... 52.5 Hz					2					
fs = 50 Hz / fg = 45 ... 50 ... 55 Hz					3					
fs = 50 Hz / fg = 40 ... 50 ... 60 Hz					4					
fs = 60 Hz / fg = 57.5 ... 60 ... 62.5 Hz					5					
9: _____ Hz					9					
! 9: Nonstandard [Hz]: upon request										
4. output signal 0 ... 20 mA					1					
4 ... 20 mA					2					
9: _____ mA					9					
0 ... 10 V					A					
Z: _____ V					Z					
! 9: Nonstandard [mA]: 0 ... 1.0 to 0 ... < 20 mA 1.0 ... 0 ... 1.0 to -20 ... 0 ... 20 mA 1 ... 5 to < (4 ... 20)										
! Z: Nonstandard [V] : 0 ... 1.0 to 0 ... < 10 V 0.2 ... 1 to 2 ... 10 V -1.0 ... 0 ... 1.0 to -10 ... 0 ... 10 V										
5. auxiliary voltage Uh: 85 ... 230 V AC/DC							1			
Uh: 24 ... 60 V AC/DC							2			
from measuring input (>= 24 ... 60 V AC)							3			
from measuring input (>= 85...230 V AC)							4			
auxiliary voltage Uh: 24 V AC / 24 ... 60 V DC from							5			
low voltage side Uh = rated voltage tolerances: DC -15 ... +33 %, AC -15 ... +15 % ! 3 + 4 not to be combined with input rated voltage, order no. 2										
6. response time 4 periods of input frequency								1		
2 periods of input frequency								2		
8 periods of input frequency								3		
16 periods of input frequency								4		
! 1: 4 periods = standard										
7. test certificates without test certificate									0	
with test certificate in German									D	
with test certificate in English									E	

Order Lists

EMBSIN 271 G - Measuring transducer for phase angle EMBSIN 281 G - Measuring transducer for power factor

Features	Order no.												
EMBSIN 271 G, measuring transducer for phase angle order no.: 271 G - Mxxxxxxx	271 G-	M	X	X	X	X	X	X	X	X	X	X	X
EMBSIN 281 G, measuring transducer for power factor order no.: 281 G - Mxxxxxxx	281 G-	M	X	X	X	X	X	X	X	X	X	X	X
1. construction housing MBS, for 35 mm DIN rail		M											
2. type of measuring for phase angle (proportional phi)			1										
for power factor (proportional cos phi)			2										
3. application single-phase AC current			1										
3- or 4-phase DC current, balanced U:													
L1-L2; I : L1			2										
L2-L3; I : L2			3										
L3-L1; I : L3			4										
L1-L3; I : L1			5										
L2-L1; I : L2			6										
L3-L2; I : L3			7										
L1-L2; I : L3			A										
L2-L3; I : L1			B										
L3-L1; I : L2			C										
4. input rated frequency rated frequency 50 Hz			1										
rated frequency 60 Hz			2										
9: _____ Hz			9										
! 9: Nonstandard [Hz]: $10 \leq f_N \leq 400$													
by auxiliary voltage from measuring input min. 40 Hz													
5. input rated voltage input voltage U_N : 100 V			1										
input voltage U_N : 230 V			2										
9: input voltage U_N : _____ V			9										
! 3-wire system: U_N = linked voltage													
! 9: Nonstandard [V]: ≥ 10 to 690 V													
by auxiliary voltage from measuring input													
min. 24 V / max. 230 V, see selection criteria 9, digit 3 and 4													
6. input rated current I_N : 1 A			1										
I_N : 5 A			2										
9: I_N : _____ A ($> 0.5 \dots 6$ A)			9										
! 9: Nonstandard [A] upon request													
7. measuring range -60 ... 0 ... 60° el			1										
cos phi : 0.5 ... cap ... 1 ... ind ... 0.5			2										
9: Nonstandard: _____			9										
! 1 not to be combined with measuring type order no. 2													
! 2 not to be combined with measuring type order no. 1													
! 9 Nonstandard, measuring range within													
1 ... ind ... 0 ... cap ... 1 ... ind ... 0 ... cap ... 1													
or -180 ... 0 ... 180° el													
clear output value, only to 175 ... 0 ... 175° el;													
measuring range $\geq 20^\circ$ el													

Order Lists

Continuation from page 278

EMBSIN 271 G - Measuring transducer for phase angle

EMBSIN 281 G - Measuring transducer for power factor

Features	Order no.			
8. output signal				
0 ... 20 mA		1		
4 ... 20 mA		2		
9: _____ mA		9		
0 ... 10 V		A		
Z: _____ V		Z		
! 9: Nonstandard [mA]: 0 ... 1.0 to 0 ... < 20				
-1.0 ... 0 ... 1.0 to -20 ... 0 ... 20				
1 ... 5 to < (4 ... 20)				
! Z: Nonstandard [V]: 0 ... 1.0 to 0 ... < 10				
0.2 ... 1 to 2 ... 10				
-1.0 ... 0 ... 1.0 to -10 ... 0 ... 10				
9. auxiliary voltage				
U _h : 85 ... 230 V AC/DC		1		
U _h : 24 ... 60 V AC/DC		2		
from measuring input (>= 24 ... 60 V AC)		3		
from measuring input (>= 85...230 V AC)		4		
U _h : 24 V AC / 24 ... 60 V DC from		5		
low voltage side				
U _h = rated voltage				
tolerances: DC -15 ... +33 %, AC -15 ... +15 %				
! 3 not to be combined with input rated voltage, order-no. 1 and 2				
10. response time				
4 periods of the input frequency		1		
2 periods of the input frequency		2		
8 periods of the input frequency		3		
16 periods of the input frequency		4		
! 4 periods = standard				
11. test certificates				
without test certificate				0
with test certificate in German				D
with test certificate in English				E

Order Lists

EMBSIN 271 GD – Measuring transducer for phase angle difference

Features	order no.								
EMBSIN 271 GD, measuring transducer for phase angle-difference order no.: 271 GD - Mxxxxxxx	271 GD -	M	X	X	X	X	X	X	X
1. construction housing MBS, for 35mm DIN rail		M							
2. input rated frequency									
50 Hz			1						
60 Hz			2						
9: _____ Hz			9						
! 9: Nonstandard [Hz]: ≥ 10 to 1500									
by auxiliary voltage from measuring input									
40 Hz $\leq f_n \leq 400$ Hz									
3. input rated voltage									
generator and bus bar									
Un : 100 V				1					
Un : 230V				2					
Un : _____ V				9					
3-phase system: Input voltage = linked voltage									
! 9: Nonstandard [V]: ≤ 10 to 690									
by auxiliary voltage from measuring input min. 24 V max 230 V									
! -> see selection criteria 6, digit 3 and 4									
4. measuring range									
-120° ... 0° ... +120° el					1				
9: measuring range : _____ ° e					9				
! 9: Nonstandard [°el], measuring range within									
-10 ... 0 ... 10 to -180 ... 0 ... +180									
clear output value, yet only up to -175° ... 0 ... +175° el									
5. output signal									
0 ... 20 mA						1			
4 ... 20 mA						2			
9: _____ mA						9			
0 ... 10V						A			
Z: _____ V						Z			
! 9: Nonstandard [mA]: 0 ... 1.00 to 0 ... < 20									
-1.0 ... 0 ... 1.00 to -20 ... 0 ... 20									
1 ... 5 to < (4 ... 20)									
! Z: Nonstandard [V]: 0 ... 1.0 to 0 ... < 10									
0.2 ... 1 to 2 ... 10									
-1.0 ... 0 ... 1.0 to -10 ... 0 ... 10									
6. auxiliary voltage									
Uh: 85 ... 230 V AC/DC							1		
Uh: 24 ... 60 V AC/DC							2		
from measuring input (≥ 24 ... 60 V AC)							3		
from measuring input (≥ 85 ...230 V AC)							4		
Uh: 24 V AC / 24 ... 60 V DC from							5		
low voltage side									
Uh = rated voltage									
tolerances: DC -15 ... +33 %, AC -15 ... +15 %									
! 3 and 4 not to be combined with input rated voltage order no. 2									
7. response time									
4 periods of the input frequency								1	
2 periods of the input frequency								2	
8 periods of the input frequency								3	
16 periods of the input frequency								4	
! 4 periods = standard									
8. test certificates									
without test certificate									0
with test certificate German									D
with test certificate English									E

Order Lists

EMBSIN 351 P – Measuring transducer for active power

EMBSIN 361 Q – Measuring transducer for re-active power

Features	order no.											
EMBSIN 351 P - Measuring transducer for active power order no.: 351 P - Mx xxxxxxxx	351 P-	M	X	X	X	X	X	X	X	X	X	X
EMBSIN 361 Q - Measuring transducer for re-active power order no. : 361 Q - M xxxxxxxx	361 Q-	M		X	X	X		X	X	X	X	X
1. construction housing MBS, for 35 mm DIN rail		M										
2. Application 3-/4-wire AC current, balanced (U:L1,L2,L3 I:L1)			1									
3-wire AC current, unbalanced			2									
4-phase AC current, unbalanced			3									
3. rated input frequency 50 Hz				1								
60 Hz				2								
4. input rated voltage Un: 100 ... 115 V ; _____ V values to be stated!				1								
Un: 200 ... 230 V ; _____ V				2								
Un: 380 ... 440 V ; _____ V				3								
Un: 600 ... 690 V ; _____ V				4								
Nonstandard Un: _____ V				9								
! 1 ... 4: True effective nominal voltages to be stated												
! 9: Nonstandard [V]: > 115 to < 600												
Un = linked voltage!												
5. input current In: 1 A				1								
In: 5 A				2								
6. measuring range bipolar: _____ W				1								
unipolar: _____ W				2								
measuring range end values to be stated in Watt i.e. 500W by measuring range bipolar -500 ... 500												
1000 W by measuring range unipolar 0 ... 1000												
permissible end value : $0.75 \dots 1.3 \times U_n \times I_n \times \sqrt{3} [W]$												
bipolar: _____ var				1								
unipolar: _____ var				2								
measuring range end values to be stated in var i.e. 500var by measuring range bipolar -500 ... 500												
1000 Var by measuring range unipolar 0 ... 1000												
permissible end value: $0.5 \dots 1.0 \times U_n \times I_n \times \sqrt{3} [Var]$												
7. output signal, start value bipolar, start value -100 % end value								1				
unipolar, start value 0								2				
live-zero, start value = 20 % end value								3				
! 1 output bipolar not possible with measuring range unipolar measuring range-order no. 2)												
8. output signal, end value end value: 20 mA								1				
end value: 10 mA								2				
end value: 5 mA								3				
end value: 2.5 mA								4				
end value: 10 V								A				
9. auxiliary voltage supply Uh: 85 ... 230 V DC/AC									1			
Uh: 24 ... 60 V DC/AC									2			
from measuring input ($\geq 85 \dots 230$ V AC)									4			
Uh: 24 V AC / 24 ... 60 V DC									5			
connection via low voltage side												
tolerances: DC : -15 ... +33 % ; AC: -15 ... +15 %												
! 4 not to be combined with rated input voltage order-no. 3 and 4												
10. test certificates without test certificate											0	
with test certificate German											D	
with test certificate English											E	

Order Lists

EMBSIN 301 – Measuring transducer for alternating current / RMS effective value measuring

auxiliary voltage 230 V AC

Order no.	Measuring range
137112	30 / 15 A
137113	40 / 20 A
137114	50 / 25 A
137115	60 / 30 A
137117	100 / 50 A
137118	150 / 75 A
137119	200 / 100 A
137120	250 / 125 A
137121	300 / 150 A
137122	400 / 200 A
137123	500 / 250 A
137124	600 / 300 A

auxiliary voltage 24 V DC

Order no.	Measuring range
137212	30 / 15 A
137213	40 / 20 A
137214	50 / 25 A
137215	60 / 30 A
137217	100 / 50 A
137218	150 / 75 A
137219	200 / 100 A
137220	250 / 125 A
137221	300 / 150 A
137222	400 / 200 A
137223	500 / 250 A
137224	600 / 300 A

EMBSIN 391 PV – Programmable measuring transducer for all electrical parameters

Features	Order no.										
EMBSIN 391 PV, programmable measuring transducer for all electrical parameters order no.: 391 P - Vxxxxxxxxx	391 P -	V	X	X	X	X	X	X	X	X	X
1. application											
single-phase alternating current			1								
3-wire direct current, balanced			2								
3-wire direct current, unbalanced			3								
4-wire direct current, balanced			4								
4-wire alternating current, unbalanced			5								
2. nominal range of the input voltage											
input voltage direct connection											
input voltage via voltage transformer				A							
0 ... 50 V AC (linked voltage!)											
please state value!					1						
0 ... 500 V AC (linked voltage!)											
please state value!						2					
3. nominal value of the input current											
input current via current transformer						B					
0 ... 0.5 A AC, please state value!							1				
0 ... 5.0 A AC, please state value!								2			
4. auxiliary voltage											
universal power supply								1	0		
(24 ... 300 V DC/ 40 ... 276 V AC)											
AC-voltage supply (!)											
(!) units with this type of auxiliary voltage supply have only one											
analogue measuring output								2			
AC-voltage supply											
57.74 V AC									1		
63.5 V AC									2		
100 V AC									3		
110 V AC									4		
230 V AC									5		
250 V AC									6		
400 V AC									7		
500 V AC									8		
5. type of serial interface											
RS232										1	
RS485										2	
6. state upon delivery											
transmission parameters are not set											0
parameters are arranged acc. to customer specification											1

Order Lists

ordering schedule 1

EMBSIN 391 PV – Programmable measuring transducer for all electrical parameters

Description		Code
measuring volume		
true-rms-current		
application		
single-phase alternating current	L	I ₁ , I ₂ , I ₃
alternating current, three-phase system	L ₁ , L ₂ or L ₃	I _N or I
measuring range	0 ... 0.5 A to 0 ... 5 A	____ A
true-rms-voltage		
single-phase alternating current	U	____
	phase to N	
	U ₁ , U ₂ or U ₃	
alternating current	linked voltage	____
	U ₁ -U ₂ , U ₂ -U ₃ or U ₃ -U ₁	
measuring range	0 ... 50 V to 0 ... 500 V	0 - ____ V
frequency		
all connections	system frequency	____ Hz
measuring range	45 Hz ≤ f ≤ 65 Hz (f ₁ ≤ f ≤ f ₂)	__ ≤ f ≤ __ Hz
phase angle		
single-phase alternating current		
alternating current, three-phase system	φ ₁ , φ ₂ , φ ₃ (U - I) φ ₁₂ , φ ₁₃ , φ ₂₃ (U ₁ -U ₂ , U ₁ -U ₃ , U ₂ -U ₃) average value φ	
measuring range	-180° ≤ φ ≤ 180° defined range (φ ₁ ≤ φ ≤ φ ₂)	
power factor		
single-phase alternating current	PF	
alternating current	PF ₁ , PF ₂ or PF ₃ PF total supply network	
measuring range	-1 ≤ PF ≤ +1 defined range	
active power		
single-phase alternating current	P	
alternating current, three-phase system	P ₁ , P ₂ or P ₃ P-total	____ W ____ W
measuring range	dependent on input value U, I (+/-) ... W	
re-active power		
single-phase alternating current	Q	
alternating current, three-phase system	Q ₁ , Q ₂ or Q ₃ Q-total	____ var ____ var
measuring range	dependent on input value U, I (+/-) ... var	

Order Lists

ordering schedule 2

EMBSIN 391 PV – Programmable measuring transducer for all electrical parameters

Description	Code	
measuring volume		
apparent power (VA)		
single-phase alternating current	S	_____
alternating current, three-phase system	S ₁ , S ₂ or S ₃ S total	_____
measuring range	dependent on value U, I (+/-) ... VA	___VA ... VA
retrievable available values		
current phases I ₁ , I ₂ , I ₃	I ₁ , I ₂ or I ₃	DDI ₁ , DDI ₂ , DDI ₃
mean value of the total apparent power	S total	DDSt
total active power	P-total positive P-total negative	DDPt+ DDPt-
total re-active power	Q-total -L Q-total +C	DDQtL DDQtC
measuring range	dependent on the type of inquiry	_____
type of output characteristic		
type of output characteristic	linear curved (1)	L B
(1) when ordering curved output characteristics please refer to the additional information in table 3		
outputs		
start value of the output signals	-20 mA ≤ I ≤ +20 mA current -10 V ≤ U ≤ +10 V voltage	_____mA _____V
output value	0 ... 20 mA current output 0 ... 10 V voltage output	_____mA _____V
standard output values		0 ... 1 mA 0 ... 5 mA 0 ... 10 mA 0 ... 20 mA 4 ... 20 mA -1 ... 0 ... +1 mA -10 ... 0 ... +10 mA -20 ... 0 ... +20 mA 0 ... 10 V -1 ... 0 ... +1 V -10 ... 0 ... +10 V

All output signals are limited to 120 % of the rated nominal value

ordering schedule 3

EMBSIN 391 PV - Programmable measuring transducer for all electrical parameters

Table 3

Additional information when ordering measuring transducers with curved output characteristics

When ordering measuring transducers with curved characteristics the start and end points as well as the position of the required curved break of the to be adjusted transmission ratio have to be defined. Measuring transducers of the type **EMBSIN 391 PV** allow the presentation of transmission characteristics of up to 5 curved breaks .


Description	Code	
start value of the measuring value (s)	dependent on measuring range s	
start value of the output value	-20 mA ... +20 mA/ -10 V ... +10 V dependent on output range -20 ≤ p ≤ +20/ -10 ≤ p ≤ +10	p
end value of the measuring value (e)	dependent on measuring range	e
end value of the output value (rt) if measuring value (e)	-20 mA ... +20 mA/ -10 V ... +10 V dependent on output range	rt
value of the measuring value (n _x)	dependent on measuring range	n ₁ ... n ₅
value of the output value (o _x) if measuring value (n _x)	-20 mA ... +20 mA/ -10 V ... +10 V dependent on output range -20 ≤ p ≤ +20/ -10 ≤ p ≤ +10	o ₁ ... o ₅

Ordering example:

The measuring transducer EMBSIN 391 PV is installed into a 4-wire alternating current supply network with balanced phase-loads. The measuring transducer is connected via a voltage transformer 100/0.11 kV as well as to a current transformer of 200/5 A. The auxiliary voltage supply of the measuring transducer is effected by means of an integrated power unit. For the communication an interface of RS485 is required. The following measuring values must be included in the measuring feeds:

Output 1	
total output of the system	-40 ... +40 MW
output current	-20...+20 mA
transmission ratio	linear
Output 2	
measuring value	phase angle
output voltage	0 ... 10 V
	start value: $-180^\circ = -10\text{ V}$
	curved point: $0^\circ = 10\text{ V}$
	end value: $179.9^\circ = 10\text{ V}$
Output 3	
measuring value	system frequency 45 ... 55 Hz
current output	0 ... 20 mA
	48 Hz = 2 mA
	52 Hz = 18 mA
	55 Hz = 20 mA

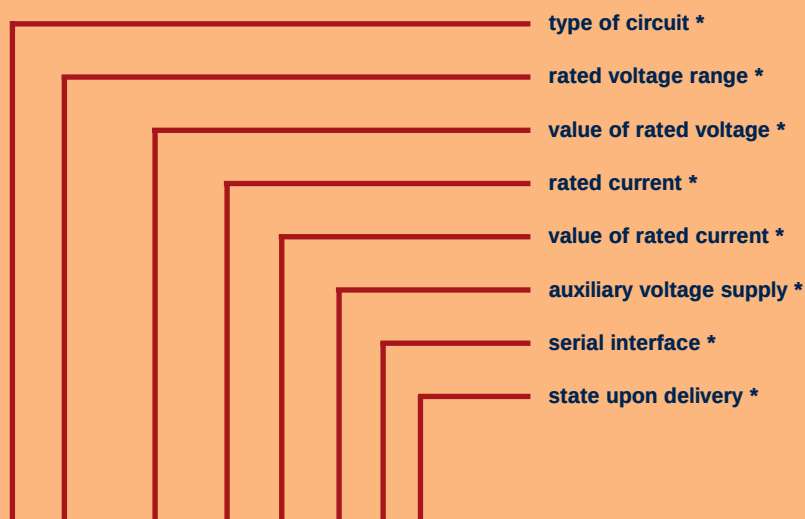Ordering text: EMBSIN 391 P - V-4; A2, 110 V; B2, 5 A; 10; 2, 1
 output 1: $P \pm 40\text{ MW}$; L; -20...200 mA
 output 2: $\varphi \pm 180^\circ$; B; (180/-10; 0/0; 180/10)
 output 3: f 45...55 Hz; B; (45/0, 48/2, 52/18, 55/20)



EMBSIN 391P – V-4; A2, 110 V, B2, 5A; 10; 2; 1

* order code of table 1, page 282

Standard Units

EMBSIN 100 I	Measuring transducer for AC current, without auxiliary voltage supply	288
EMBSIN 101 I	Measuring transducer for AC current, with auxiliary voltage supply	288
EMBSIN 201 IE	Measuring transducer for AC current, rms measurement	288
EMBSIN 120 U	Measuring transducer for AC voltage, without auxiliary voltage supply	288
EMBSIN 121 U	Measuring transducer for AC voltage, with auxiliary voltage supply	289
EMBSIN 221 UE	Measuring transducer for AC voltage, rms measurement	289
EMBSIN 241 F	Measuring transducer for frequency for universal AC/DC power supply	289
EMBSIN 281 G	Measuring transducer for power factors, with universal AC/DC power supply	289
EMBSIN 351 P	Measuring transducer for active power, with universal AC/DC power supply	290
EMBSIN 361 Q	Measuring transducer for re-active power, with universal AC/DC power supply	290

Standard Units

EMBSIN 100 I Measuring transducer for alternating current, without auxiliary voltage, with 2 measuring ranges

Construction	Rated frequency	Measuring range	Output signal	Art.-no.
		0 ... 1.0 A / 5 A	0 ... 5 mA	127 698
housing		0 ... 1.0 A / 5 A	0 ... 10 mA	127 705
MBS	50/60 Hz	0 ... 1.0 A / 5 A	0 ... 20 mA	127 713
for 35 mm		0 ... 1.2 A / 6 A	0 ... 5 mA	127 721
DIN rail		0 ... 1.2 A / 6 A	0 ... 10 mA	127 739
		0 ... 1.2 A / 6 A	0 ... 20 mA	127 747

EMBSIN 101 I Measuring transducer for alternating current, with auxiliary voltage

Construction	Rated frequency	Measuring range	Output signal	Auxiliary voltage	Art.-no.
		0 ... 1 A	0 ... 20 mA	230 V AC	128 290
		0 ... 5 A	0 ... 20 mA	230 V AC	128 307
housing		0 ... 1 A	4 ... 20 mA	230 V AC	128 331
MBS	50/60 Hz	0 ... 5 A	4 ... 20 mA	230 V AC	128 349
for 35 mm		0 ... 1 A	0 ... 20 mA	24 V DC	128 315
DIN rail		0 ... 5 A	0 ... 20 mA	24 V DC	128 323
		0 ... 1 A	4 ... 20 mA, 2-wire	24 V DC	128 357
		0 ... 5 A	4 ... 20 mA, 2-wire	24 V DC	128 365

EMBSIN 201 IE Measuring transducer for alternating current, with auxiliary voltage, with 2 measuring ranges, effective value measuring

Construction	Rated frequency	Measuring range	Output signal	Auxiliary voltage DC or AC 40...400 Hz	Art.-no.
housing		0 ... 1.0 A / 5 A	0 ... 20 mA		128 232
MBS		0 ... 1.0 A / 5 A	4 ... 20 mA	85 ... 230 V	128 240
for 35 mm	50/60 Hz	0 ... 1.2 A / 6 A	0 ... 20 mA		128 258
DIN rail		0 ... 1.2 A / 6 A	4 ... 20 mA		128 266

Response time of the output value: 300 ms

EMBSIN 120 U Measuring transducer for alternating voltage, without auxiliary voltage supply

Construction	Rated frequency	Measuring range	Output signal	Art.-no.
		0 ... 100 / $\sqrt{3}$ V	0 ... 5 mA	127 854
		0 ... 100 / $\sqrt{3}$ V	0 ... 20 mA	127 862
		0 ... 110 / $\sqrt{3}$ V	0 ... 5 mA	127 870
		0 ... 110 / $\sqrt{3}$ V	0 ... 20 mA	127 888
housing		0 ... 100 V	0 ... 5 mA	127 896
MBS		0 ... 100 V	0 ... 20 mA	127 903
for 35 mm	50/60 Hz	0 ... 110 V	0 ... 5 mA	127 911
DIN rail		0 ... 110 V	0 ... 20 mA	127 929
		0 ... 120 V	0 ... 5 mA	127 953
		0 ... 120 V	0 ... 20 mA	127 961
		0 ... 250 V	0 ... 5 mA	127 937
		0 ... 250 V	0 ... 20 mA	127 945
		0 ... 500 V	0 ... 5 mA	127 979
		0 ... 500 V	0 ... 20 mA	127 987

Standard Units

EMBSIN 121 U Measuring transducer for alternating voltage, with auxiliary voltage supply

Construction	Rated frequency	Measuring range	Output signal	Auxiliary voltage	Art.-no.
		0 ... 100 V	0 ... 20 mA	230 V AC	127 341
		0 ... 250 V	0 ... 20 mA	230 V AC	127 359
housing		0 ... 500 V	0 ... 20 mA	230 V AC	127 383
MBS	50/60 Hz	0 ... 100 V	0 ... 20 mA	24 V DC	127 367
for 35 mm		0 ... 250 V	0 ... 20 mA	24 V DC	127 375
DIN rail		0 ... 100 V	4 ... 20 mA, 2-wire	24 V DC	127 391
		0 ... 250 V	4 ... 20 mA, 2-wire	24 V DC	127 408
		0 ... 500 V	4 ... 20 mA, 2-wire	24 V DC	127 416

EMBSIN 221 UE Measuring transducer for alternating voltage, with auxiliary voltage supply, effective value measuring

Construction	Rated frequency	Measuring range	Output signal	Auxiliary voltage DC or AC 40...400 Hz	Art.-no.
		0 ... 100 V	0 ... 20 mA		127 440
		0 ... 100 V	4 ... 20 mA		127 458
housing		0 ... 120 V	0 ... 20 mA		127 466
MBS	50/60 Hz	0 ... 120 V	4 ... 20 mA	85 ... 230 V	127 474
for 35 mm		0 ... 250 V	0 ... 20 mA		127 507
DIN rail		0 ... 250 V	4 ... 20 mA		127 515
		0 ... 500 V	0 ... 20 mA		127 482
		0 ... 500 V	4 ... 20 mA		127 490

response time of the output signal: 300 ms

EMBSIN 241 F Measuring transducer for frequency, with auxiliary voltage supply

Construction	Input voltage	Measuring range	Output signal	Auxiliary voltage DC or AC 40...400 Hz	Art.-no.
		45 ... 55 Hz	0 ... 20 mA		127 549
	10 ... 230 V	45 ... 55 Hz	4 ... 20 mA		127 557
housing		48 ... 52 Hz	0 ... 20 mA		127 573
MBS		48 ... 52 Hz	4 ... 20 mA	85 ... 230 V	127 565
for 35 mm		45 ... 55 Hz	0 ... 20 mA		127 581
DIN rail	230 ... 690 V	45 ... 55 Hz	4 ... 20 mA		127 606
		48 ... 52 Hz	0 ... 20 mA		127 599
		48 ... 52 Hz	4 ... 20 mA		127 614

response time of the output volume: 4 periods of the input frequency

EMBSIN 281 G Measuring transducer for active power factor, with auxiliary voltage supply

Construction	Input volumes	Output signal	Application	Auxiliary voltage DC or AC 40...400 Hz	Art.-no.
housing	230 V AC (L1-N)	0 ... 20 mA	single-phase		127 648
MBS	and 5 A (L1)	4 ... 20 mA	alternating current	85 ... 230 V	127 664
for 35 mm	400 V AC (L1-L2)	0 ... 20 mA	3- or 4-wire		127 656
DIN rail	and 5 A (L1)	4 ... 20 mA	direct current, balanced load		127 672

response time of the output volume: 4 periods of the input frequency
 rated frequency of the input volume: 50 Hz
 measuring range: 0.5...cap...1...ind...0.5 cos phi
 output volume: proportional cos phi

Standard Units

EMBSIN 351 P Measuring transducer for active power, with auxiliary voltage supply

Construction	Measuring inputs	Output signal	Application	Auxiliary voltage DC or AC 40...400 Hz	Art.-no.
housing	U_n : L ₁ , L ₂ , L ₃ I_n : L ₁	4 ... 20 mA	3-wire direct current balanced load		137 770
MBS	U_n : L ₁ , L ₂ , L ₃ I_n : L ₁ and L ₃	4 ... 20 mA	3-wire direct current unbalanced load	85 ... 230 V	137 788
for 35 mm					
DIN rail	U_n : L ₁ , L ₂ , L ₃ I_n : L ₁ , L ₂ , L ₃	4 ... 20 mA	4-wire direct current unbalanced load		137 796

input rated voltage U_n : 400 V (linked voltage!)
 input rated current: 5 A
 rated frequency measuring input: 50 Hz
 measuring range: 0 ... 2 kvar

EMBSIN 361 Q Measuring transducer for re-active power, with auxiliary voltage supply

Construction	Measuring inputs	Output signal	Application	Auxiliary voltage DC or AC 40...400 Hz	Art.-no.
housing					
MBS	U_n : L ₁ , L ₂ , L ₃ I_n : L ₁ and L ₃	4 ... 20 mA	3-wire alternating current unbalanced load	85 ... 230 V	137 803
for 35 mm					
DIN rail					

input rated voltage U_n : 400 V (linked voltage!)
 input rated current: 5 A
 rated frequency measuring input: 50 Hz
 measuring range: 0 ... 2 kvar

Electronic energy meter for industrial applications

Single-phase energy meter, direct measuring, clip-on onto 35 mm DIN rail

					page
ECP6112	2-wire	1 S0-impulse output	kWh	5 (32) A	.292
ECP6152	2-wire	1 S0-impulse output, LCD	kWh	5 (32) A	.293
EMU6114	2-wire	1 S0-impulse output	kWh	5 (63) A	.294
EMU6124	2-wire	1 S0-impulse output	2 tariffs kWh	5 (63) A	.295

Single-phase energy and power meter, direct measuring (suitable for socket)

EMU6557	2-wire	cable connection	kWh	16 A	.296
EMU6657	2-wire	suitable for socket	kWh	16 A	.297

Three-phase energy meter, direct measuring, clip-on onto 35 mm DIN rail

EEH1116	4-wire	1 S0-impulse output	kWh / kvarh	10 (63) A	.298
EEH1126	4-wire	1 S0-impulse output	2 tariffs +/-kWh / kvarh	10 (63) A	.299
EEH1176	4-wire	1 S0-impulse output, LCD	2 tariffs +/-kWh / kvarh	10 (63) A	.300
EEH2116	3-wire	1 S0-impulse output	kWh / kvarh	10 (63) A	.301
EEH2126	3-wire	1 S0-impulse output	2 tariffs +/-kWh / kvarh	10 (63) A	.302
EEH2176	3-wire	1 S0-impulse output, LCD	2 tariffs +/-kWh / kvarh	10 (63) A	.303

Three-phase energy transformer meter, clip-on onto 35 mm DIN rail

EEH1115	4-wire	1 S0-impulse output	kWh / kvarh	5 A, 1 A	.304
EEH1125	4-wire	1 S0-impulse output	2 tariffs +/-kWh / kvarh	5 A, 1 A	.305
EEH1175	4-wire	1 S0-impulse output, LCD	2 tariffs +/-kWh / kvarh	5 A, 1 A	.306
EEH2115	3-wire	1 S0-impulse output	kWh / kvarh	5 A, 1 A	.307
EEH2125	3-wire	1 S0-impulse output	2 tariffs +/-kWh / kvarh	5 A, 1 A	.308
EEH2175	3-wire	1 S0-impulse output, LCD	2 tariffs +/-kWh / kvarh	5 A, 1 A	.309
EWS1915	4-wire	with relay impulse output	+/-kWh / kvarh	5 A, 1 A	.310
EWS1945	4-wire	with relay impulse output	2 electro-mechanical counters +/-kWh / kvarh	5 A, 1 A	.311
EWS1995	4-wire	with relay impulse output, LCD	2 electro-mechanical counters +/-kWh / kvarh	5 A, 1 A	.312

Three-phase energy transformer meter for front panel mounting, 96 x 96 mm

EWQ1915	4-wire	with relay impulse output	+/-kWh / kvarh	5 A, 1 A	.313
EWQ1945	4-wire	with relay impulse output	2 electro-mechanical counters +/-kWh / kvarh	5 A, 1 A	.314
EWQ1995	4-wire	with relay impulse output, LCD	2 electro-mechanical counters +/-kWh / kvarh	5 A, 1 A	.315






ECP6112


Single-phase energy meter,
direct measuring

AC energy meter for clip-on onto 35 mm DIN rail

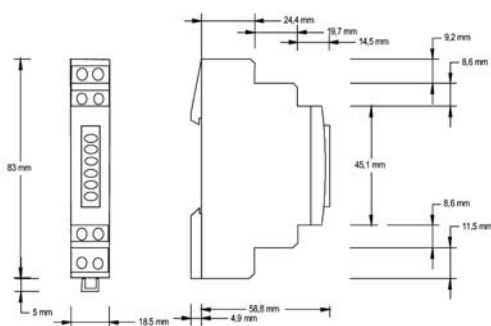drawing



connection diagram

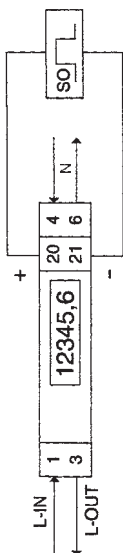

Type of energy meter		ECP6112
Mains	2-wire	L-N (230 V)
	rated voltage U_N	230 V
	tolerance value:	-30 %...+30 %
	frequency	50 Hz
Output	1 S0-impulse output	
	optocoupler	max. 27 V DC / 10 up to 27 mA
	output impulse	1000 Imp/kWh
	connection terminal	20, 21
Counter	1 counter meter for active energy (kWh)	
	electro-mechanical meter	
	number of digits	6 (5.1 digits)
	digit height	4 mm
	digit width	2 mm
Current range	function control	flashing LED 1000 Imp/kWh
	5 (32) A	
	nominal current I_N	5 A
	max. current (I_{max})	32 A
	start current	0.004 I_N
Technical data	energy consumption	0.4 W
	accuracy class	class 1
	ambient temperature	-25 °C to +55 °C
	connections	1...6 mm ²
	dimensions (mm)	18.6 x 91 x 64
	weight	0.08 kg




ECP6152


Single-phase energy meter,
direct measuring

AC energy meter for clip-on onto 35 mm DIN rail

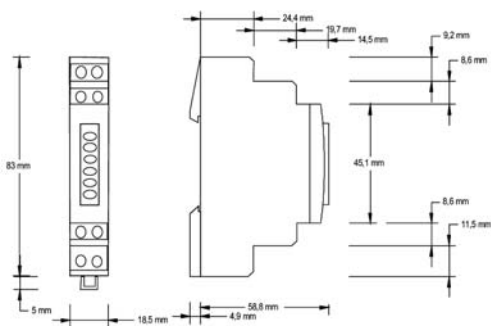drawing



connection diagram

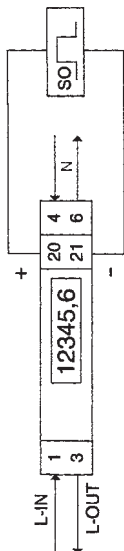

Type of energy meter		ECP6152
Mains	2-wire	L-N (230 V)
	rated voltage U_N	230 V
	tolerance value:	-30 %...+30 %
	frequency	50 Hz
Output	1 S0-impulse output	
	optocoupler	max. 27 V DC / 10 up to 27 mA
	output impulse	1000 Imp/kWh
	connection terminal	20, 21
Counter	LCD counter meter for active energy (kWh)	
	LCD counter meter	
	number of digits	6 (5.1 digits)
	digit height	4 mm
	digit width	2 mm
Current range	function control	flashing LED 1000 Imp/kWh
	5 (32) A	
	nominal current I_N	5 A
	max. current (I_{max})	32 A
	start current	0.004 I_N
Technical data	energy consumption	0.4 W
	accuracy class	class 1
	ambient temperature	-25 °C to +55 °C
	connections	1...6 mm ²
	dimensions (mm)	18.6 x 91 x 64
	weight	0.08 kg



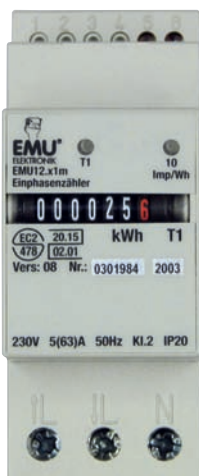


photo is similar to the original

drawing



diagram

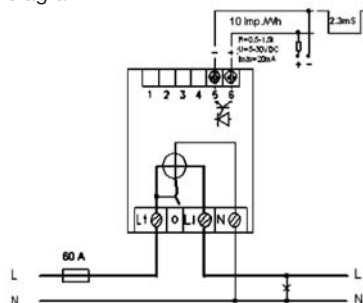

EMU6114

Single-phase energy meter



AC energy meter for clip-on onto 35 mm DIN rail
These energy meters are suitable for calibration

Type of energy meter		EMU12.x1m
Mains	2-wire	L-N (230 V)
	rated voltage U_N	230 V
	tolerance value	-20 %...+20 %
	frequency	50 Hz
	frequency range	45...65 Hz
Output (S0+/S0-) collector open	1 S0-impulse output	
	optocoupler	5-30 V DC / 20 mA max.
	impulse duration	125 ms
	output impulse	10 Imp/kWh
	impedance	0.5 – 1.5 kOhm
	connection terminal	5 / 6
Counter	1 counter meter for active energy (kWh)	
	electro-mechanical meter	
	number of digits	7 (6.1 digits)
	digit height	4 mm
	digit width	1.2 mm
	operating display	green LED
	LED test	10 Imp/Wh (invisible)
Current range	5 (63) A	
	nominal current I_N	5 A
	max. current (I_{max})	63 A
	consumption	0.8 W
	start current	0.005 I_N
Technical data	approbations	PTB approval
	accuracy class	class 2, DIN EN 61036, active energy
	ambient temperature	-10 °C to +50 °C
	protection class	
	housing	IP 51
	main connections	1 ... 10 mm ²
	SO-impulse output	max. 2.5 mm ²
	dimensions (mm)	36 x 90 x 71
	weight	0.15 kg




photo is similar to the original

drawing



diagram



EMU6124

Single-phase energy meter

AC energy meter for clip-on onto 35 mm DIN rail
These energy meters are suitable for calibration

Type of energy meter		EMU12.x1m
Mains	2-wire	L-N (230 V)
	rated voltage U_N	230 V
	tolerance value	-20 %...+20 %
	frequency	50 Hz
	frequency range	45...65 Hz
Output (S0+/S0-) collector open	1 S0-impulse output	
	optocoupler	5-30 V DC / 20 mA max.
	impulse duration	125 ms
	output impulse	10 Imp/kWh
	impedance	0.5 – 1.5 kOhm
Counter	connection terminal	5 / 6
	2 counter meters for active energy HT-NT (kWh)	
	2 electro-mechanical meters	
	number of digits	7 (6.1-digits)
	digit height	4 mm
Current range	digit width	1.2 mm
	operating display	green LED (active tariff)
	LED test	10 Imp/Wh (invisible)
	nominal current I_N	5 A
	max. current (I_{max})	63 A
Technical data	consumption	0.8 W
	start current	0.005 I_N
	approbations	PTB approval
	accuracy class	class 2, DIN EN 61036, active energy
	ambient temperature	-10 °C to +50 °C
	protection class	IP 51
	housing	IP 51
	main connections	1 ... 10 mm ²
	S0-impulse output	max. 2.5 mm ²
	dimensions (mm)	36 x 90 x 71
	weight	0.17 kg
	tariff control	230 V AC
	Tariff 2 is energized when terminals 1 and 3 are under load of 230 V AC	



EMU6557

Single-phase energy meter

Socket meter

Type of energy meter		EMU1.x4
Mains	2-wire	L-N (230 V)
	rated voltage U_N	176 - 264 V
	frequency	50 Hz
	frequency range	45...65 Hz
Output		cable connection
Counter	LCD counter for active energy	
	— continuous active energy Wh/kWh	
	— price per kWh	
	— total energy costs	
	— present active power W/kW	
	— present voltage V	
	— present current supply A	
	number of digits	4 (3.1 digits)
	digit height	13 mm
	digit width	7.5 mm
	function control	display test in all functions during start
Current range		16 A
	nominal current I_N	16 A
	start current	10 mA
Technical data		
	accuracy class	class 2, IEC 348; IEC 1036, active energy
	ambient temperature	-10 °C to +50 °C
	protection class	1 IP 20
	connection	0.01 - 16 A (euro-plug)
	dimensions (mm)	130 x 67 x 73
	weight	0.36 kg
	cable length	1.00 m




EMU6657

Single-phase energy meter


Socket meter

Type of energy meter		EMU-Check
Mains	2-wire	L-N (230 V)
	rated voltage U_N	140 - 264 V
	frequency	50 Hz
	frequency range	45...65 Hz
Output		socket
Counter		LCD counter for active energy
		— continuous active power Wh/kWh
		— level (adjusted starting value in kW)
		— time (total time via level in h)
		— present active power W/kW
		— present voltage V
		— present current supply A
		— present power factor
		number of digits 6 (5.1 digits)
		digit height 7 mm
		digit width 3.5 mm
		function control display test in all functions during start
Current range		16 A
		nominal current I_N 16 A
		start current 10 mA
Technical data		
		accuracy class class 2, IEC 1036, active energy
		ambient temperature -10 °C to +50 °C
		protection class 1 IP 20
		connections 0.01 - 16 A (euro-plug)
		dimensions (mm) 130 x 67 x 73
		weight 0.15 kg

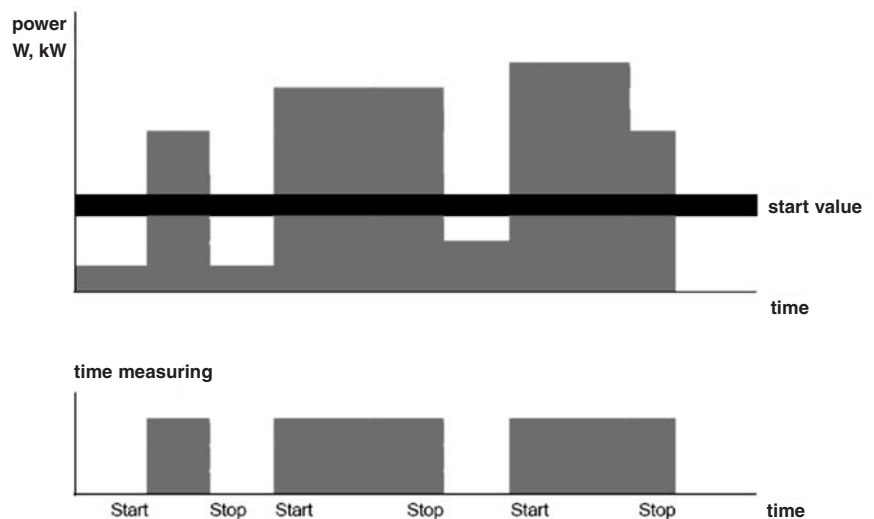





drawing

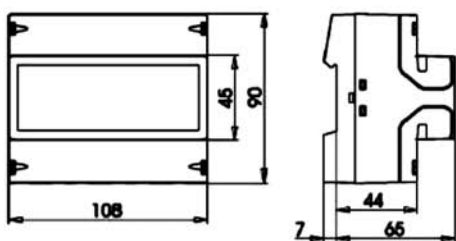

diagram

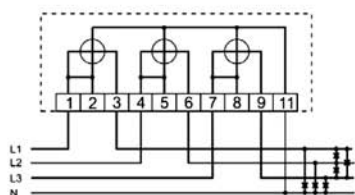

Option EEH5116
equally load phases

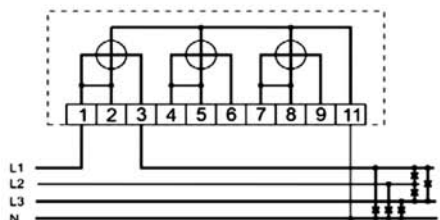

EEH1116


Three-phase energy meter

AC energy meter for clip-on onto 35 mm DIN rail


Type of energy meter		EEH1116
Mains		4-wire L-N (230 V) rated voltage U_N 230 V tolerance value -20 %...+15 % consumption < 3.0 W/phase frequency 50 Hz frequency range 45...65 Hz
Output		1 S0-impulse output optocoupler 40 V / 27 mA max. impulse duration 100 ms +/-50 % collector open output impulse 1000 Imp/kWh connection terminal 40 / 41
(option) communication		RS485 connection multi-drop cable type screened, wound pair max. cable length 1000 m connection terminal screw isolation 3.7 kV rms for 1 min. between all meters and other units transmission system asynchronous format type MODBUS RTU transmission time 1200 to 19200 bits/s connection A and B 120 Ohm max. linked meters 32
Counter		1 counter meter for active energy (kWh) electro-mechanical meter number of digits 7 (6.1 digits) digit height 4 mm digit width 1.2 mm LED test 1000 Imp/kWh (red) LED operation status (red)
(option) 1 meter for reactive energy (kvarh)		EEH1106
Current range		10 (63) A nominal current I_N 10 A max. current I_{max} 63 A consumption < 0.02 W/phase start current 0.004 I_N
Technical data		approbations active energy EN 61036 class 1 reactive energy EN 61268 class 2 construction housing PA6.6 in conformity with UL 94 V-0 dimensions (mm) 108 x 90 x 72 weight 0.6 kg mounting DIN rail acc. to DIN EN 50022 climatic conditions EN 61036 interior meter ambient temperature operation -20 °C to +55 °C storage -25 °C to +70 °C protection class 2 current terminals < 16 mm ² control terminals < 2.5 mm ²



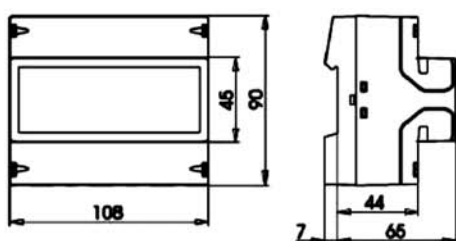
drawing



diagram

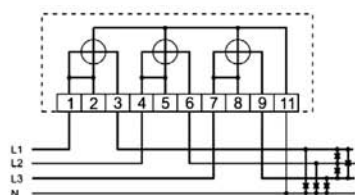

Option EEH5226
equally load phases

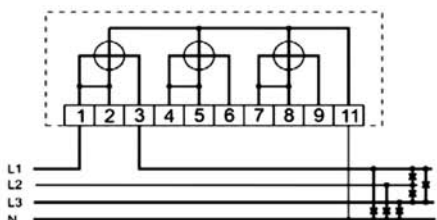

EEH1126

Three-phase energy meter

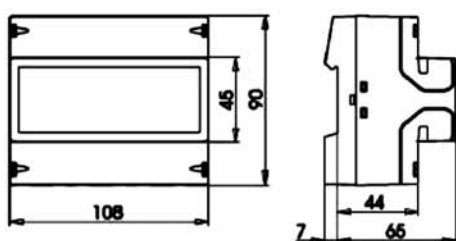
AC energy meter for dual tariff, suitable for clip-on onto 35 mm DIN rail

Type of energy meter		EEH1126
Mains	4-wire	L-N (230 V)
	rated voltage U_N	230 V
	tolerance value	-20 %...+15 %
	consumption	< 3.0 W/phase
	frequency	50 Hz
	frequency range	45...65 Hz
Output	1 S0-impulse output	
	optocoupler	40 V / 27 mA max.
(S0)	impulse duration	100 ms +/-50 %
	output impulse	1000 Imp/kWh
collector open	connection terminal	40 / 41 / 42
(option)	communication	RS485
	connection	multi-drop
	cable type	screened, wound pair
	max. cable length	1000 m
	connection	terminal screw
	isolation	3.7 kV rms for 1 min. between all meters and other units
	transmission system	asynchronous
	format type	MODBUS RTU
	transmission time	1200 to 19200 bits/s
	connection A and B	120 Ohm
	max. linked meters	32
Counter	2 counter meters for active energy HT-NT (kWh)	
	2 electro-mechanical meters	
	number of digits	7 (6.1 digits)
	digit height	4 mm
	digit width	1.2 mm
	LED test	1000 Imp/kWh (red)
	LED operation	status (tariffs) (red)
(option)	2 meters for active/reactive energy (kvarh)	EEH1236
	2 meters for active energy (import/export) (kWh)	EEH1246
Current range	10 (63) A	
	nominal current I_N	10 A
	max. current I_{max}	63 A
	consumption	< 0.02 W/phase
	start current	0.004 I_N
Technical data		
construction	approbations	
	active energy	EN 61036 class 1
	reactive energy	EN 61268 class 2
construction	housing	PA6.6 in conformity with UL 94 V-0
	dimensions (mm)	108 x 90 x 72
	weight	0.6 kg
ambient temperature	mounting	DIN rail acc. to DIN EN 50022
	climatic conditions	EN 61036 interior meter
	operation	-20 °C to +55 °C
storage	storage	-25 °C to +70 °C
	protection class	2
	current terminals	< 16 mm ²
tariff start	control terminals	< 2.5 mm ²
	tariff start	230 V AC
	Tariff 2 is energized when terminals 13 and 15 are under load of 230 V AC	


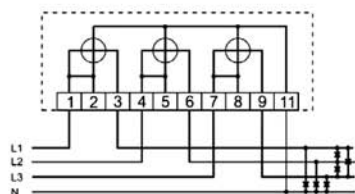


photo is similar to the original

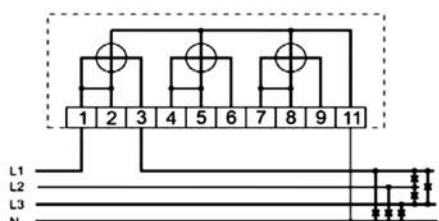drawing



diagram

Option EEH5276
equal load phases

EEH1176

Three-phase energy meter

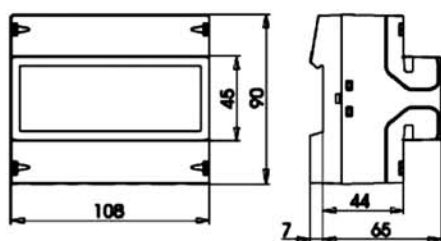
AC energy meter for dual tariff, suitable for clip-on onto 35 mm DIN rail

Type of energy meter		EEH1176
Mains	4-wire	L-N (230 V)
	rated voltage U_N	230 V
	tolerance value	-20 %...+15 %
	consumption	< 3.0 W/phase
	frequency	50 Hz
	frequency range	45...65 Hz
Output		1 S0-impulse output
(S0) collector open	optocoupler	40 V / 27 mA max.
	impulse duration	100 ms +/-50 %
	output impulse	1000 Imp/kWh
	connection terminal	40 / 41
(option) communication	RS485	EEH1476
	connection	multi-drop
	cable type	screened, wound pair
	max. cable length	1000 m
	connection	terminal screw
	isolation	3.7 kV rms for 1 min. between all meters and other units
	transmission system	asynchronous
	format type	MODBUS RTU
	transmission time	1200 to 19200 bits/s
	connection A and B	120 Ohm
	max. linked meters	32
Counter		LCD counter meter for active energy HT-NT (kWh)
	LCD counter	
	number of digits	2 x 9 (8.1 digits)
	digit height	4.86 mm
	digit width	2.96 mm
(option)		
2 meters for active/reactive energy (kvarh)		EEH1286
2 meters for active energy (import/export) (kWh)		EEH1296
Current range		10 (63) A
	nominal current I_N	10 A
	max. current I_{max}	63 A
	consumption	< 0.02 W/phase
	start current	0.004 I_N
Technical data		
construction	approbations	
	active energy	EN 61036 class 1
	reactive energy	EN 61268 class 2
	housing	PA6.6 in conformity with UL 94 V-0
	dimensions (mm)	108 x 90 x 72
ambient temperature	weight	0.6 kg
	mounting	DIN rail acc. to DIN DIN EN 50022
	climatic conditions	EN 61036 interior meter
	operation	-20 °C to +55 °C
	storage	-25 °C to +70 °C
	protection class	2
	current terminals	< 16 mm ²
	control terminals	< 2.5 mm ²
	tariff start	230 V AC
	Tariff 2 is energized when terminals 13 and 15 are under load of 230 V AC	

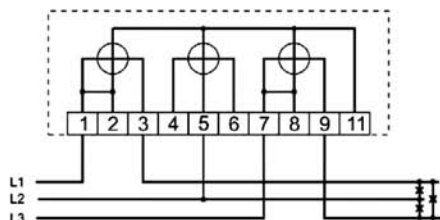


photo is similar to the original

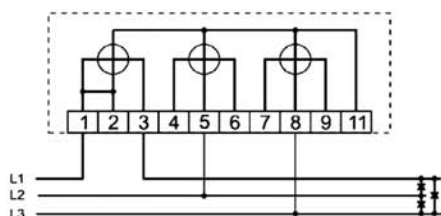
drawing



diagram



option EEH8116
equally load phases



EEH2116

Three-phase energy meter

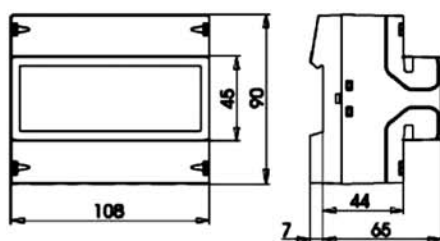
AC energy meter for dual tariff, suitable for clip-on onto 35 mm DIN rail

Type of energy meter		EEH2116
Mains	3-wire	L-L (400 V)
	rated voltage U_N	230 V
	tolerance value	-20 %...+15 %
	consumption	< 3.0 W/phase
	frequency	50 Hz
	frequency range	45...65 Hz
Output		1 S0-impulse output
(S0) collector open	optocoupler	40 V / 27 mA max.
	impulse duration	100 ms +/-50 %
	output impulse	1000 Imp/kWh
	connection terminal	40 / 41
(option) communication	RS485	EEH2316
	connection	multi-drop
	cable type	screened, wound pair
	max. cable length	1000 m
	connection	terminal screw
	isolation	3.7 kV rms for 1 min. between all meters and other units
	transmission system	asynchronous
	format type	MODBUS RTU
	transmission time	1200 to 19200 bits/s
	connection A and B	120 Ohm
	max. linked meters	32
Counter		1 counter meter for active energy (kWh)
	electro-mechanical meter	
	number of digits	7 (6.1 digits)
	digit height	4 mm
	digit width	1.2 mm
	LED test	1000 Imp/kWh (red)
	LED operations	status (red)
(option) 1 meter for reactive energy (kvarh)		EEH2106
Current range		10 (63) A
	nominal current I_N	10 A
	max. current I_{max}	63 A
	consumption	< 0.02 W/phase
	start current	0.004 I_N
Technical data		
construction	approbations	
	active energy	EN 61036 class 1
	reactive energy	EN 61268 class 2
	housing	PA6.6 in conformity with UL 94 V-0
	dimensions (mm)	108 x 90 x 72
ambient temperature	weight	0.6 kg
	mounting	DIN rail acc. to DIN EN 50022
	climatic conditions	EN 61036 interior meter
	operation	-20 °C to +55 °C
	storage	-25 °C to +70 °C
	protection class	2
	current terminals	< 16 mm ²
	control terminals	< 2.5 mm ²

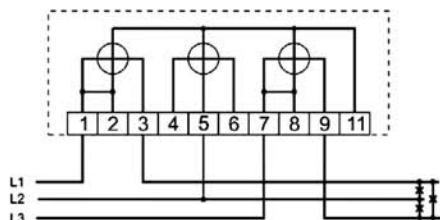


photo is similar to the original

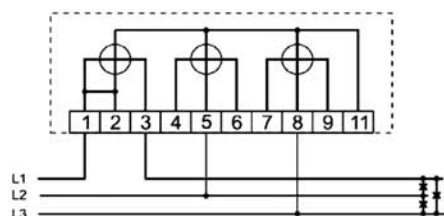
drawing



diagram



option EEH8226
equally load phases



EEH2126

Three-phase energy meter

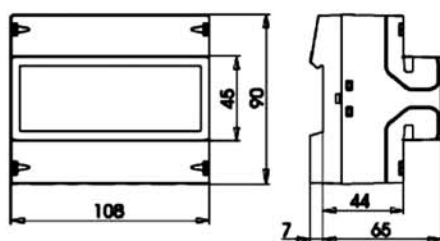
AC energy meter for dual tariff, suitable for clip-on onto 35 mm DIN rail

Type of energy meter		EEH2126
Mains	3-wire	L-L (400 V)
	rated voltage U_N	230 V
	tolerance value	-20 %...+15 %
	consumption	< 3.0 W/phase
	frequency	50 Hz
	frequency range	45...65 Hz
Output		1 S0-impulse output
(S0) collector open	optocoupler	40 V / 27 mA max.
	impulse duration	100 ms +/-50 %
	output impulse	1000 Imp/kWh
	connection terminal	40 / 41 / 42
(option) communication		RS485
	connection	multi-drop
	cable type	screened, wound pair
	max. cable length	1000 m
	connection	terminal screw
	isolation	3.7 kV rms for 1 min. between all meters and other units
	transmission system	asynchronous
	format type	MODBUS RTU
	transmission time	1200 to 19200 bits/s
	connection A and B	120 Ohm
	max. linked meters	32
Counter		2 counter meters for active energy HT-NT (kWh)
	2 electro-mechanical meters	
	number of digits	7 (6.1 digits)
	digit height	4 mm
	digit width	1.2 mm
	LED test	1000 Imp/kWh (red)
	LED operation	status (tariffs) (red)
(option)		
	2 meters for active/reactive energy (kWh/kvarh)	EEH2236
	2 meters for active energy (import/export) kWh	EEH2246
Current range		10 (63) A
	nominal current I_N	10 A
	max. current I_{max}	63 A
	consumption	< 0.02 W/current path
	start current	0.004 I_N
Technical data		
construction	approbations	
	active energy	EN 61036 class 1
	reactive energy	EN 61268 class 2
	housing	PA6.6 in conformity with UL 94 V-0
	dimensions (mm)	108 x 90 x 72
	weight	0.6 kg
	mounting	DIN rail acc. to DIN EN 50022
	climatic conditions	EN 61036 interior meter
ambient temperature	operation	-20 °C to +55 °C
	storage	-25 °C to +70 °C
	protection class	2
	current terminals	< 16 mm ²
	control terminals	< 2.5 mm ²
	tariff start	230 V AC
	Tariff 2 is energized when terminals 13 and 15 are under load of 230 V AC	

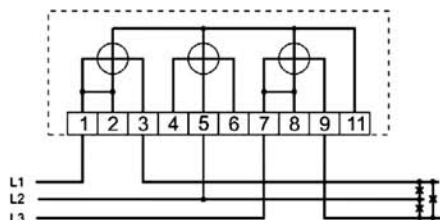


photo is similar to the original

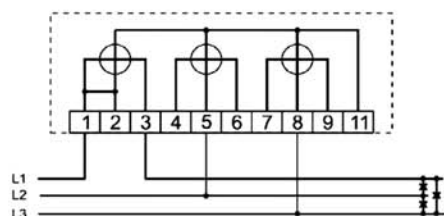
drawing



diagram



option EEH8276
equally load phases



EEH2176

Three-phase energy meter

AC energy meter for dual tariff, suitable for clip-on onto 35 mm DIN rail

Type of energy meter		EEH2176
Mains	3-wire	L-L (400 V)
	rated voltage U_N	230 V
	tolerance value	-20 %...+15 %
	consumption	< 3.0 W/phase
	frequency	50 Hz
	frequency range	45...65 Hz
Output		1 S0-impulse output
(S0) collector open	optocoupler	40 V / 27 mA max.
	impulse duration	100 ms +/-50 %
	output impulse	1000 Imp/kWh
	connection terminal	40 / 41 / 42
(option) communication	RS485	EEH2476
	connection	multi-drop
	cable type	screened, wound pair
	max. cable length	1000 m
	connection	terminal screw
	isolation	3.7 kV rms for 1 min. between all meters and other units
	transmission system	asynchronous
	format type	MODBUS RTU
	transmission time	1200 to 19200 bits/s
	connection A and B	120 Ohm
	max. linked meters	32
Counter		LCD counter meter for active energy HT-NT (kWh)
	number of digits	2 x 9 (8.1 digits)
	digit height	4.86 mm
	digit width	2.96 mm
(option)		
2 meters for active/reactive energy (kWh/kvarh)		EEH2286
2 meters for active energy (import/export) kWh		EEH2296
Current range		10 (63) A
	nominal current I_N	10 A
	max. current I_{max}	63 A
	consumption	< 0.02 W/current path
	start current	0.004 I_N
Technical data		
construction	approbations	
	active energy	EN 61036 class 1
	reactive energy	EN 61268 class 2
	housing	PA6.6 in conformity with UL 94 V-0
	dimensions (mm)	108 x 90 x 72
	weight	0.6 kg
	mounting	DIN rail acc. to DIN EN 50022
ambient temperature	climatic conditions	EN 61036 interior meter
	operation	-20 °C to +55 °C
	storage	-25 °C to +70 °C
	protection class	2
	current terminals	< 16 mm ²
	control terminals	< 2.5 mm ²
	tariff start	230 V AC
	Tariff 2 is energized when terminals 13 and 15 are under load of 230 V AC	




EEH1115


Three-phase energy transformer meter

AC energy transformer meter, suitable for clip-on onto 35 mm DIN rail

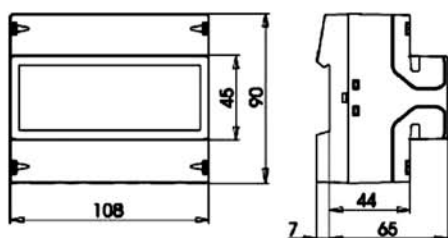
drawing



diagram

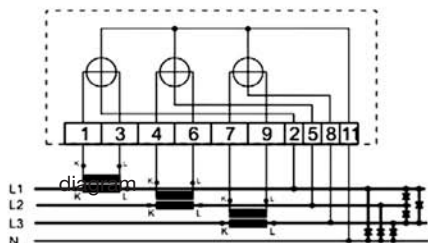


option EEH5115xxxx
equally load phases

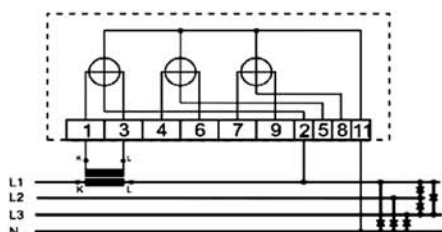



Type of energy meter		EEH1115xxxx
		xxxx declaring the primary current is absolutely necessary
Mains	4-wire	L-N (230 V)
	rated voltage U_N	230 V
	tolerance value	-20 %... +15 %
	consumption	< 3.0 VA
	frequency	50 Hz
		frequency range 45...65 Hz
Output		1 S0-impulse output
(S0) collector open	optocoupler	40 V / 27 mA max.
	impulse duration	100 ms +/-50 %
	output impulse	1000 Imp/kWh
	connection terminal	40 / 41
(option) communication	RS485	EEH1115xxxx
	connection	multi-drop
	cable type	screened, wound pair
	max. cable length	1000 m
	connection	terminal screw
	isolation	3.7 kV rms for 1 min. between all meters and other units
	transmission system	asynchronous
	format type	MODBUS RTU
	transmission time	1200 to 19200 bits/s
	connection A and B	120 Ohm
	max. linked meters	32
Counter		1 counter meter for active energy
		electro-mechanical meter
		number of digits 7 (6.1 digits)
		digit height 4 mm
		digit width 1.2 mm
		LED test 1000 Imp/kWh (red)
		LED operation status (red)
(option)	reactive energy	EEH1105xxxx
Current range		5 A
		nominal current I_N 5 A
		max. current I_{max} 6 A
		consumption < 0.02 W/current path
		start current 0.002 I_N
(option)	nominal current I_N	1 A EEH1111xxxx
Primary current		0.5 A to 2000 A
		If not stated otherwise, the standard version 5 A or 1 A will be supplied
Technical data		
construction	approbations	
	active energy	EN 61036 class 1
	reactive energy	EN 61268 class 2
	housing	PA6.6 in conformity with UL 94 V-0
	dimensions (mm)	108 x 90 x 72
ambient temperature	weight	0.6 kg
	mounting	DIN rail acc. to DIN EN 50022
	climatic conditions	EN 61036 interior meter
	operation	-20 °C to +55 °C
	storage	-25 °C to +70 °C
	protection class	2
	current terminals	< 10 mm ²
	control terminals	< 2.5 mm ²



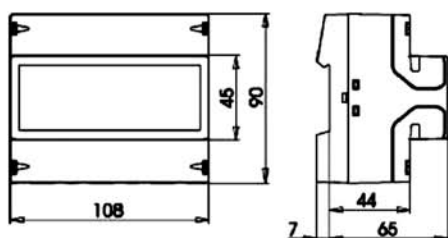drawing



diagram

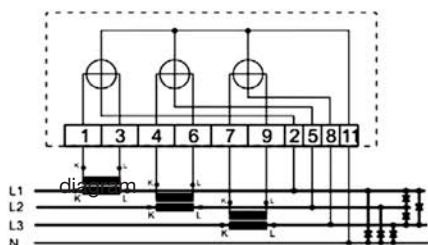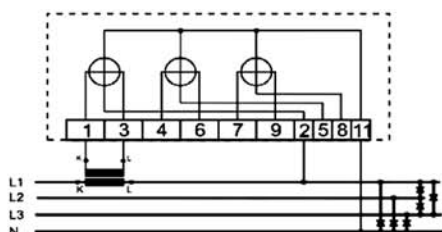option EEH5225
equally load phases

EEH1125

Three-phase energy transformer meter

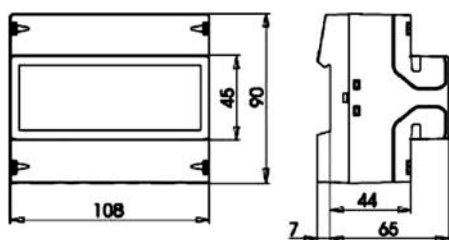
AC energy transformer meter for dual tariff, suitable for clip-on onto 35 mm DIN rail

Type of energy meter	EEH1125xxxx	
	xxxx declaring the primary current is absolutely necessary	
Mains	4-wire	L-N (230 V)
	rated voltage U_N	230 V
	tolerance value	-20 %...+15 %
	consumption	< 3.0 W/phase
	frequency	50 Hz
	frequency range	45...65 Hz
Output	1 S0-impulse output	
	optocoupler	40 V / 27 mA max.
(S0)	impulse duration	100 ms +/-50 %
collector open	output impulse	1000 Imp/kWh
	connection terminal	40 / 41 / 42
(option)	communication	
	RS485	EEH1425xxxx
	connection	multi-drop
	cable type	screened, wound pair
	max. cable length	1000 m
	connection	terminal screw
	isolation	3.7 kV rms for 1 min. between all meters and other units
	transmission system	asynchronous
	format type	MODBUS RTU
	transmission time	1200 to 19200 bits/s
	connection A and B	120 Ohm
	max. linked meters	32
Counter	2 counter meters for active energy HT-NT (kWh)	
	2 electro-mechanical meters	
	number of digits	7 (6.1 digits)
	digit height	4 mm
	digit width	1.2 mm
	LED test	1000 Imp/kWh (red)
	LED operation	status (tariffs) (red)
(option)	2 meters for active/reactive energy (kWh/kvarh)	EEH1235xxxx
	2 meters for active energy (import/export) (kWh)	EEH1245xxxx
Current range	5 A	
	nominal current I_N	5 A
	max. current I_{max}	6 A
	consumption	< 0.02 W/current path
	start current	0.002 I_N
(option)	nominal current I_N	1 A EEH1221xxxx
Primary current	0.5 A to 2000 A	
	If not stated otherwise, the standard version 5 A or 1 A will be supplied	
Technical data		
	approbations	
	active energy	EN 61036 class 1
	reactive energy	EN 61268 class 2
construction	housing	PA6.6 in conformity with UL 94 V-0
	dimensions (mm)	108 x 90 x 72
	weight	0.6 kg
	mounting	DIN rail acc. to DIN EN 50022
	climatic conditions	EN 61036 interior meter
ambient temperature	operation	-20 °C to +55 °C
	storage	-25 °C to +70 °C
	protection class	2
	current terminals	< 10 mm ²
	control terminals	< 2.5 mm ²
	tariff start	230 V AC
	Tariff 2 is energized when terminals 13 and 15 are under load of 230 V AC	

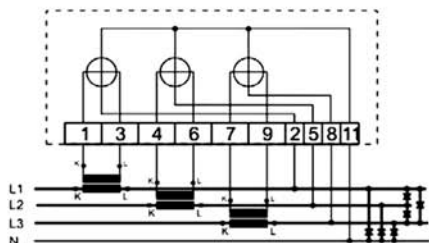


photo is similar to the original

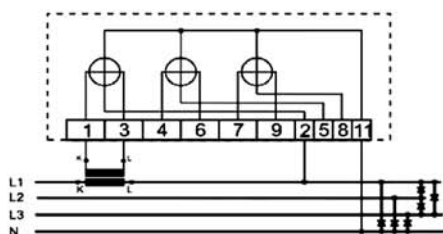
drawing



diagram



option EEH5275xxxx
equally load phases



EEH1175

Three-phase energy transformer meter

AC energy transformer meter for dual tariff, suitable for clip-on onto 35 mm DIN rail

Type of energy meter	EEH1175xxxx	
	xxxx declaring the primary current is absolutely necessary	
Mains	4-wire	L-N (230 V)
	rated voltage U_N	230 V
	tolerance value	-20 %...+15 %
	consumption	< 3.0 W
	frequency	50 Hz
	frequency range	45...65 Hz
Output	1 S0-impulse output	
	optocoupler	40 V / 27 mA max.
(S0)	impulse duration	100 ms +/-50 %
collector open	output impulse	1000 Imp/kWh
	connection terminal	40 / 41
(option)	communication	RS485
	connection	multi-drop
	cable type	screened, wound pair
	max. cable length	1000 m
	connection	terminal screw
	isolation	3.7 kV rms for 1 min. between all meters and other units
	transmission system	asynchronous
	format type	MODBUS RTU
	transmission time	1200 to 19200 bits/s
	connection A and B	120 Ohm
	max. linked meters	32

Counter	LCD counter meter for active energy HT-NT (kWh)	
	number of digits	2 x 9 (8.1-digits)
	digit height	4.86 mm
	digit width	2.96 mm
(option)	2 meters for active/reactive energy (kWh/kvarh)	EEH1285xxxx
	2 meters for active energy (import/export) (kWh)	EEH1295xxxx

Current range	5 A	
	nominal current I_N	5 A
	max. current I_{max}	6 A
	consumption	< 0.02 W/current path
	start current	0.002 I_N
(option)	nominal current I_N	1 A EEH1271xxxx


Primary current	0.5 A to 2000 A	
	If not stated otherwise, the standard version 5 A or 1 A will be supplied	

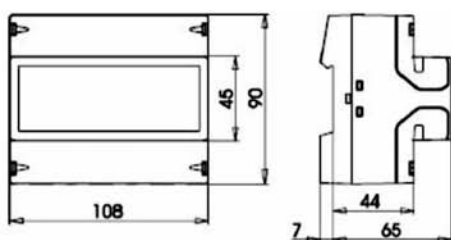Technical data			
construction	approbations		
	active energy	EN 61036	class 1
	reactive energy	EN 61268	class 2
	housing	PA6.6 in conformity with UL 94 V-0	
	dimensions (mm)	108 x 90 x 72	
	weight	0.6 kg	
	mounting	DIN rail acc. to DIN EN 50022	
ambient temperature	climatic conditions	EN 61036	interior meter
	operation	-20 °C to +55 °C	
	storage	-25 °C to +70 °C	
	protection class	2	
	current terminals	< 10 mm ²	
	control terminals	< 2.5 mm ²	
	tariff start	230 V AC	
	Tariff 2 is energized when terminals 13 and 15 are under load of 230 V AC		


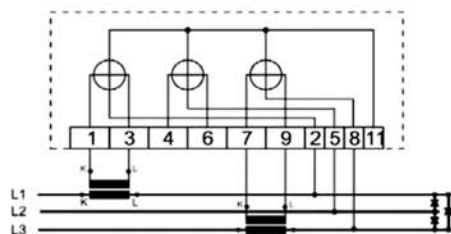


photo is similar to the original

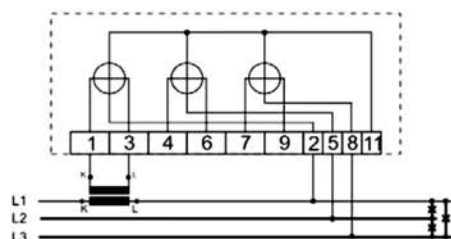drawing



diagram

option EEH8115xxxx
equally load phases

EEH2115

Three-phase energy transformer meter

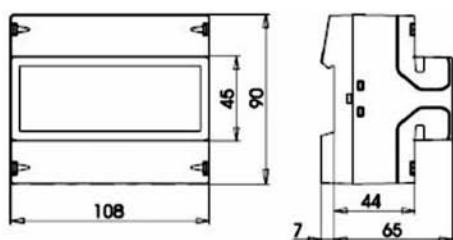
AC energy transformer meter for clip-on onto 35 mm DIN rail

Type of energy meter	EEH2115xxxx	
	xxxx declaring the primary current is absolutely necessary	
Mains	3-wire	L-L (400 V)
	rated voltage U_N	230 V
	tolerance value	-20 %...+15 %
	consumption	< 3.0 W/phase
	frequency	50 Hz
	frequency range	45...65 Hz
Output	1 S0-impulse output	
(S0)	optocoupler	40 V / 27 mA max.
collector open	impulse duration	100 ms +/-50 %
	output impulse	1000 Imp/kWh
	connection terminal	40 / 41
(option)	communication	
	RS485	EEH2315xxxx
	connection	multi-drop
	cable type	screened, wound pair
	max. cable length	1000 m
	connection	terminal screw
	isolation	3.7 kV rms for 1 min. between all meters and other units
	transmission system	asynchronous
	format type	MODBUS RTU
	transmission time	1200 to 19200 bits/s
	connection A and B	120 Ohm
	max. linked meters	32
Counter	1 counter meter for active energy (kWh)	
	electro-mechanical meter	
	number of digits	7 (6.1 digits)
	digit height	4 mm
	digit width	1.2 mm
	LED test	1000 Imp/kWh (red)
	LED operation	status (red)
(option)	reactive energy (kvarh)	EEH2105xxxx
Current range	5 A	
	nominal current I_N	5 A
	max. current I_{max}	6 A
	consumption	< 0.02 W/current path
	start current	0.002 I_N
(option)	nominal current I_N	1 A EEH2111xxxx
Primary current	0.5 A to 2000 A	
	If not stated otherwise, the standard version 5 A or 1 A will be supplied	
Technical data		
	approbations	
	active energy	EN 61036 class 1
	reactive energy	EN 61268 class 2
construction	housing	PA6.6 in conformity with UL 94 V-0
	dimensions (mm)	108 x 90 x 72
	weight	0.6 kg
	mounting	DIN rail acc. to DIN EN 50022
	climatic conditions	EN 61036 interior meter
ambient temperature	operation	-20 °C to +55 °C
	storage	-25 °C to +70 °C
	protection class	2
	current terminals	< 10 mm ²
	control terminals	< 2.5 mm ²


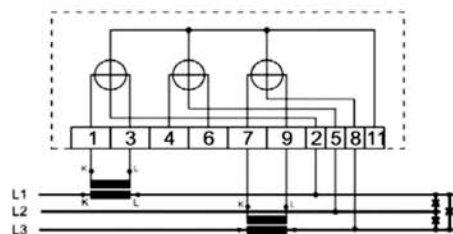


photo is similar to the original

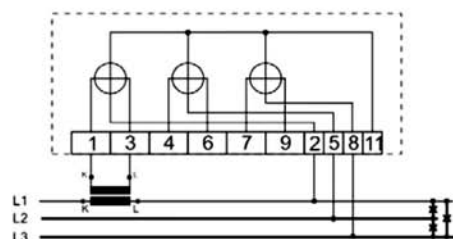drawing



diagram

option EEH8225xxxx
equally load phases

EEH2125

Three-phase energy transformer meter

AC energy transformer meter for dual tariff for clip-on onto 35 mm DIN rail


Type of energy meter	EEH2125xxxx	
	xxxx declaring the primary current is absolutely necessary	
Mains	3-wire	L-L (400 V)
	rated voltage U_N	230 V
	tolerance value	-20 %...+15 %
	consumption	< 3.0 W/phase
	frequency	50 Hz
	frequency range	45...65 Hz
Output	1 S0-impulse output	
	optocoupler	40 V / 27 mA max.
(S0)	impulse duration	100 ms +/-50 %
collector open	output impulse	1000 Imp/kWh
	connection terminal	40 / 41 / 42
(option)		
communication	RS485	EEH2425xxxx
	connection	multi-drop
	cable type	screened, wound pair
	max. cable length	1000 m
	connection	terminal screw
	isolation	3.7 kV rms for 1 min. between all meters and other units
	transmission system	asynchronous
	format type	MODBUS RTU
	transmission time	1200 to 19200 bits/s
	connection A and B	120 Ohm
	max. linked meters	32
Counter	2 counter meters for active energy HT-NT (kWh)	
	2 electro-mechanical meters	
	number of digits	7 (6.1 digits)
	digit height	4 mm
	digit width	1.2 mm
	LED test	1000 Imp/kWh (red)
	LED operation	status (tariffs) (red)
(option)		
	2 meters for active/reactive energy (kWh/kvarh)	EEH2235xxxx
	2 meters for active energy (kWh)	EEH2245xxxx
Current range	5 A	
	nominal current I_N	5 A
	max. current I_{max}	6 A
	consumption	< 0.02 W/current path
	start current	0.002 I_N
(option)	nominal current I_N	1 A EEH2221xxxx
Primary current	0.5 A to 2000 A	
	If not stated otherwise, the standard version 5 A or 1 A will be supplied.	

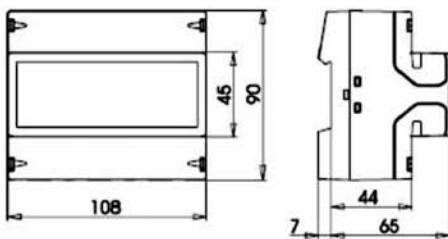Technical data		
	approbations	
	active energy	EN 61036 class 1
	reactive energy	EN 61268 class 2
construction	housing	PA6.6 in conformity with UL 94 V-0
	dimensions (mm)	108 x 90 x 72
	weight	0.6 kg
	mounting	DIN rail acc. to DIN EN 50022
	climatic conditions	EN 61036 interior meter
	operating temperature	-20 °C to +55 °C
	storage temperature	-25 °C to +70 °C
	protection class	2
	current terminals	< 10 mm ²
	control terminals	< 2.5 mm ²
	tariff start	230 V AC
	Tariff 2 is energized when terminals 13 and 15 are under load of 230 V AC	


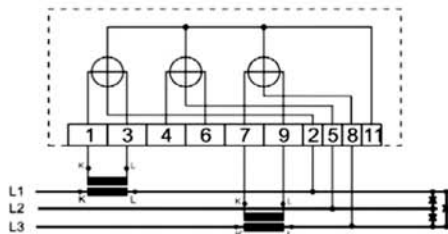


photo is similar to the original

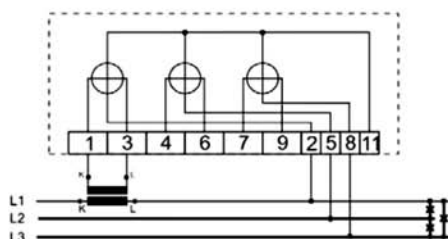drawing



diagram

option EEH8275xxxx
equally load phases

EEH2175

Three-phase energy transformer meter

AC energy transformer meter for dual tariff for clip-on onto 35 mm DIN rail

Type of energy meter	EEH2175xxxx	
	xxxx declaring the primary current is absolutely necessary	
Mains	3-wire	L-L (400 V)
	rated voltage U_N	230 V
	tolerance value	-20 %...+15 %
	consumption	< 3.0 W
	frequency	50 Hz
	frequency range	45...65 Hz
Output	1 S0-impulse output	
	optocoupler	40 V / 27 mA max.
(S0)	impulse duration	100 ms +/-50 %
collector open	output impulse	1000 Imp/kWh
	connection terminal	40 / 41
(option)	communication	
	RS485	EEH2475xxxx
	connection	multi-drop
	cable type	screened, wound pair
	max. cable length	1000 m
	connection	terminal screw
	isolation	3.7 kV rms for 1 min. between all meters and other units
	transmission system	asynchronous
	format type	MODBUS RTU
	transmission time	1200 to 19200 bits/s
	connection A and B	120 Ohm
	max. linked meters	32

Counter	LCD counter meter for active energy HT-NT (kWh)	
	number of digits	2 x 9 (8.1 digits)
	digit height	4.86 mm
	digit width	2.96 mm
(option)	2 meters for active/reactive energy (kWh/kvarh)	EEH2285xxxx
	2 meters for active energy (import/export) (kWh)	EEH2295xxxx

Current range	5 A	
	nominal current I_N	5 A
	max. current I_{max}	6 A
	consumption	< 0.02 W/current path
	start current	0.002 I_N
(option)	nominal current I_N	1 A EEH2271xxxx


Primary current	0.5 A to 2000 A	
	If not stated otherwise, the standard version 5 A or 1 A will be supplied	

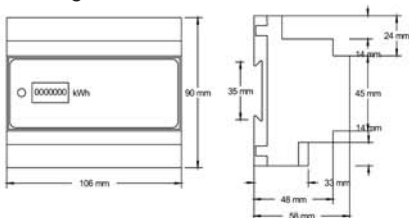Technical data		
	approbations	
	active energy	EN 61036 class 1
	reactive energy	EN 61268 class 2
construction	housing	PA6.6 in conformity with UL 94 V-0
	dimensions (mm)	108 x 90 x 72
	weight	0.6 kg
	mounting	DIN rail acc. to DIN EN 50022
	climatic conditions	EN 61036 interior meter
ambient temperature	operation	-20 °C to +55 °C
	storage	-25 °C to +70 °C
	protection class	2
	current terminals	< 10 mm ²
	control terminals	< 2.5 mm ²
	tariff start	230 V AC
	Tariff 2 is energized when terminals 13 and 15 are under load of 230 V AC	

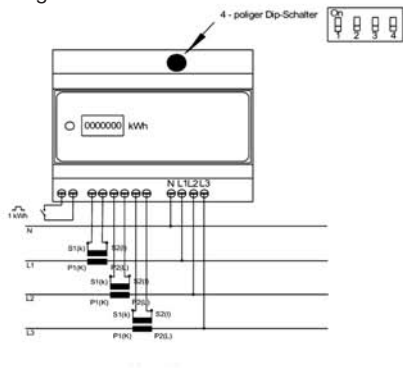


photo is similar to the original

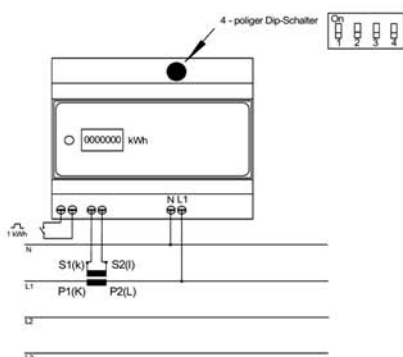
drawing



diagram



option EWS5915xxxx
equally load phases



EWS1915

Three-phase energy transformer meter

AC energy transformer meter for clip-on onto 35 mm DIN rail

Type of energy meter	EWS1915xxxx	
	xxxx declaring the primary current is absolutely necessary	
Mains	4-wire	L-N (230 V)
	rated voltage U_N	57 V, 100 V, 230 V, 400 V
	tolerance value	-20 %...+20 %
	consumption	< 3.0 W/phase
	frequency	50 Hz
	frequency range	45...65 Hz
Output	1 relay impulse output	
	relay	250 V, 6 A, 50 Hz
	impulse duration	100 ms
	max. load	1500 W
	output impulse	1 Imp/kWh
	max. impulse	4000/h
(option)	EWS1115xxxx	
	optocoupler	40 V / 27 mA max.
(S0)	impulse duration	100 ms +/-50 %
collector open	output impulse	1 Imp/Wh (30...250 A)
	output impulse	10 Imp/Wh (300...2000 A)
	impedance	100 Ohm
Counter	1 counter meter for active energy (kWh)	
	electro-mechanical meter	
	number of digits	7 (7.0 digits)
	digit height	4 mm
	digit width	1.2 mm
	LED test	8 Imp/kWh
Current range	xxxx/5 A (dip-switch setting)	
	nominal current I_N	5 A
	max. current I_{max}	6 A
	consumption	< 0.1 W/current path
	start current	0.002 I_N
(option)	nominal current I_N	xxxx/1 A EWS1911xxxx
Primary current	0.5 A to 2000 A	
	If not stated otherwise, the standard version 30/5 A or 30/1 A will be supplied	

Technical data		
	approbations	
	active energy	EN 61036 class 1
construction	polycarbonate housing	acc. to UL 94 V-0
	colour	RAL 7035
	dimensions (mm)	106 x 90 x 58
	weight	0.3 kg
	mounting	DIN rail acc. to DIN EN 50022
ambient temperature	operation	-10 °C to +60 °C
	storage	-40 °C to +70 °C
	protection class	2

setting of the 4-pole dip switch


In	1	2	3	4	In	1	2	3	4	In	1	2	3	4	In	1	2	3	4	In	1	2	3	4	In	1	2	3	4
30	○	○	○	○	50	●	○	○	○	100	○	○	○	○	250	●	●	○	○	500	○	○	○	○	1000	●	○	○	○
On	●				60	○	○	○	○	150	○	○	○	○	300	○	○	○	○	600	●	○	○	○	1500	○	○	○	○
Off	○				80	○	○	○	○	200	○	○	○	○	400	○	○	○	○	800	○	○	○	○	2000	○	○	○	○

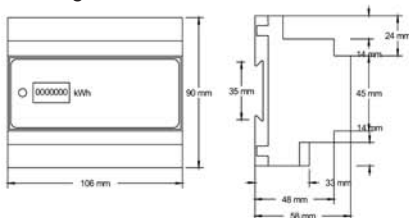deviating primary currents are programmed at works according to the details of the order.

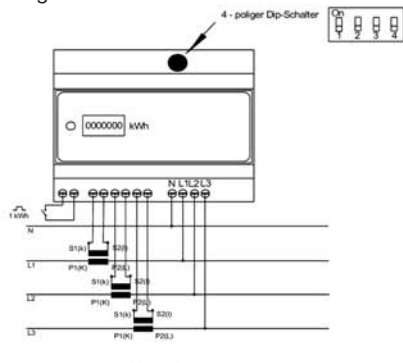


photo is similar to the original

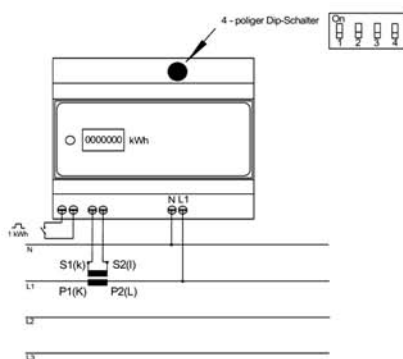
drawing



diagram



option EWS5945xxxx
equally load phases



EWS1945

Three-phase energy transformer meter

AC energy transformer meter for clip-on onto 35 mm DIN rail

Type of energy meter

EWS1945xxxx

xxxx declaring the primary current is absolutely necessary

Mains

4-wire

L-N (230 V)

rated voltage U_N

57 V, 100 V, 230 V, 400 V

tolerance value

-20 %...+20 %

consumption

< 3.0 W/phase

frequency

50 Hz

frequency range

45...65 Hz

Output

1 relay impulse output

relay

250 V, 6 A, 50 Hz

impulse duration

100 ms

max. load

1500 W

output impulse

1 Imp/kWh

max. impulse

4000/h

(option)

EWS1145xxxx

optocoupler

40 V / 27 mA max.

(S0)

impulse duration

100 ms +/- 50 %

collector open

output impulse

1 Imp/Wh (30...250 A)

output impulse

10 Imp/Wh (300...2000 A)

impedance

100 Ohm

Counter

2 counter meters for active energy (import/export) (kWh)

2 electro-mechanical meters

number of digits

7 (7.0 digits)

digit height

4 mm

digit width

1.2 mm

LED test

8 Imp/kWh

(option)

2 meters for active/reactive energy (kWh/kvarh)

EWS1935

Current range

xxxx/5 A (dip-switch setting)

nominal current I_N

5 A

max. current I_{max}

6 A

consumption

< 0.1 W/current path

start current

0.002 I_N

(option)

nominal current I_N

xxxx/1 A

EWS1941xxxx

Primary current

0.5 A to 2000 A

If not stated otherwise, the standard version 30/5 A or 30/1 A will be supplied

Technical data

	approbations	EN 61036	class 1
construction	active energy	acc. to UL 94 V-0	
	polycarbonate housing	RAL 7035	
	colour	106 x 90 x 58	
	dimensions (mm)	0.3 kg	
	weight	DIN rail acc. to DIN EN 50022	
ambient temperature	mounting	-10 °C to +60 °C	
	operation	-40 °C to +70 °C	
	storage	2	
	protection class		

setting of the 4-pole dip switch


In	1	2	3	4	In	1	2	3	4	In	1	2	3	4	In	1	2	3	4	In	1	2	3	4	In	1	2	3	4
30	○	○	○	○	50	●	○	○	○	100	○	○	○	○	250	●	●	○	○	500	○	○	○	○	1000	●	○	○	○
On	●				60	○	○	○	○	150	○	○	○	○	300	○	○	○	○	600	○	○	○	○	1500	○	○	○	○
Off	○				80	○	○	○	○	200	○	○	○	○	400	○	○	○	○	800	○	○	○	○	2000	○	○	○	○

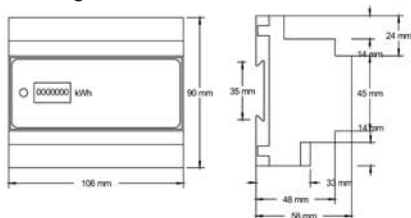deviating primary currents are programmed at works
according to the details of the order.

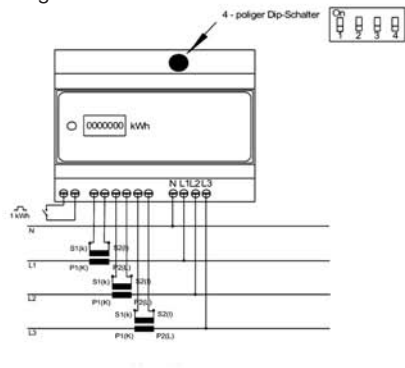


photo is similar to the original

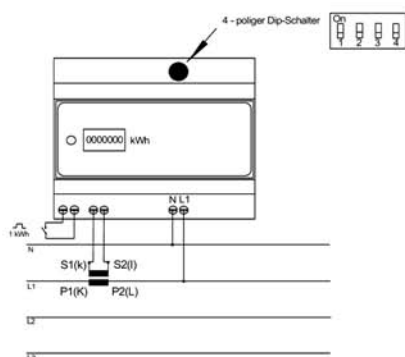
drawing



diagram



option EWS5995xxxx
equally load phases



EWS1995

Three-phase energy transformer meter

AC energy transformer meter for clip-on onto 35 mm DIN rail

Type of energy meter

EWS1995xxxx

xxxx declaring the primary current is absolutely necessary

Mains

4-wire

L-N (230 V)

rated voltage U_N

57 V, 100 V, 230 V, 400 V

tolerance value

-20 %...+20 %

consumption

< 3.0 W/phase

frequency

50 Hz

frequency range

45...65 Hz

Output

1 relay impulse output

relay

250 V, 6 A, 50 Hz

impulse duration

100 ms

max. load

1500 W

output impulse

1 Imp/kWh

max. impulse

4000/h

(option)

EWS1195xxxx

optocoupler

40 V / 27 mA max.

(S0)

impulse duration

100 ms +/-50 %

collector open

output impulse

1 Imp/Wh (30...250 A)

output impulse

10 Imp/Wh (300...2000 A)

impedance

100 Ohm

Counter

LCD counter meter for active energy import/export (kWh)

LCD counter meter

number of digits

2x9 (9.0 digits)

digit height

4.86 mm

digit width

2.96 mm

(option)

LCD counter meters for active/reactive energy (kWh/kvarh)

EEH1985

Current range

xxxx/5 A (dip-switch setting)

nominal current I_N

5 A

max. current I_{max}

6 A

consumption

< 0.1 W/current path

start current

0.002 I_N

(option)

nominal current I_N

xxxx/1 A

EWS1991xxxx

Primary current

0.5 A to 2000 A

If not stated otherwise, the standard version 30/5 A or 30/1 A will be supplied

Technical data

	approbations	
	active energy	EN 61036 class 1
construction	polycarbonate housing	acc. to UL 94 V-0
	colour	RAL 7035
	dimensions (mm)	106 x 90 x 58
	weight	0.3 kg
	mounting	DIN rail acc. to DIN EN 50022
ambient temperature	operation	-10 °C to +60 °C
	storage	-40 °C to +70 °C
	protection class	2

setting of the 4-pole dip switch

In	1	2	3	4	In	1	2	3	4	In	1	2	3	4	In	1	2	3	4	In	1	2	3	4	In	1	2	3	4
30	○	○	○	○	50	●	○	○	○	100	○	○	○	○	250	●	●	○	○	500	○	○	○	○	1000	●	○	○	○
On	●				60	○	○	○	○	150	○	○	○	○	300	○	○	○	○	600	○	○	○	○	1500	○	○	○	○
Off	○				80	○	○	○	○	200	○	○	○	○	400	○	○	○	○	800	○	○	○	○	2000	○	○	○	○

deviating primary currents are programmed at works according to the details of the order.



EWQ1915

Three-phase energy transformer meter

AC energy transformer meter for panel board installation 96 x 96 mm

Type of energy meter EWQ1915xxxx
xxxx declaring the primary current is absolutely necessary

Mains 4-wire L-N (230 V)
rated voltage U_N 57 V, 100 V, 230 V, 400 V
tolerance value -20 %...+20 %
consumption < 3.0 W/phase
frequency 50 Hz
frequency range 45...65 Hz

Output 1 relay impulse output
relay 250 V, 6 A, 50 Hz
impulse duration 100 ms
max. load 1500 W
output impulse 1 Imp/kWh
max. impulse 4000/h

Counter 1 counter meter for active energy (kWh)
electro-mechanical meter
number of digits 7 (7.0 digits)
digit height 4 mm
digit width 1.2 mm

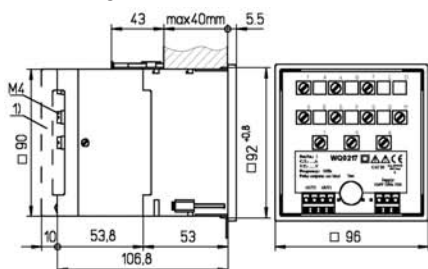
Current range xxxx/5 A
nominal current I_N 5 A
max. current I_{max} 6 A
consumption < 0.1 W/current path
start current 0.002 I_N

(option) nominal current I_N xxxx/1 A EWQ1911xxxx


Primary current 0.5 A to 2000 A
If not stated otherwise, the standard version 30/5 A or 30/1 A will be supplied

Technical data
approbations active energy EN 61036 class 1
construction polycarbonate housing acc. to UL 94 V-0
dimensions (mm) 96 x 96 x 106.8
weight 0.6 kg
mounting front panel
ambient temperature operation -10 °C to +60 °C
storage -40 °C to +70 °C
protection class 2


drawing



diagram

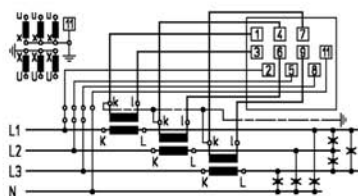

option EWQ5915xxxx
equally load phases

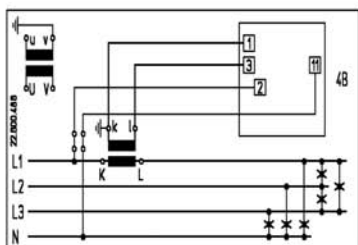



EWQ1945

Three-phase energy transformer meter

AC energy transformer meter for panel board installation 96 x 96 mm

Type of energy meter EWQ1945xxxx
xxxx declaring the primary current is absolutely necessary

Mains 4-wire L-N (230 V)
rated voltage U_N 57 V, 100 V, 230 V, 400 V
tolerance value -20 %...+20 %
consumption < 3.0 W/phase
frequency 50 Hz
frequency range 45...65 Hz

Output 1 relay impulse output
relay 250 V, 6 A, 50 Hz
impulse duration 100 ms
max. load 1500 W
output impulse 1 Imp/kWh
max. impulse 4000/h

Counter 2 counter meters for active energy import/export (kWh)
electro-mechanical meter
number of digits 7 (7.0 digits)
digit height 4 mm
digit width 1.2 mm

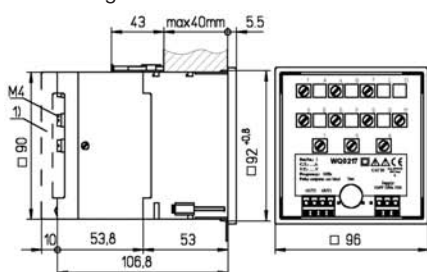
(option)
2 meters for active/reactive energy (kWh/kvarh) EWQ1935

Current range xxxx/5 A
nominal current I_N 5 A
max. current I_{max} 6 A
consumption < 0.1 W/current path
start current 0.002 I_N
(option) nominal current I_N xxxx/1 A EWQ1941xxxx


Primary current 0.5 A to 2000 A
If not stated otherwise, the standard version 5 A or 1 A will be supplied

Technical data
approbations
active energy EN 61036 class 1
construction polycarbonate housing acc. to UL 94 V-0
dimensions (mm) 96 x 96 x 106.8
weight 0.6 kg
mounting front panel
ambient temperature operation -10 °C to +60 °C
storage -40 °C to +70 °C
protection class 2


drawing



diagram

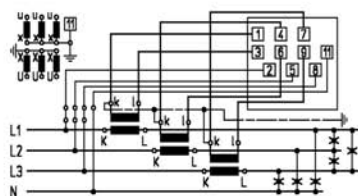


option EWQ5945xxxx
equally load phases

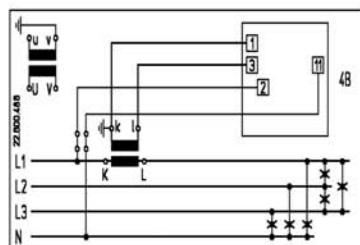





drawing

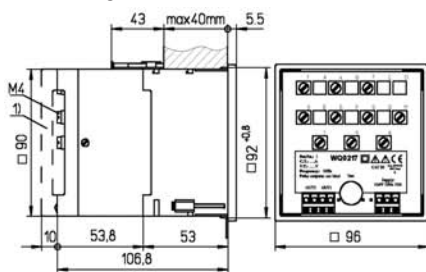

diagram

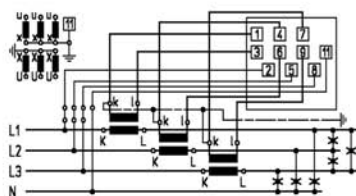

option EWQ5995xxxx
equally load phases

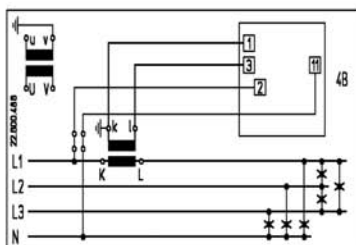

EWQ1995

Three-phase energy transformer meter

AC energy transformer meter for panel board installation 96 x 96 mm

Type of energy meter		EWQ1995xxxx
		xxxx declaring the primary current is absolutely necessary
Mains		4-wire L-N (230 V)
		rated voltage U_N 57 V, 100 V, 230 V, 400 V
		tolerance value -20 %...+20 %
		consumption < 3.0 W/phase
		frequency 50 Hz
		frequency range 45...65 Hz
Output		1 relay impulse output
		relay 250 V, 6A, 50Hz
		impulse duration 100 ms
		max. load 1500 W
		output impulse 1 Imp/kWh
		max. impulse 4000/h
Counter		LCD counter meter for active energy import/export (kWh)
		LCD counter
		number of digits 2x9 (9.0 digits)
		digit height 4.86 mm
		digit width 2.96 mm
(option)		LCD counter for active/reactive energy (kWh/kvarh) EWQ1985
Current range		xxxx/5 A
		nominal current I_N 5 A
		max. current I_{max} 6 A
		consumption < 0.1 W/current path
		start current 0.002 I_N
(option)		nominal current I_N xxxx/1 A EWQ1991xxxx
Primary current		0.5 A to 2000 A
		If not stated otherwise, the standard version 5 A or 1 A will be supplied
Technical data		
		approbations
construction	active energy	EN 61036 class 1
	polycarbonate housing	acc. to UL 94 V-0
	dimensions (mm)	96 x 96 x 106.8
ambient temperature	weight	0.6 kg
	mounting	front panel
	operation	-10 °C to +60 °C
	storage	-40 °C to +70 °C
		protection class 2



Electro-mechanical energy meters for industrial applications

Single-phase energy meter, direct measuring

EMZ60110040	2-wire	220 V	kWh	10 (40) A
EMZ60110060	2-wire	220 V	kWh	10 (60) A

Three-phase energy meter, direct measuring

EMZ10110040	4-wire	3x220/380 V		kWh	10 (40) A
EMZ10210040	4-wire	3x220/380 V	2 tariffs, HT-NT	kWh	10 (40) A
EMZ10115060	4-wire	3x220/380 V		kWh	15 (60) A
EMZ10215060	4-wire	3x220/380 V	2 tariffs, HT-NT	kWh	15 (60) A
EMZ10110060	4-wire	3x220/380 V		kWh	10 (60) A
EMZ10210060	4-wire	3x220/380 V	2 tariffs, HT-NT	kWh	10 (60) A
EMZ10120100	4-wire	3x220/380 V		kWh	20 (100) A
EMZ10125100	4-wire	3x220/380 V		kWh	25 (100) A

Three-phase energy transformer meter

EMZ1015	4-wire	3x220/380 V		kWh	5 A
EMZ1025	4-wire	3x220/380 V	2 tariffs, HT-NT	kWh	5 A





Electronic energy meter for tariff applications

Single phase energy meter, direct measuring, clip-on onto 35 mm DIN rail

					page
EAA7112	2-wire	1 S0-impulse output	kWh	5 (32) A	.320
EMU7114	2-wire	1 S0-impulse output	kWh	5 (63) A	.321
EMU7124	2-wire	1 S0-impulse output	2 tariffs kWh	5 (63) A	.322

Three-phase energy meter, direct measuring, clip-on onto 35 mm DIN rail

EEH4114	4-wire	1 S0-impulse output	kWh / kvarh	10 (63) A	.323
EEH4124	4-wire	1 S0-impulse output	2 tariffs +/- kWh / kvarh	10 (63) A	.324
EEH4174	4-wire	1 S0-impulse output	LCD, 2 tariffs +/- kWh / kvarh	10 (63) A	.325
EEH3116	3-wire	1 S0-impulse output	kWh / kvarh	10 (63) A	.326
EEH3126	3-wire	1 S0-impulse output	2 tariffs +/- kWh / kvarh	10 (63) A	.327
EEH3176	3-wire	1 S0-impulse output	LCD, 2 tariffs +/- kWh / kvarh	10 (63) A	.328
EMU4114	4-wire	1 S0-impulse output	kWh	5 (63) A	.329
EMU4124	4-wire	1 S0-impulse output	2 tariffs, HT-NT kWh	5 (63) A	.330
EMU4154	4-wire	1 S0-impulse output	LCD kWh	5 (63) A	.331
EMU4174	4-wire	1 S0-impulse output	LCD, 2 tariffs, HT-NT kWh	5 (63) A	.332
EMU4754	4-wire	1 S0-impulse output	LCD, M-BUS kWh	5 (63) A	.333
EMU4774	4-wire	1 S0-impulse output	LCD, M-BUS, 2 tariffs kWh	5 (63) A	.334
EMU4164	4-wire	1 S0-impulse output	LCD, 2 tariffs, HT-NT kWh	5 (63) A	.335

Three-phase energy transformer meter, clip-on onto 35 mm DIN rail

EEH4115	4-wire	1 S0-impulse output	kWh / kvarh	5 A, 1 A	.336
EEH4125	4-wire	1 S0-impulse output	2 tariffs +/- kWh / kvarh	5 A, 1 A	.337
EEH4175	4-wire	1 S0-impulse output	LCD, 2 tariffs +/- kWh / kvarh	5 A, 1 A	.338
EEH3115	3-wire	1 S0-impulse output	kWh / kvarh	5 A, 1 A	.339
EEH3125	3-wire	1 S0-impulse output	2 tariffs +/- kWh / kvarh	5 A, 1 A	.340
EEH3175	3-wire	1 S0-impulse output	LCD, 2 tariffs +/- kWh / kvarh	5 A, 1 A	.341
EMU4115	4-wire	1 S0-impulse output	kWh	5 A	.342
EMU4125	4-wire	1 S0-impulse output	2 tariffs, HT-NT kWh	5 A	.343
EMU4155	4-wire	1 S0-impulse output	LCD kWh	5 A	.344
EMU4175	4-wire	1 S0-impulse output	LCD, 2 tariffs, HT-NT kWh	5 A	.345
EMU4755	4-wire	1 S0-impulse output	LCD, M-BUS kWh	5 A	.346
EMU4775	4-wire	1 S0-impulse output	LCD, M-BUS, 2 tariffs kWh	5 A	.347
EMU4165	4-wire	1 S0-impulse output	LCD, 2 tariffs, HT-NT kWh	5 A	.348




EAA7112

Single-phase energy meter


Calibrated AC energy meter for clip-on onto 35 mm DIN rail



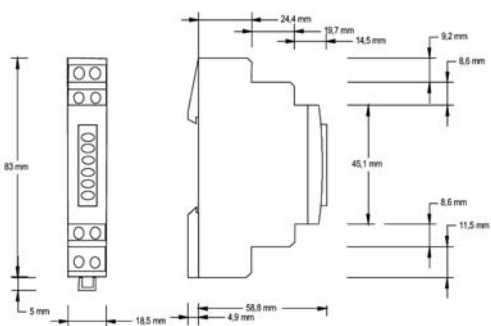
drawing



connection diagram

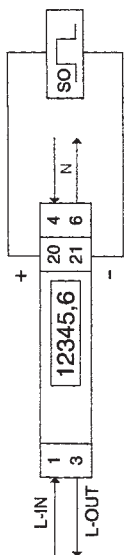

Type of energy meter		AAD1D5F
Mains	2-wire	L-N (230 V)
	rated voltage U_N	230 V AC, 50 Hz
	tolerance value:	-20 %...+15 %
	frequency	50 Hz
Output	1 S0-impulse output	
(S0+/S0-) collector open	optocoupler	5-30 V DC / 20 mA max.
	impulse duration	50 ms
	output impulse	1000 Imp/kWh
	impedance	100 Ohm
	connection terminal	S0-, S0+
Counter	1 counter meter for active energy (kWh)	
	electro-mechanical meter	
	number of digits:	7 (6.1 digits)
	digit height:	4 mm
	digit width:	1.2 mm
	function control	red flashing LED 2.000 Imp/kWh
Current range		5 (32) A
	nominal current I_N	5 A
	max. current (I_{max})	32 A
	start current	0.004 I_N
	energy consumption	0.4 W/current path
Technical data		
	approbations	PTB approval
	accuracy class	class 1, DIN EN 61036, active energy
	ambient temperature	-10 °C to +45 °C
	protection class	IP 50
	connections	IP 20
		main connections 1...6 mm ²
		SO-impulse output max. 2.5 mm ²
	screw terminals	main connections M4, S0 M3
		Pozidrive Phillips no. 1, flat no. 1
	dimensions (mm)	17.5 x 85 x 59
	weight	0.08 kg
	isolation characteristics	4 kV / 50 Hz, test acc. to VDE 0435
		surge voltage acc. to IEC 255-4:
		6 kV 1.2/50 ms
		protection class 2
	EMV/interference stability	4 kV 1.2/50 ms
		surge voltage stability
		acc. to IEC 1000-4-5 at input
		1 kV 1.2/50 ms
		surge voltage stability
		acc. to IEC 1000-4-5 at output
		SO
		burst acc. to IEC 1000-4-4
		level 4 (4 kV)
		electro static discharge (ESD)
		acc. to IEC 1000-4-2
		level 3 (8 kV)

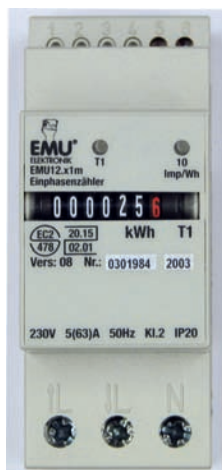


EMU7114

Single-phase energy meter

Calibrated AC energy meter for clip-on onto 35 mm DIN rail

Type of energy meter		EMU12.x1 m
Mains	2-wire	L-N (230 V)
	rated voltage U_N	230 V
	tolerance value	-20 %...+20 %
	frequency	50 Hz
	frequency range	45–65 Hz
Output	1 S0-impulse output	
(S0+/S0-) collector open	optocoupler	5-30 V DC / 20 mA max.
	impulse duration	125 ms
	output impulse	10 Imp/kWh
	impedance	0.5–1.5 kOhm
	connection terminal	5 / 6
Counter	1 counter meter for active energy (kWh)	
	1 electro-mechanical meter	
	number of digits	7 (6.1 digits)
	digit height	4 mm
	digit width	1.2 mm
	operating display	green LED
	LED test	10 Imp/Wh (invisible)
Current range		5 (63) A
	nominal current I_N	5 A
	max. current I_{max}	63 A
	consumption	0.8 W/current path
	start current	0.005 I_N
Technical data		
	approbations	PTB approval
	accuracy class	class 2, DIN EN 61036, active energy
	ambient temperature	-10 °C to +50 °C
	protection class	IP 50
	connections	IP 20
	connections	
	main connection	1...10 mm ²
	S0-impulse output	max. 2.5 mm ²
	dimensions (mm)	36 x 90 x 71
	weight	0.15 kg

drawing



diagram

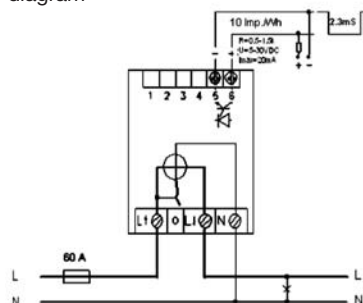







photo is similar to the original

drawing



diagram



EMU7124

Single-phase energy meter

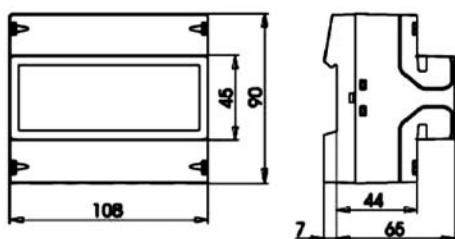
Calibrated AC energy meter for clip-on onto 35 mm DIN rail

Type of energy meter		EMU12.x2m
Mains	2-wire	L-N (230 V)
	rated voltage U_N	230 V
	tolerance value	-20 %...+20 %
	frequency	50 Hz
	frequency range	45-65 Hz
Output	1 SO-impulse output	
	optocoupler	5-30 V DC / 20 mA max.
(S0+/S0-)	impulse duration	125 ms
collector open	output impulse	10 Imp/kWh
	impedance	0.5 – 1.5 kOhm
	connection terminal	5 / 6
Counter	2 counter meters for active energy HT-NT (kWh)	
	2 electro-mechanical meters	
	number of digits	7 (6.1 digits)
	digit height	4 mm
	digit width	1.2 mm
	operating display	green LED
	LED test	10 Imp/Wh (invisible)
Current range	5 (63) A	
	nominal current I_N	5 A
	max. current I_{max}	63 A
	consumption	0.8 W/current path
	start current	0.005 I_N
Technical data		
	approbations	PTB approval
	accuracy class	class 2, DIN EN 61036, active energy
	ambient temperature	-10 °C to +50 °C
	protection class	IP 50
	connections	IP 20
	connections	
	main connection	1 ... 10 mm ²
	SO-impulse output	max. 2.5 mm ²
	dimensions (mm)	36 x 90 x 71
	weight	0.17 kg
	tariff start	230 V AC
	Tariff 2 is energized when terminals 1 and 3 are under load of 230 V AC	

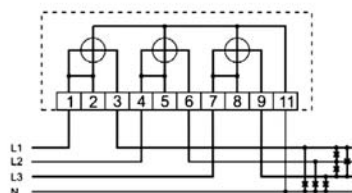


photo is similar to the original

drawing



diagram



EEH4114

Three-phase energy meter

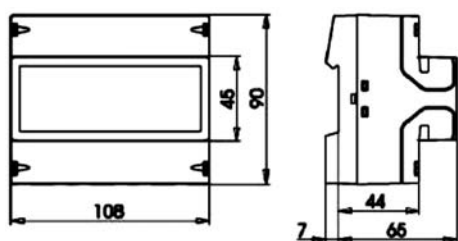
Calibrated AC energy meter for clip-on onto 35 mm DIN rail

Type of energy meter		EEH4114
Mains	4-wire	L-N (230 V)
	rated voltage U_N	230 V
	tolerance value	-20 %...+15 %
	consumption	< 3.0 W/phase
	frequency	50 Hz
	frequency range	45 ... 65 Hz
Output		1 S0-impulse output
(S0)	optocoupler	40 V / 27 mA max.
	impulse duration	100 ms +/-50 %
	output impulse	1000 Imp/kWh
	connection terminal	40 / 41
(option)		communication
	RS485	EEH4314
	connection	multi-drop
	cable type	screened, wound pair
	max. cable length	1000 m
	connection	terminal screw
	isolation	3.7 kV rms for 1 min. between all meters and other units
	transmission system	asynchronous
	format type	MODBUS RTU
	transmission time	1200 to 19200 bits/s
	connection A and B	120 Ohm
	max. linked meters	32
Counter		1 counter meter for active energy (kWh)
	electro-mechanical meter	
	number of digits	7 (6.1 digits)
	digit height	4 mm
	digit width	1.2 mm
	LED test	1000 Imp/kWh (red)
	LED operation	status (red)
(option)		1 meter for reactive energy (kvarh)
		EEH4104
Current range		5 (63) A
	nominal current I_N	5 A
	max. current I_{max}	63 A
	consumption	< 0.02 W/current path
	start current	0.004 I_N
Technical data		
construction	approbations	PTB approval applied for
	active energy	EN 61036 class 1
	reactive energy	EN 61268 class 2
	housing	PA6.6 in conformity with UL 94 V-0
	dimensions (mm)	108 x 90 x 72
	weight	0.6 kg
	mounting	DIN rail acc. to DIN EN 50022
	climatic conditions	EN 61036 interior meter
ambient temperature	operation	-20 °C to +55 °C
	storage	-25 °C to +70 °C
	protection class	2
	current terminals	< 16 mm ²
	control terminals	< 2.5 mm ²

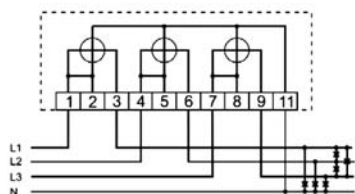


photo is similar to the original

drawing



diagram



EEH4124

Three-phase energy meter

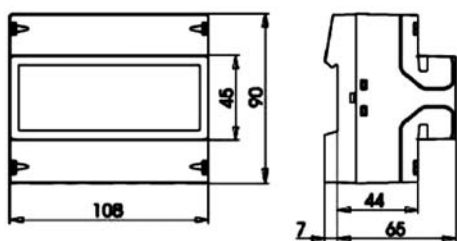
Calibrated AC energy meter for dual tariff for clip-on onto 35 mm DIN rail

Type of energy meter		EEH4124
Mains	4-wire	L-N (230 V)
	rated voltage U_N	230 V
	tolerance value	-20 %...+15 %
	consumption	< 3.0 VA
	frequency	50 Hz
	frequency range	45...65 Hz
Output	1 S0-impulse output	
	optocoupler	40 V / 27 mA max.
	impulse duration	100 ms +/-50 %
	output impulse	1000 Imp/kWh
	connection terminal	40 / 41 / 42
(S0) collector open		
(option) communication	RS485	EEH4424
	connection	multi-drop
	cable type	screened, wound pair
	max. cable length	1000 m
	connection	terminal screw
	isolation	3.7 kV rms for 1 min. between all meters and other units
	transmission system	asynchronous
	format type	MODBUS RTU
	transmission time	1200 to 19200 bits/s
	connection A and B	120 Ohm
	max. linked meters	32
Counter	2 counter meters for active energy HT-NT	
	2 electro-mechanical meters	
	number of digits	7 (6.1 digits)
	digit height	4 mm
	digit width	1.2 mm
	LED test	1000 Imp/kWh (red)
	LED operation	status (tariffs) (red)
	(option)	
	2 meters for active/reactive energy (kvarh)	EEH4234
	2 meters for active energy (import/export)	EEH4244
Current range		5 (63) A
	nominal current I_N	5 A
	max. current I_{max}	63 A
	consumption	< 0.02 VA/current path
	start current	0.004 I_N
Technical data		
construction	approbations	PTB approval applied for
	active energy	EN 61036 class 1
	reactive energy	EN 61268 class 2
	housing	PA6.6 in conformity with UL 94 V-0
	dimensions (mm)	108 x 90 x 72
ambient temperature	weight	0.6 kg
	mounting	DIN rail acc. to DIN EN 50022
	climatic conditions	EN 61036 interior meter
	operation	-20 °C to +55 °C
	storage	-25 °C to +70 °C
	protection class	2
	current terminals	< 16 mm ²
	control terminals	< 2.5 mm ²
	tariff start	230 V AC
	Tariff 2 is energized when terminals 13 and 15 are under load of 230 V AC	

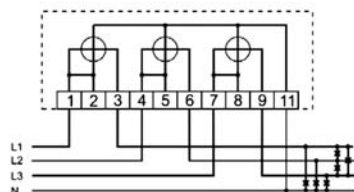


photo is similar to the original

drawing



diagram



EEH4174

Three-phase energy meter

Calibrated AC energy meter for dual tariff for clip-on onto 35 mm DIN rail

Type of energy meter		EEH4174
Mains	4-wire	L-N (230 V)
	rated voltage U_N	230 V
	tolerance value	-20 %...+15 %
	consumption	< 3.0 W/phase
	frequency	50 Hz
	frequency range	45...65 Hz
Output		1 S0-impulse output
(S0) collector open	optocoupler	40 V / 27 mA max.
	impulse duration	100 ms +/-50 %
	output impulse	1000 Imp/kWh
	connection terminal	40 / 41
(option) communication		RS485
	connection	EEH4474
	cable type	multi-drop
	max. cable length	screened, wound pair
	connection	1000 m
	isolation	terminal screw
		3.7 kV rms for 1 min. between
		all meters and other units
	transmission system	asynchronous
	format type	MODBUS RTU
	transmission time	1200 to 19200 bits/s
	connection A and B	120 Ohm
	max. linked meters	32
Counter		LCD counter meter for active energy HT-NT (kWh)
	number of digits	2 x 9 (8.1 digits)
	digit height	4.86 mm
	digit width	2.96 mm
(option)		
2 meters for active/reactive energy (kvarh)		EEH4284
	2 meters for active energy (import/export)	EEH4294
Current range		5 (63) A
	nominal current I_N	5 A
	max. current I_{max}	63 A
	consumption	< 0.02 W/current path
	start current	0.004 I_N
Technical data		
construction	approbations	PTB approval applied for
	active energy	EN 61036 class 1
	reactive energy	EN 61268 class 2
	housing	PA6.6 in conformity with UL 94 V-0
	dimensions (mm)	108 x 90 x 72
	weight	0.6 kg
	mounting	DIN rail acc. to DIN EN 50022
	climatic conditions	EN 61036 interior meter
ambient temperature	operation	-20 °C to +55 °C
	storage	-25 °C to +70 °C
	protection class	2
	current terminals	< 16 mm ²
	control terminals	< 2.5 mm ²
	tariff start	230 V AC
		Tariff 2 is energized when terminals 13 and 15 are under load of 230 V AC



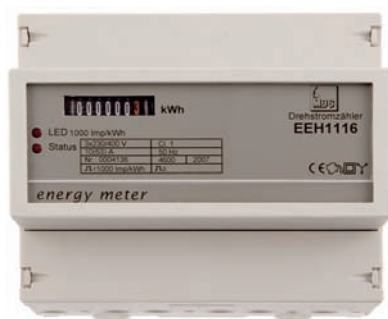


photo is similar to the original

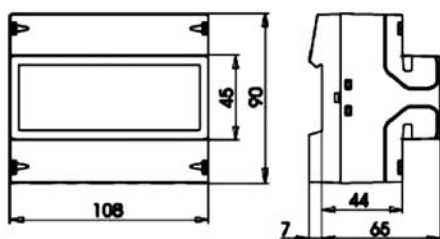drawing



diagram

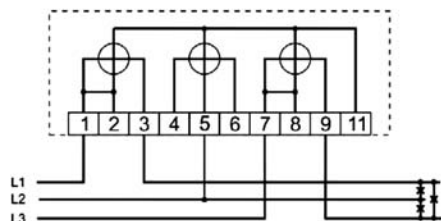

EEH3116

Three-phase energy meter

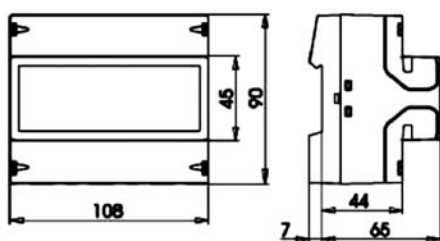
Calibrated AC energy meter for clip-on onto 35 mm DIN rail

Type of energy meter		EEH3116
Mains	3-wire	L-L (400 V)
	rated voltage U_N	230 V
	tolerance value	-20 %...+15 %
	consumption	< 3.0 W/phase
	frequency	50 Hz
	frequency range	45 ... 65 Hz
Output	1 S0-impulse output	
	optocoupler	40 V / 27 mA max.
(S0) collector open	impulse duration	100 ms +/-50 %
	output impulse	1000 Imp/kWh
	connection terminal	40 / 41
(option) communication	RS485	EEH3316
	connection	multi-drop
	cable type	screened, wound pair
	max. cable length	1000 m
	connection	terminal screw
	isolation	3.7 kV rms for 1 min. between all meters and other units
	transmission system	asynchronous
	format type	MODBUS RTU
	transmission time	1200 to 19200 bits/s
	connection A and B	120 Ohm
	max. linked meters	32
Counter	1 counter meter for active energy (kWh)	
	electro-mechanical meter	
	number of digits	7 (6.1 digits)
	digit height	4 mm
	digit width	1.2 mm
	LED test	1000 Imp/kWh (red)
	LED operation	status (red)
(option)	1 meter for reactive energy (kvarh)	EEH3106
Current range		10 (63) A
	nominal current I_N	10 A
	max. current I_{max}	63 A
	consumption	< 0.02 W/current path
	start current	0.004 I_N
Technical data		
construction	approbations	PTB approval applied for
	active energy	EN 61036 class 1
	reactive energy	EN 61268 class 2
	housing	PA6.6 in conformity with UL 94 V-0
	dimensions (mm)	108 x 90 x 72
ambient temperature	weight	0.6 kg
	mounting	DIN rail acc. to DIN EN 50022
	climatic conditions	EN 61036 interior meter
	operation	-20 °C to +55 °C
	storage	-25 °C to +70 °C
	protection class	2
	current terminals	< 16 mm ²
	control terminals	< 2.5 mm ²

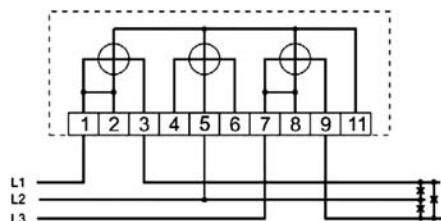


photo is similar to the original

drawing



diagram



EEH3126

Three-phase energy meter

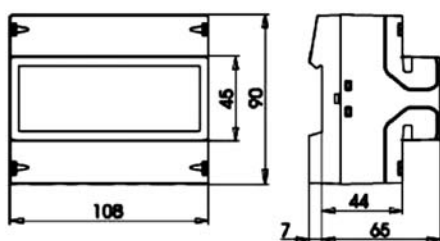
Calibrated AC energy meter for dual tariff for clip-on onto 35 mm DIN rail

Type of energy meter		EEH3126
Mains	3-wire	L-L (400)V
	rated voltage U_N	230 V
	tolerance value	-20 %...+15 %
	consumption	< 3.0 VA
	frequency	50 Hz
	frequency range	45 ... 65 Hz
Output		1 S0-impulse output
(S0) collector open	optocoupler	40 V / 27 mA max.
	impulse duration	100 ms +/-50 %
	output impulse	1000 Imp/kWh
	connection terminal	40 / 41 / 42
(option) communication		RS485
	connection	EEH3426
	cable type	multi-drop
	max. cable length	screened, wound pair
	connection	1000 m
	isolation	terminal screw
		3.7 kV rms for 1 min. between
		all meters and other units
	transmission system	asynchronous
	format type	MODBUS RTU
	transmission time	1200 to 19200 bits/s
	connection A and B	120 Ohm
	max. linked meters	32
Counter		2 counter meters for active energy HT-NT (kWh)
	2 electro-mechanical meters	
	number of digits	7 (6.1 digits)
	digit height	4 mm
	digit width	1.2 mm
	LED test	1000 Imp/kWh (red)
	LED operation	status (tariffs) (red)
(option)		
	2 meters for active/reactive energy (kvarh)	EEH3236
	2 meters for active energy (import/export)	EEH3246
Current range		10 (63) A
	nominal current I_N	10 A
	max. current I_{max}	63 A
	consumption	< 0.02 VA/current path
	start current	0.004 I_N
Technical data		
construction	approbations	PTB approval applied for
	active energy	EN 61036 class 1
	reactive energy	EN 61268 class 2
	housing	PA6.6 in conformity with UL 94 V-0
	dimensions (mm)	108 x 90 x 72
	weight	0.6 kg
ambient temperature	mounting	DIN rail acc. to DIN EN 50022
	climatic conditions	EN 61036 interior meter
	operation	-20 °C to +55 °C
	storage	-25 °C to +70 °C
	protection class 2	
	current terminals	< 16 mm ²
	control terminals	< 2.5 mm ²
	tariff start	230 V AC
	Tariff 2 is energized when terminals 13 and 15 are under load of 230 V AC	

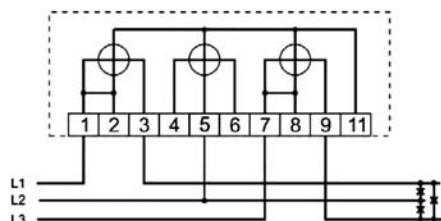


photo is similar to the original

drawing



diagram



EEH3176

Three-phase energy meter

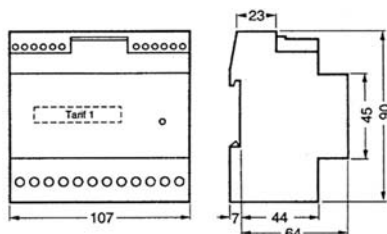
Calibrated AC energy meter for dual tariff for clip-on onto 35 mm DIN rail

Type of energy meter		EEH3176
Mains	3-wire	L-L (400 V)
	rated voltage U_N	230 V
	tolerance value	-20 %...+15 %
	consumption	< 3.0 W/phase
	frequency	50 Hz
	frequency range	45 ... 65 Hz
Output	1 S0-impulse output	
	optocoupler	40 V / 27 mA max.
	impulse duration	100 ms +/-50 %
	output impulse	1000 Imp/kWh
(S0) collector open	connection terminal	40 / 41
(option) communication	RS485	EEH3476
	connection	multi-drop
	cable type	screened, wound pair
	max. cable length	1000 m
	connection	terminal screw
	isolation	3.7 kV rms for 1 min. between all meters and other units
	transmission system	asynchronous
	format type	MODBUS RTU
	transmission time	1200 to 19200 bits/s
	connection A and B	120 Ohm
	max. linked meters	32
Counter	LCD counter meter for active energy HT-NT (kWh)	
	number of digits	2 x 9 (8.1 digits)
	digit height	4.86 mm
	digit width	2.96 mm
(option)	2 counter meters for active/reactive energy (kWh/kvarh)	EEH3286
	2 counter meters for reactive energy (import/export) (kWh)	EEH3296
Current range		10 (63) A
	nominal current I_N	10 A
	max. current I_{max}	63 A
	consumption	< 0.02 W/current path
	start current	0.004 I_N
Technical data		
construction	approbations	PTB approval applied for
	active energy	EN 61036 class 1
	reactive energy	EN 61268 class 2
	housing	PA6.6 in conformity with UL 94 V-0
	dimensions (mm)	108 x 90 x 72
	weight	0.6 kg
	mounting	DIN rail acc. to DIN EN 50022
ambient temperature	climatic conditions	EN 61036 interior meter
	operation	-20 °C to +55 °C
	storage	-25 °C to +70 °C
	protection class	2
	current terminals	< 16 mm ²
	control terminals	< 2.5 mm ²
	tariff start	230 V AC
	Tariff 2 is energized when terminals 13 and 15 are under load of 230 V AC	




photo is similar to the original

drawing



diagram



EMU4114

Three-phase energy meter

Calibrated AC energy meter for clip-on onto 35 mm DIN rail

Type of energy meter		EEH4114
Mains	4-wire	L-N (230 V)
	rated voltage U_N	230 V
	tolerance value	-20 %...+20 %
	consumption	0.8 W/current path
	frequency	50 Hz
	frequency range	45...65 Hz
Output	1 S0-impulse output	
	optocoupler	5-30 V DC / 20 mA max.
	impulse duration	approx. 125 ms
	output impulse	10 Imp/kWh
	impedance	0.5 – 1.5 kOhm
(S0) collector open	connection terminal	11 / 12
Counter	1 counter meter for active energy (kWh)	
	1 electro-mechanical meter	
	number of digits	7 (6.1 digits)
	digit height	5 mm
	digit width	3 mm
	LED test	10 Imp/Wh (not visible)
	LED operation	status (green)
Current range		5 (63) A
	nominal current I_N	5 A
	max. current I_{max}	63 A
	consumption	0.8 W/current path
	start current	0.005 I_N
Technical data		
	approbations	PTB approval
	accuracy class	class 2, EN 61036, active energy
	dimensions (mm)	107 x 90 x 71
	weight	0.35 kg
	mounting	DIN rail acc. to DIN EN 50022-35
	climatic conditions	EN 61036 interior meter
ambient temperature	operation	-10 °C to +50 °C
	storage	-40 °C to +70 °C
	protection class	2
	current terminals	7.6 x 8.3 mm
	control terminals	2.5 x 3 mm



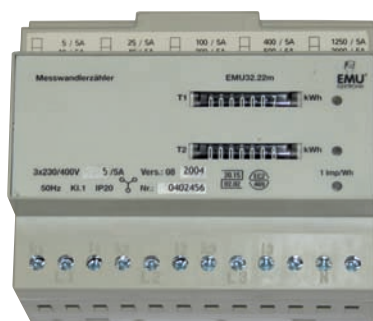


photo is similar to the original

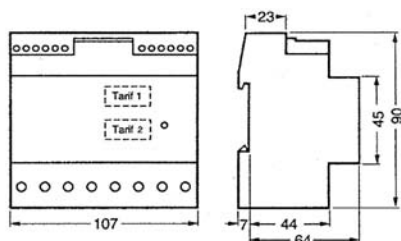drawing



diagram

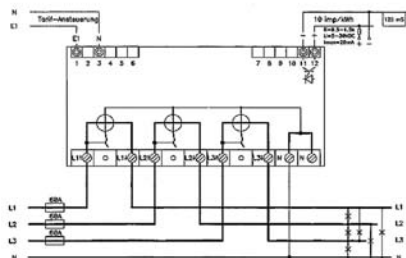

EMU4124

Three-phase energy meter

Calibrated AC energy meter for dual tariff for clip-on onto 35 mm DIN rail

Type of energy meter		EMU4124
Mains	4-wire	L-N (230 V)
	rated voltage U_N	230 V
	tolerance value	-20 %...+20 %
	consumption	0.8 W/phase
	frequency	50 Hz
	frequency range	45 ... 65 Hz
Output	1 S0-impulse output	
	optocoupler	5-30 V DC / 20 mA max.
	impulse duration	approx. 125 ms
	output impulse	10 Imp/kWh
	impedance	0.5 – 1.5 kOhm
(S0) collector open	connection terminal	11 / 12
Counter	2 counter meters for active energy HT-NT (kWh)	
	2 electro-mechanical meters	
	number of digits	7 (6.1 digits)
	digit height	4 mm
	digit width	1.2 mm
	LED test	10 Imp/Wh (invisible)
	LED operation	status (tariffs) (green)
Current range	5 (63) A	
	nominal current I_N	5 A
	max. current I_{max}	63 A
	consumption	0.8 W/current path
	start current	0.005 I_N
Technical data	approbations	PTB approval
	accuracy class	class 2, EN 61036, active energy
	dimensions (mm)	107 x 90 x 71
	weight	0.40 kg
	mounting	DIN rail acc. to DIN EN 50022-35
	climatic conditions	EN 61036 interior meter
	operation	-10 °C to +50 °C
	storage	-40 °C to +70 °C
	protection class	2
	current terminals	7.6 x 8.3 mm
	control terminals	2.5 x 3 mm
	tariff control	230 V AC
	Tariff 2 is energized when terminals 1 and 3 are under load of 230 V AC	



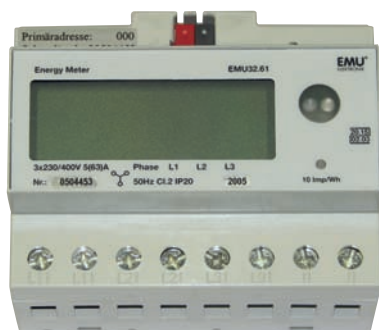


photo is similar to the original

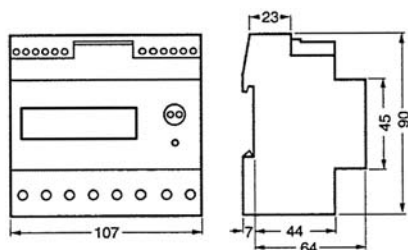drawing



diagram

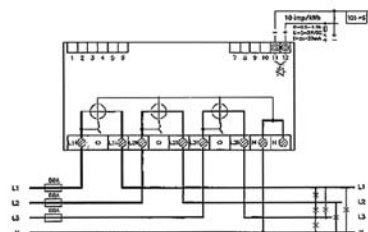

EMU4154

Three-phase energy meter

Calibrated AC energy meter for clip-on onto 35 mm DIN rail


Type of energy meter		EMU4154	
Mains	4-wire	L-N (230 V)	
	rated voltage U_N	230 V	
	tolerance value	-20 %...+20 %	
	consumption	0.8 W/phase	
	frequency	50 Hz	
	frequency range	45 ... 65 Hz	
Output	1 S0-impulse output		
(S0) collector open	optocoupler	5–30 V DC / 20 mA max.	
	impulse duration	approx. 125 ms	
	output impulse	10 Imp/kWh	
	impedance	0.5–1.5 kOhm	
	connection terminal	11 / 12	
Counter	LCD counter meter for active energy (kWh)		
	LCD display	rolling display	
	counter indication kWh for T1	display duration	15 s
		number of digits	7 (6.1 digits)
		digit height	8 mm
		digit width	4.5 mm
		display duration	2 s
	unit no.	customer specific data can be programmed at works	
	software version	display duration	2 s
	segment test	display duration	2 s
	energy flow	supply stopped	two-way flow
	operating display	3 arrows at lower end of LCD	
	LED test	10 Imp/Wh	(invisible)
	Current range	5 (63) A	
		nominal current I_N	5 A
		max. current I_{max}	63 A
consumption		0.8 W/current path	
start current		0.005 I_N	
Technical data			
ambient temperature	approbations	PTB approval	
	accuracy class	class 2, EN 61036, active energy	
	dimensions (mm)	107 x 90 x 71	
	weight	0.35 kg	
	mounting	DIN rail acc. to DIN DIN EN 50022-35	
	climatic conditions	EN 61036 interior meter	
	operation	-10 °C to +50 °C	
	storage	-40 °C to +70 °C	
	protection class	2	
	current terminals	7.6 x 8.3 mm	
	control terminals	2.5 x 3 mm	
	interface	optical interface acc. to IEC 61107	

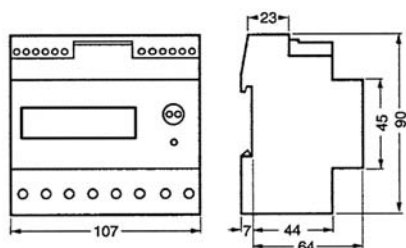ambient
temperature

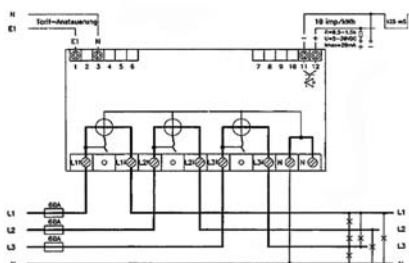


photo is similar to the original

drawing



diagram



EMU4174

Three-phase energy meter

Calibrated AC energy meter for dual tariff for clip-on onto 35 mm DIN rail

Type of energy meter		EMU4174
Mains		4-wire L-N (230 V)
	rated voltage U_N	230 V
	tolerance value	-20 %...+20 %
	consumption	0.8 W/phase
	frequency	50 Hz
	frequency range	45 ... 65 Hz
Output		1 S0-impulse output
(S0) I collector open	optocoupler	5-30 V DC / 20 mA max.
	impulse duration	approx. 125 ms
	output impulse	10 Imp/kWh
	impedance	0.5-1.5 kOhm
	connection terminal	11 / 12
Counter		LCD counter meter for active energy HT-NT (kWh)
	LCD display	rolling display
	counter indication kWh for T1	display duration 15 s number of digits 7 (6.1 digits) digit height 8 mm digit width 4.5 mm
	counter indication kWh for T2	display duration 15 s
	unit no.	display duration 2 s customer specific data can be programmed at works
	software version	display duration 2 s
	segment test	display duration 2 s
	energy flow	supply stopped two-way flow
	operating display	3 arrows at lower end of LCD
	LED test	10 Imp/Wh (not visible)
Current range		5 (63) A
	nominal current I_N	5 A
	max. current I_{max}	63 A
	consumption	0.8 W/current path
	start current	0.005 I_N
Technical data		
	approbations	PTB approval
	accuracy class	class 2, EN 61036, active energy
	dimensions (mm)	107 x 90 x 71
	weight	0.35 kg
	mounting	DIN rail acc. to DIN EN 50022-35
	climatic conditions	EN 61036 interior meter
	operation	-10 °C to +50 °C
	storage	-40 °C to +70 °C
	protection class	2
	current terminals	7.6 x 8.3 mm
	control terminals	2.5 x 3 mm
	interface	optical interface acc. to IEC 61107
	tariff control	230 V AC
	Tariff 2 is energized when terminals 1 and 3 are under load of 230 V AC.	

ambient
temperature



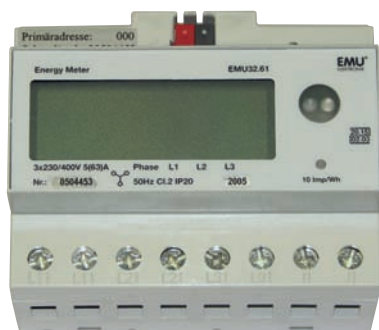


photo is similar to the original

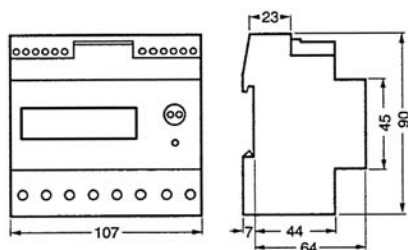drawing



diagram

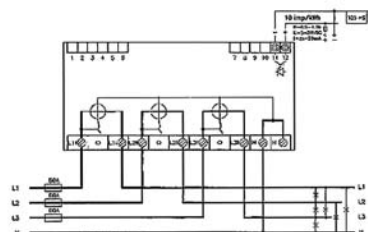

EMU4754

Three-phase energy meter M-BUS

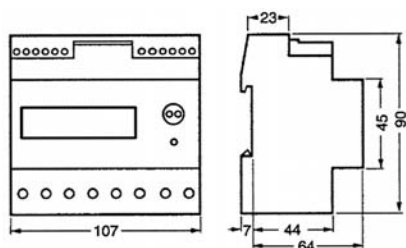
Calibrated AC energy meter for clip-on onto 35 mm DIN rail

Type of energy meter		EMU4754
Mains	4-wire	L-N (230 V)
	rated voltage U_N	230 V
	tolerance value	-20 %...+20 %
	consumption	0.8 W/phase
	frequency	50 Hz
Output	frequency range	45 ... 65 Hz
	1 S0-impulse output and M-Bus output	
	optocoupler	5-30 V DC / 20 mA max.
	impulse duration	approx. 125 ms
	output impulse	10 Imp/kWh
(S0) collector open	impedance	0.5 – 1.5 kOhm
	connection terminal	11 / 12
	M-BUS data selection	current system time of the meter
		operation hours of the meter
		total active energy
Counter		actual active power
		number of voltage interruptions
		error/ flag .../ time indication of the last power cut
	LCD counter meter for active energy (kWh)	
	LCD display	rolling display
	counter indication kWh for T1	display duration 15 s
		number of digits 7 (6.1 digits)
		digit height 8 mm
		digit width 4.5 mm
	unit no.	display duration 2 s
		customer specific data can be programmed at works
	software version	display duration 2 s
	segment test	display duration 2 s
	energy flow	supply stopped two-way flow
	operating display	3 arrows at lower end of LCD
Current range	LED test	10 Imp/Wh (invisible)
	nominal current I_N	5 (63) A
	max. current I_{max}	5 A
	consumption	63 A
	start current	0.8 W/current path
Technical data		0.005 I_N
	approbations	PTB approval, applied for active energy
	accuracy class	class 2, EN 61036
	dimensions (mm)	107 x 90 x 71
	weight	0.35 kg
ambient temperature	mounting	DIN rail acc. to DIN EN 50022-35
	climatic conditions	EN 61036 interior meter
	operation	-10 °C to +50 °C
	storage	-40 °C to +70 °C
	protection class	2
	current terminals	7.6 x 8.3 mm
	control terminals	2.5 x 3 mm
	interface	optical interface
		acc. to IEC 61107

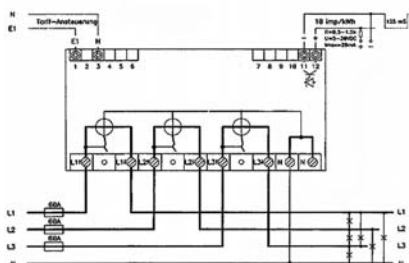


photo is similar to the original

drawing



diagram



EMU4774

Three-phase energy meter M-BUS

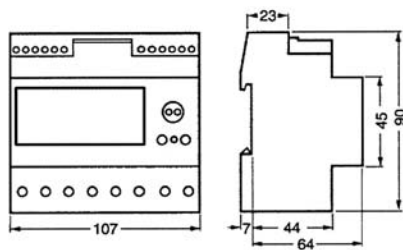
Calibrated AC energy meter for dual tariff for clip-on onto 35 mm DIN rail

Type of energy meter		EMU4774
Mains	4-wire	L-N (230 V)
	rated voltage U_N	230 V
	tolerance value	-20 %...+20 %
	consumption	0.8 W/phase
	frequency	50 Hz
	frequency range	45 ... 65 Hz
(S0) collector open	Output	
	1 impulse output and M-BUS output	
	optocoupler	5-30 V DC / 20 mA max.
	impulse duration	approx. 125 ms
	output impulse	10 Imp/kWh
	impedance	0.5 – 1.5 kOhm
	connection terminal	11 / 12
	M-BUS data selection	current system time of the meter
		operation hours of the meter
		total active energy
		actual active power
		number of voltage interruptions
		error/ flag .../ time indication of the last power cut
	Counter	
	LCD counter meter for active energy HT-NT (kWh)	
	LCD display	rolling display
	counter indication kWh for T1	display duration 15 s
		number of digits 7 (6.1 digits)
		digit height 8 mm
	counter indication kWh for T2	digit width 4.5 mm
		display duration 15 s
		display duration 2 s
	unit no.	customer specific data can be programmed at works
	software version	display duration 2 s
	segment test	display duration 2 s
	energy flow	supply stopped two-way flow
	operating display	3 arrows at lower end of LCD
	LED test	10 Imp/Wh (invisible)
Current range		5 (63) A
	nominal current I_N	5 A
	max. current I_{max}	63 A
	consumption	0.8 W/current path
	start current	0.005 I_N
Technical data		
ambient temperature	approbations	PTB approval, applied for active energy
	accuracy class	class 2, EN 61036
	dimensions (mm)	107 x 90 x 71
	weight	0.35 kg
	mounting	DIN rail acc. to DIN EN 50022-35
	climatic conditions	EN 61036 interior meter
	operation	-10 °C to +50 °C
	storage	-40 °C to +70 °C
	protection class	2
	current terminals	7.6 x 8.3 mm
	control terminals	2.5 x 3 mm
	interface	optical interface
		acc. to IEC 61107
	tariff control	230 V AC
	Tariff 2 is energized when terminals 1 and 3 are under load of 230 V AC	

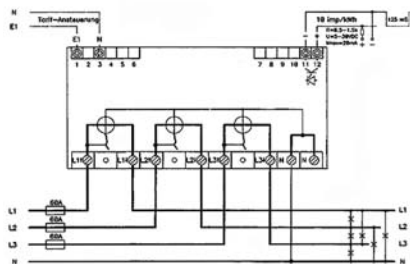


photo is similar to the original

drawing



diagram



EMU4164

Three-phase energy meter

Calibrated AC energy meter for dual tariff for clip-on onto 35 mm DIN rail


Type of energy meter		EMU4164
Mains		4-wire L-N (230 V) rated voltage U_N 230 V tolerance value -20 %...+20 % consumption 0.8 W/phase frequency 50 Hz frequency range 45 ... 65 Hz
Output		1 S0-impulse output optocoupler 5-30 V DC / 20 mA max. impulse duration ca. 125 ms output impulse 10 Imp/kWh impedance 0.5 – 1.5 kOhm connection terminal 11 / 12
Counter		LCD counter meter for active energy/active power HT-NT (kWh) LCD display counter (push black button to operate) active energy (T1) kWh, price/kWh, total price 7 (6.1) digits 4.5 x 8 mm active energy (T2) kWh, price/kWh total price present active power kW total, kW L1-L2-L3 present voltage V L1-L2-L3 present current A total, A L1-L2-L3 unit no. 5 digits LED test 10 Imp/Wh (invisible)
Current range		5 (63) A nominal current I_N 5 A max. current I_{max} 63 A consumption 0.8 W/current path start current 0.005 I_N
Technical data		approbations PTB approval accuracy class class 2, EN 61036, active energy dimensions (mm) 107 x 90 x 71 weight 0.35 kg mounting DIN rail acc. to DIN EN 50022-35 climatic conditions EN 61036 interior meter operation -10 °C to +50 °C storage -40 °C to +70 °C protection class 2 current terminals 7.6 x 8.3 mm control terminals 2.5 x 3 mm interface optical interface acc. to IEC 61107 tariff start 230 V AC Tariff 2 is energized when terminals 1 and 2 are under load of 230 V AC

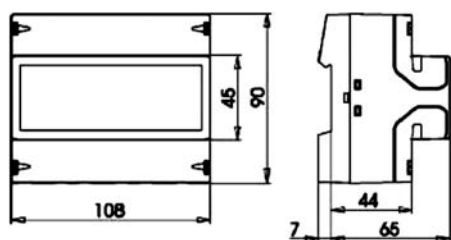ambient temperature

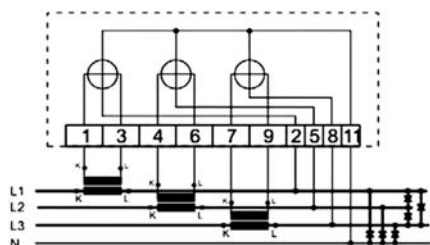


photo is similar to the original

drawing



diagram



EEH4115

Three-phase energy transformer meter

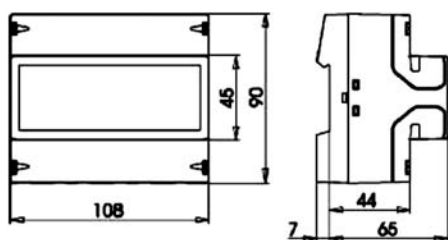
Calibrated AC energy transformer meter for clip-on onto 35 mm DIN rail

Type of energy meter	EEH4115xxxx	
	xxxx declaring the primary current is absolutely necessary	
Mains	4-wire	L-N (230)V
	rated voltage U_N	230 V
	tolerance value	-20 %...+15 %
	consumption	< 3.0 VA
	frequency	50 Hz
	frequency range	45 ... 65 Hz
Output	1 S0-impulse output	
	optocoupler	40 V / 27 mA max.
(S0)	impulse duration	100 ms +/-50 %
collector open	output impulse	1000 Imp/kWh
	connection terminal	40 / 41
(option)	communication	
	RS485	EEH4315xxxx
	connection	multi-drop
	cable type	screened, wound pair
	max. cable length	1000 m
	connection	terminal screw
	isolation	3.7 kV rms for 1 min. between all meters and other units
	transmission system	asynchronous
	format type	MODBUS RTU
	transmission time	1200 to 19200 bits/s
	terminal A and B	120 Ohm
	max. linked meters	32
Counter	1 counter meter for active energy (kWh)	
	electro-mechanical meter	
	number of digits	7 (6.1 digits)
	digit height	4 mm
	digit width	1.2 mm
	LED test	1000 Imp/kWh (red)
	LED operation	status (red)
(option)	reactive energy	EEH3105xxxx
Current range	5 A	
	nominal current I_N	5 A
	max. current I_{max}	6 A
	consumption	< 0.02 VA/current path
	start current	0.002 I_N
(option)	nominal current I_N	1 A EEH3111xxxx
Primary current	0.5 A up to 2000 A	
	If not stated otherwise, the standard version 5 A or 1 A will be supplied	
Technical data		
construction	approbations	PTB approval applied for
	active energy	EN 61036 class 1
	reactive energy	EN 61268 class 2
	housing	PA6.6 in conformity with UL 94 V-0
ambient temperature	dimensions (mm)	108 x 90 x 72
	weight	0.6 kg
	mounting	DIN rail acc. to DIN DIN EN 50022
	climatic conditions	EN 61036 interior meter
ambient temperature	operation	-20 °C to +55 °C
	storage	-25 °C to +70 °C
	protection class	2
	current terminals	< 10 mm ²
	control terminals	< 2.5 mm ²

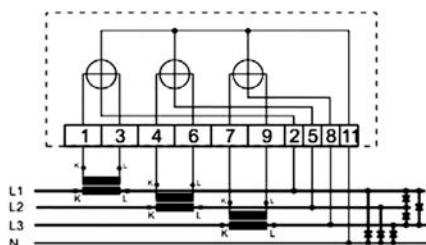


photo is similar to the original

drawing



diagram



EEH4125

Three-phase energy transformer meter

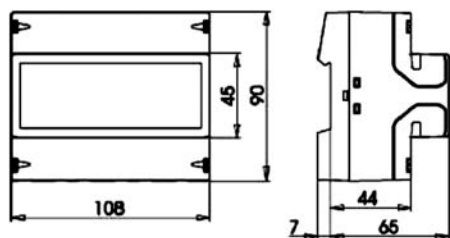
Calibrated AC energy transformer meter for dual tariff for clip-on onto 35 mm DIN rail

Type of energy meter	EEH4125xxxx	
	xxxx declaring the primary current is absolutely necessary	
Mains	4-wire	L-N (230 V)
	rated voltage U_N	230 V
	tolerance value	-20 %...+15 %
	consumption	< 3.0 W/phase
	frequency	50 Hz
	frequency range	45 ... 65 Hz
Output	1 S0-impulse output	
	optocoupler	40 V / 27 mA max.
(S0)	impulse duration	100 ms +/-50 %
collector open	output impulse	1000 Imp/kWh
	connection terminal	40 / 41 / 42
(option)	communication	
	RS485	EEH4425xxxx
	connection	multi-drop
	cable type	screened, wound pair
	max. cable length	1000 m
	connection	terminal screw
	isolation	3.7 kV rms for 1 min. between all meters and other units
	transmission system	asynchronous
	format type	MODBUS RTU
	transmission time	1200 to 19200 bits/s
	terminal A and B	120 Ohm
	max. linked meters	32
Counter	2 counters for active energy HT-NT (kWh)	
	2 electro-mechanical counters	
	number of digits	7 (6.1 digits)
	digit height	4 mm
	digit width	1.2 mm
	LED test	1000 Imp/kWh (red)
	LED operation	status (tariffs) (red)
(option)	2 counters for active and reactive energy (kWh/kvarh)	EEH4235xxxx
	2 counters for active energy (import/export) (kWh)	EEH4245xxxx
Current range	5 A	
	nominal current I_N	5 A
	max. current I_{max}	6 A
	consumption	0.02 W/current path
	start current	0.002 I_N
(option)	nominal current I_N	1 A EEH4221xxxx
Primary current	0.5 A to 2000 A	
	If not stated otherwise, the standard version 5 A or 1 A will be supplied.	
Technical data		
	approbations	PTB approval applied for
	active energy	EN 61036 class 1
	reactive energy	EN 61268 class 2
construction	housing	PA6.6 in conformity with UL 94 V-0
	dimensions (mm)	108 x 90 x 72
	weight	0.6 kg
	mounting	DIN rail acc. to DIN EN 50022
	climatic conditions	EN 61036 interior meter
ambient temperature	operation	-20 °C to +55 °C
	storage	-25 °C to +70 °C
	protection class	2
	current terminals	< 10 mm ²
	control terminals	< 2.5 mm ²
	tariff start	230 V AC
	Tariff 2 is energized when terminals 13 and 15 are under load of 230 V AC.	

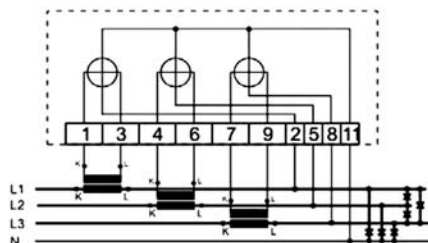


photo is similar to the original

drawing



diagram



EEH4175

Three-phase energy transformer meter

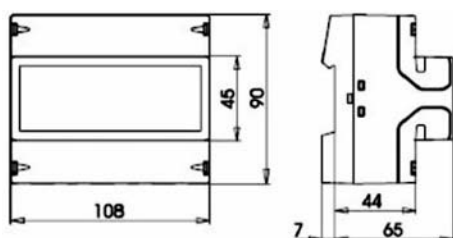
Calibrated AC energy transformer meter for clip-on onto 35 mm DIN rail

Type of energy meter	EEH4175xxxx	
	xxxx declaring the primary current is absolutely necessary	
Mains	4-wire	L-N (230 V)
	rated voltage U_V	230 V
	tolerance value	-20 %...+15 %
	consumption	< 3.0 W
	frequency	50 Hz
	frequency range	45...65 Hz
Output	1 S0-impulse output	
	optocoupler	40 V / 27 mA max.
(S0) I	impulse duration	100 ms +/-50 %
collector open	output impulse	1000 Imp/kWh
	connection terminal	40 / 41
(option)	communication	
	RS485	EEH4475xxxx
	connection	multi-drop
	cable type	screened, wound pair
	max. cable length	1000 m
	connection	terminal screw
	isolation	3.7 kV rms for 1 min. between all meters and other units
	transmission system	asynchronous
	format type	MODBUS RTU
	transmission time	1200 to 19200 bits/s
	terminal A and B	120 Ohm
	max. linked meters	32
Counter	LCD counter meter for active energy HT-NT (kWh)	
	number of digits	2 x 9 (8.1 digits)
	digit height	4.86 mm
	digit width	2.96 mm
(option)	2 counters for active and reactive energy (kWh/kvarh)	EEH4285xxxx
	2 counters for active energy (import/export) (kWh)	EEH4295xxxx
Current range	5 A	
	nominal current I_N	5 A
	max. current I_{max}	6 A
	consumption	< 0.02 W/current path
	start current	0.002 I_N
(option)	nominal current I_N	1 A EEH4271xxxx
Primary current	0.5 A up to 2000 A	
	If not stated otherwise, the standard version 5 A or 1 A will be supplied	
Technical data		
	approbations	PTB approval applied for
	active energy	EN 61036 class 1
	reactive energy	EN 61268 class 2
construction	housing	PA6.6 in conformity with UL 94 V-0
	dimensions (mm)	108 x 90 x 72
	weight	0.6 kg
	mounting	DIN rail acc. to DIN EN 50022
	climatic conditions	EN 61036 interior meter
ambient temperature	operation	-20 °C to +55 °C
	storage	-25 °C to +70 °C
	protection class	2
	current terminals	< 10 mm ²
	control terminals	< 2.5 mm ²
	tariff start	230 V AC
	Tariff 2 is energized when terminals 13 and 15 are under load of 230 V AC.	

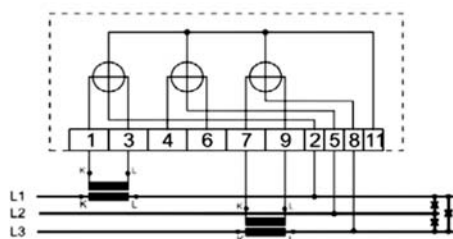


photo is similar to the original

drawing



diagram



EEH3115

Three-phase energy transformer meter

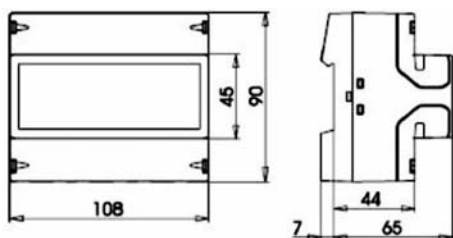
Calibrated AC energy transformer meter for clip-on onto 35 mm DIN rail

Type of energy meter	EEH3115xxxx	
	xxxx declaring the primary current is absolutely necessary	
Mains	3-wire	L-L (400 V)
	rated voltage U_N	230 V
	tolerance value	-20 %...+15 %
	consumption	< 3.0 W/phase
	frequency	50 Hz
	frequency range	45 ... 65 Hz
Output	1 S0-impulse output	
	optocoupler	40 V / 27 mA max.
(S0)	impulse duration	100 ms +/-50 %
collector open	output impulse	1000 Imp/kWh
	connection terminal	40 / 41
(option)	communication	
	RS485	EEH3115xxxx
	connection	multi-drop
	cable type	screened, wound pair
	max. cable length	1000 m
	connection	terminal screw
	isolation	3.7 kV rms for 1 min. between all meters and other units
	transmission system	asynchronous
	format type	MODBUS RTU
	transmission time	1200 to 19200 bits/s
	terminal A and B	120 Ohm
	max. linked meters	32
Counter	1 counter meter for active energy (kWh)	
	electro-mechanical meter	
	number of digits	7 (6.1 digits)
	digit height	4 mm
	digit width	1.2 mm
	LED test	1000 Imp/kWh (red)
	LED operation	status (red)
(option)	reactive energy (kvarh)	EEH3105xxxx
Current range	5 A	
	nominal current I_N	5 A
	max. current I_{max}	6 A
	consumption	< 0.02 W/current path
	start current	0.002 I_N
(option)	nominal current I_N	1 A EEH3111xxxx
Primary current	0.5 A up to 2000 A	
	If not stated otherwise, the standard version 5 A or 1 A will be supplied.	
Technical data		
	approbations	PTB approval applied for
	active energy	EN 61036 class 1
	reactive energy	EN 61268 class 2
construction	housing	PA6.6 in conformity with UL 94 V-0
	dimensions (mm)	108 x 90 x 72
	weight	0.6 kg
	mounting	DIN rail acc. to DIN EN 50022
	climatic conditions	EN 61036 interior meter
ambient temperature	operation	-20 °C to +55 °C
	storage	-25 °C to +70 °C
	protection class	2
	current terminals	< 10 mm ²
	control terminals	< 2.5 mm ²

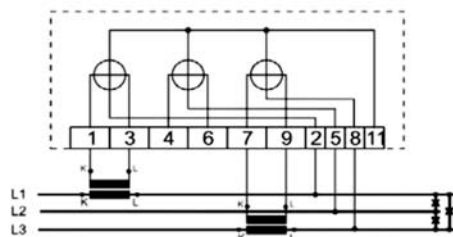


photo is similar to the original

drawing



diagram



EEH3125

Three-phase energy transformer meter

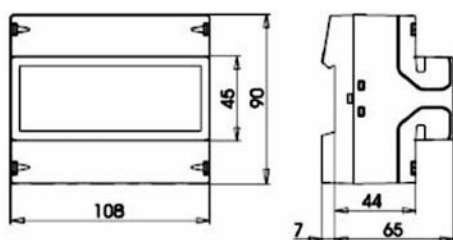
Calibrated AC energy transformer meter for dual tariff for clip-on onto 35 mm DIN rail

Type of energy meter	EEH3125xxxx	
	xxxx declaring the primary current is absolutely necessary	
Mains	3-wire	L-L (400 V)
	rated voltage U_N	230 V
	tolerance value	-20 %...+15 %
	consumption	< 3.0 W/phase
	frequency	50 Hz
	frequency range	45 ... 65 Hz
Output	1 S0-impulse output	
	optocoupler	40 V / 27 mA max.
(S0)	impulse duration	100 ms +/-50 %
collector open	output impulse	1000 Imp/kWh
	connection terminal	40 / 41 / 42
(option)	communication	
	RS485	EEH3425xxxx
	connection	multi-drop
	cable type	screened, wound pair
	max. cable length	1000 m
	connection	terminal screw
	isolation	3.7 kV rms for 1 min. between all meters and other units
	transmission system	asynchronous
	format type	MODBUS RTU
	transmission time	1200 to 19200 bits/s
	terminal A and B	120 Ohm
	max. linked meters	32
Counter	2 counters for active energy HT-NT (kWh)	
	2 electro-mechanical counters	
	number of digits	7 (6.1 digits)
	digit height	4 mm
	digit width	1.2 mm
	LED test	1000 Imp/kWh (red)
	LED operation	status (tariffs) (red)
(option)	2 counters for active and reactive energy (kWh/kvarh)	EEH3225xxxx
	2 counters for active energy (import/export) (kWh)	EEH3245xxxx
Current range	5 A	
	nominal current I_N	5 A
	max. current I_{max}	6 A
	consumption	< 0.02 W/current path
	start current	0.002 I_N
(option)	nominal current I_N	1A EEH3221xxxx
Primary current	0.5 A to 2000 A	
	If not stated otherwise, the standard version 5 A or 1 A will be supplied.	
Technical data		
	approbations	PTB approval applied for
	active energy	EN 61036 class 1
	reactive energy	EN 61268 class 2
construction	housing	PA6,6 in conformity with UL 94 V-0
	dimensions (mm)	108 x 90 x 72
	weight	0.6 kg
	mounting	DIN rail acc. to DIN EN 50022
	climatic conditions	EN 61036 interior meter
ambient temperature	operation	-20 °C to +55 °C
	storage	-25 °C to +70 °C
	protection class	2
	current terminals	< 10 mm ²
	control terminals	< 2.5 mm ²
	tariff start	230 V AC
	Tariff 2 is energized when terminal 13 and 15 are under load of 230 V AC	

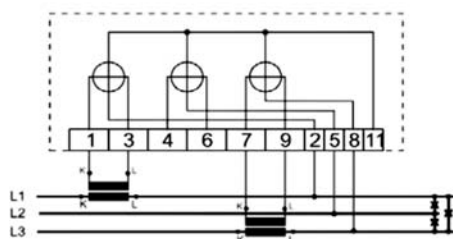


photo is similar to the original

drawing



diagram



EEH3175

Three-phase energy transformer meter

Calibrated AC energy transformer meter for dual tariff for clip-on onto 35 mm DIN rail

Type of energy meter	EEH3175xxxx	
	xxxx declaring the primary current is absolutely necessary	
Mains	3-wire	L-L (400 V)
	rated voltage U_N	230 V
	tolerance value	-20 %...+15 %
	consumption	< 3.0 W
	frequency	50 Hz
	frequency range	45 ... 65 Hz
Output	1 S0-impulse output	
	optocoupler	40 V / 27 mA max.
(S0)	impulse duration	100 ms +/-50 %
collector open	output impulse	1000 Imp/kWh
	connection terminal	40 / 41
(option)	communication	
	RS485	EEH3475xxxx
	connection	multi-drop
	cable type	screened, wound pair
	max. cable length	1000 m
	connection	terminal screw
	isolation	3.7 kV rms for 1 min. between all meters and other units
	transmission system	asynchronous
	format type	MODBUS RTU
	transmission time	1200 to 19200 bits/s
	terminal A and B	120 Ohm
	max. linked meters	32


Counter	LCD counter meter for active energy HT-NT (kWh)	
	number of digits	2 x 9 (8.1 digits)
	digit height	4.86 mm
	digit width	2.96 mm
(option)	2 counters for active and reactive energy (kWh/kvarh)	EEH3285xxxx
	2 counters for active energy (import/export) (kWh)	EEH3295xxxx
Current range	5 A	
	nominal current I_N	5 A
	max. current I_{max}	6 A
	consumption	< 0.02 W/current path
	start current	0.002 I_N
(option)	nominal current I_N	1A EEH3271xxxx
Primary current	0.5 A up to 2000 A	
	If not stated otherwise, the standard version 5 A or 1 A will be supplied.	

Technical data		
	approbations	PTB approval applied for
	active energy	EN 61036 class 1
	reactive energy	EN 61268 class 2
construction	housing	PA6.6 in conformity with UL 94 V-0
	dimensions (mm)	108 x 90 x 72
	weight	0.6 kg
	mounting	DIN rail acc. to DIN EN 50022
	climatic conditions	EN 61036 interior meter
ambient temperature	operation	-20 °C to +55 °C
	storage	-25 °C to +70 °C
	protection class	2
	current terminals	< 10 mm ²
	control terminals	< 2.5 mm ²
	tariff start	230 V AC
	Tariff 2 is energized when terminal 13 and 15 are under load of 230 V AC	



photo is similar to the original

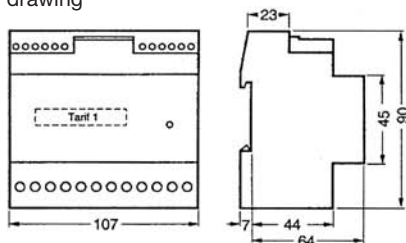drawing



diagram

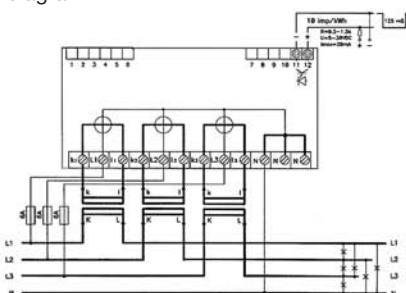


table 1

Encoder Pos.	5 A to	LED imp.-value
5	0.5 A	100 imp/Wh
4	1.0 A	50 imp/Wh
3	2.0 A	25 imp/Wh
2	2.5 A	20 imp/Wh
1	4.0 A	12.5 imp/Wh
0	5.0 A	10 imp/Wh
15	5.0 A	10 imp/Wh
14	10 A	5 imp/Wh
13	20 A	2.5 imp/Wh
12	25 A	2 imp/Wh
11	40 A	1.25 imp/Wh
10	50 A	1 imp/Wh
9	100 A	0.5 imp/Wh
8	125 A	0.4 imp/Wh
7	200 A	0.25 imp/Wh
6	250 A	0.2 imp/Wh





table 2

Encoder Pos.	5 A to	LED imp.-value
5	5 A	10 imp/Wh
4	10 A	5 imp/Wh
3	20 A	2.5 imp/Wh
2	25 A	2 imp/Wh
1	40 A	1.25 imp/Wh
0	50 A	1 imp/Wh
15	50 A	1 imp/Wh
14	100 A	0.5 imp/Wh
13	200 A	0.25 imp/Wh
12	250 A	0.2 imp/Wh
11	400 A	0.125 imp/Wh
10	500 A	0.1 imp/Wh
9	1000 A	0.05 imp/Wh
8	1250 A	0.04 imp/Wh
7	2000 A	0.025 imp/Wh
6	2500 A	0.02 imp/Wh



EMU4115

Three-phase energy transformer meter

Calibrated AC energy transformer meter for clip-on onto 35 mm DIN rail

Type of energy meter	EMU4115xxxx xxxx declaring the primary current is absolutely necessary	
Mains	4-wire rated voltage U_N tolerance value consumption frequency frequency range	L-N (230 V) 230 V -20 %...+20 % 0.8 W/phase 50 Hz 45 ... 65 Hz
Output	1 S0-impulse output (S0) collector open	optocoupler impulse duration output impulse impedance connection terminal 5-30 V DC / 20 mA max. approx. 125 ms 10 Imp/kWh 0.5 A to 250 A 1 Imp/kWh 400 A to 2500 A 0.5-1.5 kOhm 11 / 12
Counter	1 counter meter for active energy (kWh) 1 electro-mechanical counter	number of digits digit height digit width LED test LED operation 7 (6.1 digits) 0.5 A up to 250 A 7 (7.0 digits) 400 A up to 2500 A 5 mm 3 mm 10 Imp/Wh (invisible) status (green)
Current range	5 A nominal current I_N max. current I_{max} consumption start current	5 A 6 A 0.8 W/current path 0.002 I_N
Primary current	0.5 A up to 2000 A If not stated otherwise, the standard version 5 A will be supplied.	
Technical data	approbations accuracy class dimensions (mm) weight mounting climatic conditions operation storage protection class current terminals control terminals	PTB approval class 1, EN 61036, active energy 107 x 90 x 71 0.35 kg DIN rail acc. to DIN EN 50022-35 EN 61036 interior meter -10 °C to +50 °C -40 °C to +70 °C 2 4.2 x 6.5 mm 2.5 x 3 mm


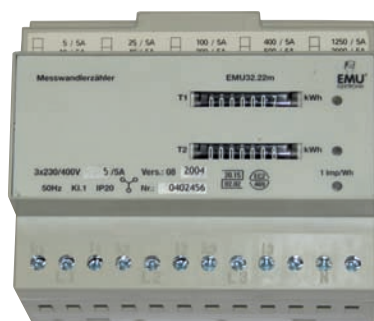


photo is similar to the original

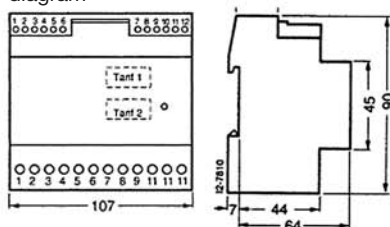diagram



drawing

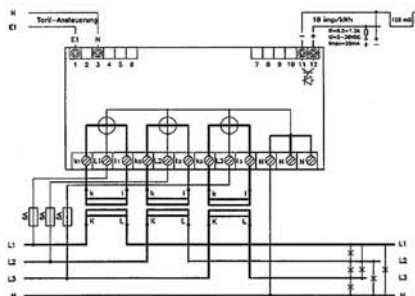


table 1

Encoder Pos.	5 A to	LED imp.-value
5	0.5 A	100 imp/Wh
4	1.0 A	50 imp/Wh
3	2.0 A	25 imp/Wh
2	2.5 A	20 imp/Wh
1	4.0 A	12.5 imp/Wh
0	5.0 A	10 imp/Wh
15	5.0 A	10 imp/Wh
14	10 A	5 imp/Wh
13	20 A	2.5 imp/Wh
12	25 A	2 imp/Wh
11	40 A	1.25 imp/Wh
10	50 A	1 imp/Wh
9	100 A	0.5 imp/Wh
8	125 A	0.4 imp/Wh
7	200 A	0.25 imp/Wh
6	250 A	0.2 imp/Wh

table 2

Encoder Pos.	5 A to	LED imp.-value
5	5 A	10 imp/Wh
4	10 A	5 imp/Wh
3	20 A	2.5 imp/Wh
2	25 A	2 imp/Wh
1	40 A	1.25 imp/Wh
0	50 A	1 imp/Wh
15	50 A	1 imp/Wh
14	100 A	0.5 imp/Wh
13	200 A	0.25 imp/Wh
12	250 A	0.2 imp/Wh
11	400 A	0.125 imp/Wh
10	500 A	0.1 imp/Wh
9	1000 A	0.05 imp/Wh
8	1250 A	0.04 imp/Wh
7	2000 A	0.025 imp/Wh
6	2500 A	0.02 imp/Wh

EMU4125

Three-phase energy transformer meter

Calibrated AC energy transformer meter for dual tariff for clip-on onto 35 mm DIN rail

Type of energy meter

EMU4125xxxx

xxxx declaring the primary current is absolutely necessary

Mains

4-wire

L-N (230 V)

rated voltage U_N

230 V

tolerance value

-20 %...+20 %

consumption

0.8 W/phase

frequency

50 Hz

frequency range

45 ... 65 Hz

Output

1 S0-impulse output

(S0)
collector open

optocoupler

5-30 V DC / 20 mA max.

impulse duration

approx. 125 ms

output impulse

10 Imp/kWh

0.5 A up to 250 A

1 Imp/kWh

400 A up to 2500 A

impedance

0.5 – 1.5 kOhm

connection terminal

11 / 12

Counter

2 counters for active energy HT-NT (kWh)

2 electro-mechanical meters

number of digits

7 (6.1 digits)

0.5 A up to 250 A

number of digits

7 (7.0 digits)

400 A up to 2500 A

digit height

4 mm

digit width

1.2 mm

LED test

10 Imp/Wh

(invisible)

LED operations

status (tariffs)

(green)

Current range

5 A

nominal current I_N

5 A

max. current I_{max}

6 A

consumption

0.8 W/current path

start current

0.002 I_N

Primary current

0.5 A up to 2000 A

If not stated otherwise, the standard version 5 A will be supplied.

Technical data

approbations

PTB approval

accuracy class

class 1, EN 61036, active energy

dimensions (mm)

107 x 90 x 71

weight

0.35 kg

mounting

DIN rail acc. to DIN EN 50022-35

climatic conditions

EN 61036 interior meter

operation

-10 °C to +50 °C

storage

-40 °C to +70 °C

protection class

2

current terminals

4.2 x 6.5 mm

control terminals

2.5 x 3 mm

tariff start

230 V AC

Tariff 2 is energized when terminals 1 and 3 are under load of 230 V AC.



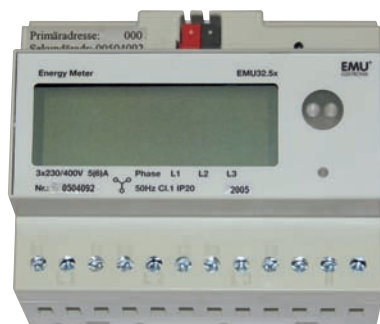


photo is similar to the original

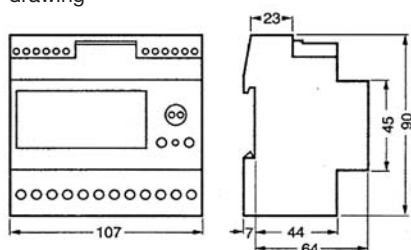drawing



diagram

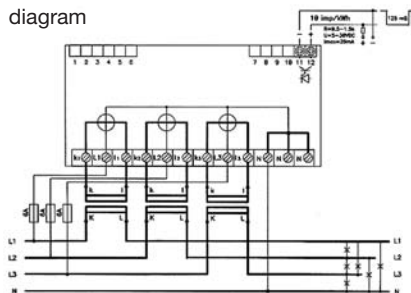

EMU4155

Three-phase energy transformer meter

Calibrated AC energy transformer meter for clip-on onto 35 mm DIN rail

Type of energy meter		EMU4155
Mains	4-wire	L-N (230 V)
	rated voltage U_N	230 V
	tolerance value	-20 %...+20 %
	consumption	0.8 W/phase
	frequency	50 Hz
	frequency range	45 ... 65 Hz
Output	1 S0-impulse output	
	optocoupler	5-30 V DC / 20 mA max.
	impulse duration	approx. 20 ms
	output impulse	1000 Imp/kWh
	impedance	0.5 – 1.5 kOhm
(S0) collector open	connection terminal	11 / 12
Counter	LCD-counter meter for active energy (kWh)	
	LCD display	rolling counter
	counter indication kWh for T1	display duration 15 s
		number of digits 7 (6.1 digits)
		digit height 8 mm
		digit width 4.5 mm
	unit no.	display duration 2 s
		customer specific data can be programmed at works
	software version	display duration 2 s
	segment test	display duration 2 s
	energy flow	supply stopped two-way flow
	operating display	3 arrows at lower end of LCD
	LED test	10 Imp/Wh (invisible)
Current range	5 A	
	nominal current I_N	5 A
	max. current I_{max}	6 A
	consumption	0.8 W/current path
	start current	0.002 I_N
Technical data	approbations	PTB approval applied for active energy
	accuracy class	class 1, EN 61036
	dimensions (mm)	107 x 90 x 71
	weight	0.35 kg
	mounting	DIN rail acc. to DIN EN 50022-35
	climatic conditions	EN 61036 interior meter
	operation	-10 °C to +50 °C
	storage	-40 °C to +70 °C
	protection class	2
	current terminals	4.2 x 6.5 mm
	control terminals	2.5 x 3 mm
	interface	optical interface acc. to IEC 61107

ambient
temperature



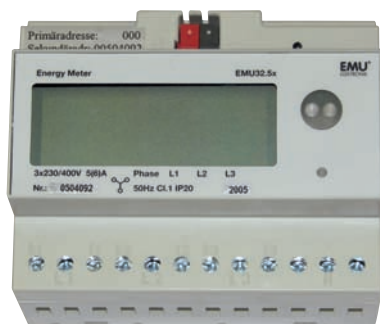


photo is similar to the original

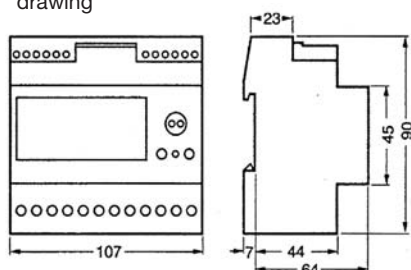drawing



diagram

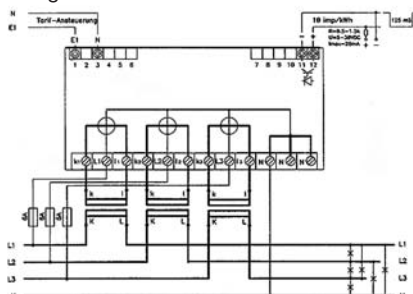

EMU4175

Three-phase energy transformer meter

Calibrated AC energy transformer meter for dual tariff for clip-on onto 35 mm DIN rail

Type of energy meter		EMU4175
Mains	4-wire	L-N (230 V)
	rated voltage U_N	230 V
	tolerance value	-20 %...+20 %
	consumption	0.8 W/phase
	frequency	50 Hz
	frequency range	45 ... 65 Hz
Output	1 S0-impulse output	
	optocoupler	5-30 V DC / 20 mA max.
	impulse duration	approx. 20 ms
	output impulse	1000 Imp/kWh
	impedance	0.5-1.5 kOhm
(S0) collector open	connection terminal	11 / 12
Counter		LCD counter meter for active energy HT-NT (kWh)
LCD display	rolling counter	
	display duration	15 s
	number of digits	7 (6.1 digits)
	digit height	8 mm
	digit width	4.5 mm
counter indication kWh for T2	display duration	15 s
	display duration	2 s
	customer specific data can be programmed at works	
	display duration	2 s
	display duration	2 s
unit no.	supply stopped	two-way flow
	3 arrows at lower end of LCD	
	10 Imp/Wh	(invisible)
software version	segment test	
	energy flow	
	operating display	
	LED test	
Current range		5 A
	nominal current I_N	5 A
	max. current I_{max}	6 A
	consumption	0.8 W/current path
	start current	0.002 I_N
Technical data		
ambient temperature	approbations	PTB approval applied for active energy
	accuracy class	class 1, EN 61036
	dimensions (mm)	107 x 90 x 71
	weight	0.35 kg
	mounting	DIN rail acc. to DIN EN 50022-35
	climatic conditions	EN 61036 interior meter
	operation	-10 °C to +50 °C
	storage	-40 °C to +70 °C
	protection class	2
	current terminals	4.2 x 6.5 mm
	control terminals	2.5 x 3 mm
	interface	optical interface
	acc. to IEC 61107	
	tariff start	230 V AC
	Tariff 2 is energized when terminals 1 and 3 are under load of 230 V AC	



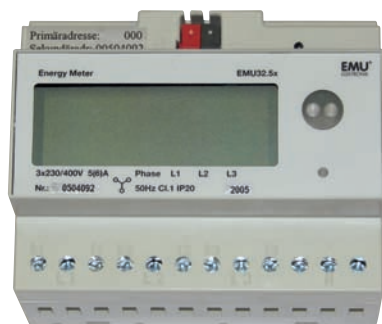


photo is similar to the original

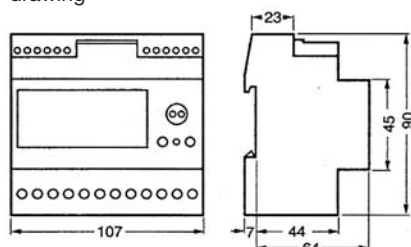drawing



diagram

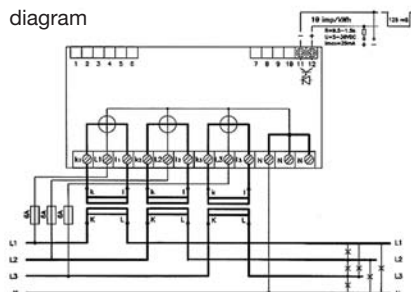

EMU4755

Three-phase energy transformer meter M-BUS

Calibrated AC energy transformer meter for clip-on onto 35 mm DIN rail

Type of energy meter		EMU4755
Mains	4-wire	L-N (230 V)
	rated voltage U_N	230 V
	tolerance value	-20 %...+20 %
	consumption	0.8 VA
	frequency	50 Hz
	frequency range	45 ... 65 Hz
Output	1 impulse output and M-BUS output	
	optocoupler	5-30 V DC / 20 mA max.
	impulse duration	ca. 20 ms
	output impulse	1000 Imp/kWh
	impedance	0.5 – 1.5 kOhm
	connection terminal	11 / 12
	M-BUS data selection	current system time of the meter
		operation hours of the meter
		total active energy
		actual active power
Counter	LCD counter meter for active energy (kWh)	
	LCD display	rolling counter
	counter indication kWh for T1	display duration 15 s
		number of digits 7 (6.1 digits)
		digit height 8 mm
		digit width 4.5 mm
	unit no.	display duration 2 s
		customer specific data can be programmed at works
	software version	display duration 2 s
	segment test	display duration 2 s
Current range	energy flow	supply stopped
	operating display	3 arrows at lower end of LCD
	LED test	10 Imp/Wh (invisible)
	5 A	
	nominal current I_N	5 A
	max. current I_{max}	6 A
	consumption	0.8 W/current path
	start current	0.002 I_N
Technical data	PTB approval applied for active energy	
	approbations	class 1, EN 61036
	accuracy class	107 x 90 x 71
	dimensions (mm)	0.35 kg
	weight	DIN rail acc. to DIN EN 50022-35
	mounting	EN 61036 interior meter
	climatic conditions	-10 °C to +50 °C
	operation	-40 °C to +70 °C
	storage	2
	protection class	4.2 x 6.5 mm
ambient temperature	current terminals	2.5 x 3 mm
	control terminals	optical interface
	interface	acc. to IEC 61107



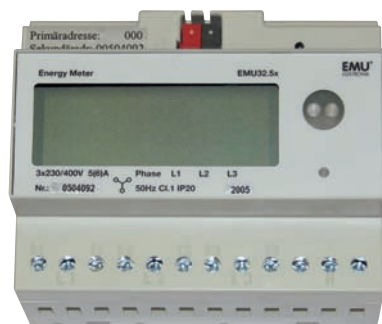


photo is similar to the original

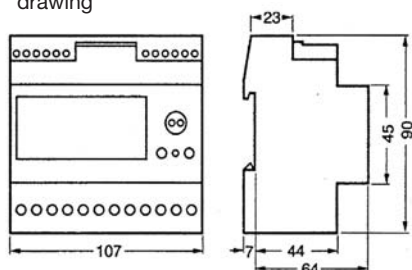drawing



diagram

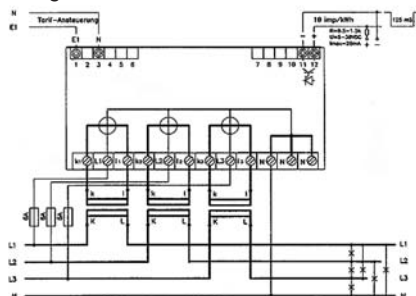

EMU4775

Three-phase energy transformer meter M-BUS

Calibrated AC energy transformer meter for dual tariff for clip-on onto 35 mm DIN rail

Type of energy meter		EMU4775
Mains	4-wire	L-N (230 V)
	rated voltage U_N	230 V
	tolerance value	-20 %...+20 %
	consumption	0.8 W/phase
	frequency	50 Hz
	frequency range	45 ... 65 Hz
Output (S0) collector open	1 impulse output and M-BUS output	
	optocoupler	5-30 V DC / 20 mA max.
	impulse duration	approx. 20 ms
	output impulse	1000 Imp/kWh
	impedance	0.5 – 1.5 kOhm
	connection terminal	11 / 12
	M-BUS data selection	current system time of the meter
		operation hours of the meter
		total active energy
		actual active power
		number of voltage interruptions
		error flags/time indication of the
		last power cut
Counter	LCD counter meter for active energy HT-NT (kWh)	
	LCD display	rolling counter
	counter indication kWh for T1	display duration 15 s
		number of digits 7 (6.1 digits)
		digit height 8 mm
		digit width 4.5 mm
	counter indication kWh for T2	display duration 15 s
	unit no.	display duration 2 s
		customer specific data can be
		programmed at works
	software version	display duration 2 s
	segment test	display duration 2 s
	energy flow	supply stopped two-way flow
	operating display	3 arrows at lower end of LCD
	LED test	10 Imp/Wh (invisible)
Current range	5 A	
	nominal current I_N	5 A
	max. current I_{max}	6 A
	consumption	0.8 W/current path
	start current	0.002 I_N
Technical data ambient temperature		
	approbations	PTB approval applied for active energy
	accuracy class	class 1, EN 61036
	dimensions (mm)	107 x 90 x 71
	weight	0.35 kg
	mounting	DIN rail acc. to DIN EN 50022-35
	climatic conditions	EN 61036 interior meter
	operation	-10 °C to +50 °C
	storage	-40 °C to +70 °C
	protection class	2
	current terminals	4.2 x 6.5 mm
	control terminals	2.5 x 3 mm
	interface	optical interface acc. to IEC 61107
	tariff start	230 V AC
	Tariff is energized when terminals 1 and 3 are under load of 230 V AC	



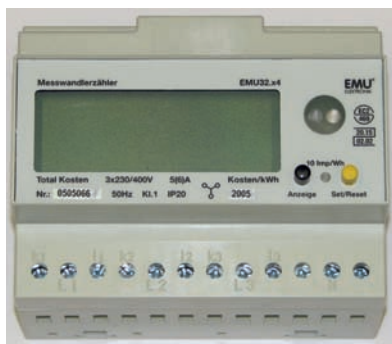


photo is similar to the original

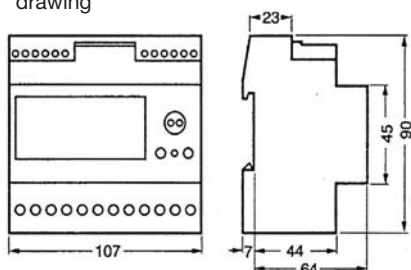drawing



diagram

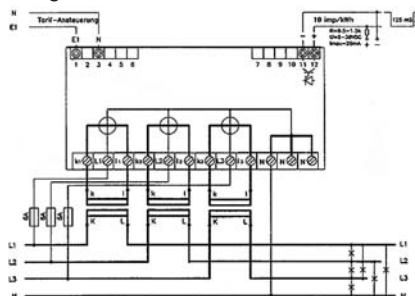

EMU4165

Three-phase energy transformer meter

Calibrated AC energy transformer meter for dual tariff for clip-on onto 35 mm DIN rail

Type of energy meter		EMU4165xxxx
		xxxx declaring the primary current is absolutely necessary
Mains		4-wire
		L-N (230 V)
		rated voltage U_N
		230 V
		tolerance value
		-20 %...+20 %
		consumption
		0.8 W/phase
		frequency
		50 Hz
		frequency range
		45 ... 65 Hz
Output		1 S0-impulse output
		optocoupler
		5-30 V DC / 20 mA max.
		impulse duration
		approx. 125 ms
		output impulse
		10 Imp/kWh
		impedance
		0.5 – 1.5 kOhm
		connection terminal
		11 / 12
Counter		LCD counter meter for active energy/active power HT-NT (kWh)
		LCD display
		counter (push black button to operate)
		kWh, price/kWh, total price
		7 (6.1) digits
		4.5 x 8 mm
		active energy (T2)
		kWh, price/kWh total price
		present active power
		kW total, kW L1-L2-L3
		present voltage
		V L1-L2-L3
		present current
		A total, A L1-L2-L3
		current transformer factor
		FA e.g. 100A, FA 20 (100/5)
		unit no.
		5 digits
		LED test
		10 Imp/Wh (invisible)
Current range		5 A
		nominal current I_N
		5 A
		max. current I_{max}
		6 A
		consumption
		0.8 W/current path
		start current
		0.002 I_N
Primary current		5 A up to 1275 A
		If not stated otherwise, the standard version of 5 A will be supplied.
Technical data		
		approbations
		PTB approval
		accuracy class
		class 1, EN 61036, active energy
		dimensions (mm)
		107 x 90 x 71
		weight
		0.35 kg
		mounting
		DIN rail acc. to DIN EN 50022-35
		climatic conditions
		EN 61036 interior meter
		operation
		-10 °C to +50 °C
		storage
		-40 °C to +70 °C
		protection class
		2
		current terminals
		4.2 x 6.5 mm
		control terminals
		2.5 x 3 mm
		interface
		optical interface
		acc. to IEC 61107
		tariff start
		230 V AC
		Tariff 2 is energized when terminals 1 and 3 are under load of 230 V AC

Electro-mechanical energy meter for tariff applications

Single-phase energy meter, direct measuring

EMZ70110040	2-wire	230 V	kWh	10 (40) A
EMZ70110060	2-wire	230 V	kWh	10 (60) A

Three-phase energy meter, direct measuring

EMZ40110040	4-wire	3x230/400 V		kWh	10 (40) A
EMZ40210040	4-wire	3x230/400 V	2 tariffs, HT-NT	kWh	10 (40) A
EMZ40115060	4-wire	3x230/400 V		kWh	15 (60) A
EMZ40215060	4-wire	3x230/400 V	2 tariffs, HT-NT	kWh	15 (60) A
EMZ40110060	4-wire	3x230/400 V		kWh	10 (60) A
EMZ40210060	4-wire	3x230/400 V	2 tariffs, HT-NT	kWh	10 (60) A

Electronic three-phase energy meter, direct measuring for three point counter mounting

EMZ40120100	4-wire	3x230/400 V	kWh	20 (100) A
EMZ40125100	4-wire	3x230/400 V	kWh	25 (100) A

Three-phase energy transformer meter

EMZ4015	4-wire	3x230/400 V		kWh	5 A
EMZ4025	4-wire	3x230/400 V	2 tariffs, HT-NT	kWh	5 A



Code

Code		article no.											
Code		E	X	X	*	*	*	*	X	X	X	X	X
Type of energy meter		E	A	A									
AAD1D5F		E	C	P									
ECP***		E	E	M									
EM1000		E	M	U									
EMU***		E	M	U									
EMU***		E	M	U									
EEH****		E	E	H									
EMU***		E	M	U									
WS****		E	W	S									
WQ****		E	W	Q									
Electro mechanical meter		E	M	Z									
Mains													
4-wire	L-N (230 V)				1								
3-wire	L-L (400 V)				2								
4-wire (calibrated)	L-N (230 V)				4								
3-wire (calibrated)	L-L (400 V)				3								
4-wire (equally loaded phases)	L-N (230 V)				5								
2-wire	L-N (230 V)				6								
2-wire (calibrated)	L-N (230 V)				7								
3-wire (equally loaded phases)	L-L (400 V)				8								
special configurations upon request					9								
Output													
without S0-Impulse output					0								
1 S0-impulse output					1								
2 S0-impulse outputs					2								
1 impulse output and RS485 output					3								
2 S0-impulse outputs and RS485 output					4								
cable connection					5								
socket					6								
1 impulse output and M-BUS output					7								
1 relay impulse output (only for EWS****, EWQ****)					9								
Counter													
1 counter for reactive energy	(kvarh)				0								
1 counter for active energy	(kWh)				1								
2 counters for active energy HT-NT	(kWh)				2								
2 counters for active and reactive energy	(kWh)/(kvarh)				3								
2 counters for active energy import/export	(kWh)				4								
LCD counter for active energy	(kWh)				5								
LCD counter for active energy/active power HT-NT	(kWh)/(kW)				6								
LCD counter for active energy HT-NT	(kWh)				7								
LCD counter for active and reactive energy	(kWh)/(kvarh)				8								
LCD counter for active energy import/export	(kWh)				9								
Current range													
1 A					1								
5 (32) A					2								
26 (30) A					3								
5 (63) A					4								
5 A					5								
10 (30) A					1	0	0	3	0				
10 (40) A					1	0	0	4	0				
15 (60) A					1	5	0	6	0				
10 (60) A					1	0	0	6	0				
10 (100) A					1	0	1	0	0				
10 (63) A					6								
16 A					7								
Primary current (only for current transformer meters)													
Example: Secondary 1 A, primary 125 A					1	0	1	2	5				

Notes

10 reasons to be associated with products from MBS

- ✓ **customer oriented solutions**
- ✓ **individual consultancy**
- ✓ **satisfied customers in all continents**
- ✓ **a product range in excess of 20000 units**
- ✓ **supreme technical quality**
- ✓ **a multiple of international licences and certificates,
DIN EN ISO 9001-2000**
- ✓ **official calibration of current transformers and measuring units**
- ✓ **reliability**
- ✓ **fast deliveries**
- ✓ **30 years of success**



MBS AG
(the Company)

CONDITIONS OF SALE

1. INTERPRETATION

1.1 In these Conditions:

Customer means the person who accepts a quotation of the Company for the sale of the goods or whose order for the Goods is accepted by the Company

Goods means the goods (including any instalment of the goods or any parts for them) which the Company is to supply in accordance with these Conditions

Conditions means the standard terms and conditions of sale set out in this document and (unless the context otherwise requires) includes any special terms and conditions agreed in writing between the Customer and the Company

Contract means the contract for the purchase and sale of the Goods

Incoterms means the international rules for the interpretation of trade terms of the International Chamber of Commerce as in force at the date when the Contract is made. Unless the context otherwise requires, any term or expression which is defined in or given a particular meaning by the provisions of Incoterms shall have the same meaning in these Conditions, but if there is any conflict between the provisions of Incoterms and these Conditions, the latter shall prevail.

Writing includes facsimile transmission, e-mail and comparable means of communication

Export means for transport outside the Federal Republic of Germany

- 1.2** A reference to a particular legal concept includes any analogous act or concept in any part of the world where the context so admits and if rights of the Company as provided in these Conditions cannot be validly exercised or retained in another jurisdiction, provided that the laws of such other jurisdiction are applicable, then the Customer shall fully co-operate with the Company and shall do or omit to do any acts or things or execute such documents or deeds as may be required by the Company to give effect to those rights of the Company.
- 1.3** A reference to a particular law is a reference to it as it is in force for the time being.
- 1.4** Words in the singular include the plural and in the plural include the singular.
- 1.5** A reference to one gender includes a reference to the other gender.
- 1.6** Condition headings do not affect the interpretation of these conditions.

2. BASIS OF THE SALE

- 2.1** The Company sells and the Customer purchases the Goods in accordance with any written quotation of the Company which is accepted by the Customer, or any written order of the Customer which is accepted in writing by the Company, subject in either case to these Conditions, which govern the Contract to the exclusion of any other terms and conditions subject to which any quotation is accepted or purported to be accepted, or any order is made or purported to be made, by the Customer. Written confirmation of any verbal order or quotation shall be deemed as the Company's written quotation or written acceptance of order as appropriate.
- 2.2** No variation of these Conditions is binding on the Company unless agreed in writing between the authorised representatives of the Customer and the Company. The Company's employees or agents are not authorised to make any representations about the Goods or the Contract unless confirmed by the Company in Writing. In entering into the Contract the Customer acknowledges that it does not rely on, and waives any claim for breach of, any representations which are not so confirmed.
- 2.3** Any typographical, clerical or other error or omission in any sales literature, quotation, price list, acceptance of offer, invoice or other document or information issued by the Company may be corrected without any liability on the Company.
- 2.4** All samples, drawings, descriptive matter, specifications and advertising issued by the Company and any descriptions or illustrations contained in the Company's catalogues or brochures are issued or published only to give an approximate idea of the Goods described in them. They shall not form part of the Contract and this is not a sale by sample.
- 2.5** The Customer confirms that provision of any personal data (as defined in the Data Protection Act 1998 – "the Act") is in accordance with the

Act and that the Customer gives all consents necessary in order for the Company to lawfully process such data and to pass the data to third parties for the proper business purposes of the Company, and in each case the data may pass outside the European Economic Area.

3. ORDERS AND SPECIFICATIONS

- 3.1** The Customer is responsible to the Company for ensuring the completeness and accuracy of the terms of any order or request for quotation and any other information submitted by the Customer, within a sufficient time for the Company to perform the Contract in accordance with its terms.
- 3.2** The Goods are designed and manufactured in accordance with the legal requirements of the Federal Republic of Germany. Any variations from these requirements requested by the Customer are at the cost and risk of the Customer who shall indemnify the Company for any actual or potential liability arising in consequence plus associated costs. If the Goods are to be manufactured or processed in accordance with a specification of the Customer, the Customer shall indemnify the Company against all liability of the Company for loss, damages, costs and expenses any claim for infringement of any industrial or intellectual property rights of any other person which results from the Company's use of the Customer's specification and any claim against the Company in respect of any alleged defect in the Goods.
- 3.3** The Company reserves the right to change the specification of the Goods to conform with any applicable safety or other statutory or EU requirements or, where the Goods are to be supplied to the Customer's specification, which do not materially affect their quality or performance.
- 3.4** No order which has been accepted by the Company or quotation accepted by the Customer may be amended or cancelled by the Customer except with the agreement of the Company and on terms that the Customer fully indemnifies the Company against all loss costs, damages, charges and expenses incurred by the Company as a result of the amendment or cancellation.
- 3.5** Samples may be provided at the discretion of the Company free of charge for a period of four weeks from delivery of the sample to the Customer, subject to return in good condition. Any postal or freight charges for the delivery or return of samples shall be at the cost of the Customer. A charge will be made for late return or non return of samples or damage to samples.
- 3.6** The Company shall retain the exclusive intellectual property rights in any original works or inventions intellectual property created by or on behalf of the Company in respect of any order, quotation or Contract and it shall be a condition of any supply or production of the same to the Customer that details of such the same are kept strictly confidential.

4. PRICE OF THE GOODS

- 4.1** The price of the Goods shall be the price listed in the Company's published price list current at the date of delivery or deemed delivery subject to variation as set out below. Unless otherwise specified by the Company All quotations are valid for eight weeks.
- 4.2** The Company may, by giving notice to the Customer at any time before delivery, increase the price of the Goods to reflect any increase in cost to the Company which is due to any factor beyond its reasonable control, any change in delivery dates, quantities or specifications for the Goods which is requested by the Customer, or any delay caused by any instructions of the Customer or failure of the Customer to give the Company adequate information or instructions. In particular but without limitation the Company may vary prices to reflect increases in the price of raw materials (including metals trading on the London Metal Exchange ("LME")), energy costs and climate change levies, provided always that (except in the case of the daily LME copper price) if the increase is in excess of 10 % above the original quoted price the Customer may by notice request the alteration or cancellation of the Contract by notifying the Company of the same [by return] upon receipt of notice of the relevant price increase. The Company reserves the right to withdraw from any tender or cancel any Contract in case of failure to agree any price change.

- 4.3 Except as otherwise stated in any quotation or price list of the Company or agreed in Writing between the Customer and the Company, all prices given by the Company are on an ex-works basis. If delivery is otherwise than at the Company's premises, the Customer will be charged additionally for transport, packaging and insurance on orders below the minimum order value as specified by the Company from time to time, in the case of deliveries in Germany.
- 4.4 Export orders not less than the minimum order value specified by the Company will be made FCA Incoterms to German sea port or airport or German border. The Company shall be under no obligation to give notice under Section 32(3) of the Sale of Goods Act 1979.
- 4.5 All prices and other charges are quoted in euros exclusive of VAT or other applicable excise duty or sales tax, costs of packaging and customs clearance, which is payable in addition. The Customer shall provide all identification, VAT, or other information reasonably required by the Company and the Company may claim reimbursement from the Customer for any liability to tax, levy or other charges and costs due to any omission or error of such information. Any certification by government authorities or otherwise required shall be charged to the Customer at cost. The Customer shall be responsible for arranging for any testing and inspection of the Goods at the Company's premises before shipment.
- 4.6 Calibration charges as provided under the respective current Eichge-
bührenverordnung regulation on calibration charges of the Physikalisch
Technische Bundesanstalt ("PTB" or National Institute of Natural and
Engineering Sciences) at Braunschweig shall apply to tariff current
transformers. These charges shall apply in addition to the sales price
and shall not be trade discountable or cash discountable.

5. TERMS OF PAYMENT

- 5.1 The Company may invoice the Customer for the price of the Goods on or at any time after delivery of the Goods, unless the Goods are to be called off in instalments as required or collected by the Customer or the Customer wrongfully fails to take delivery of the Goods in which event the Company may invoice the Customer for the price at any time after the Goods are ready for calling off or collection or (as the case may be) the Company has tendered delivery of the Goods.
- 5.2 Payment is due in euros (without deduction whether by way of set off counterclaim, discount, abatement or otherwise) within 30 days of the Company's invoice, notwithstanding that delivery may not have taken place and title to the Goods has not passed to the Customer. The time of payment of the price is of the essence of the Contract. Upon termination of the Contract all payments to the Company will immediately become due.
- 5.3 If the Customer fails to make any payment on the due date (or commits any other breach of the Contract) then, without prejudice to any other right or remedy available to the Company, the Company may:
 - 5.3.1 cancel the Contract or suspend any further deliveries to the Customer under the Contract or any other Contracts with the Customer;
 - 5.3.2 appropriate any payment made by the Customer to such of the Goods (or the goods supplied under any other contract between the Customer and the Company) as the Company thinks fit; and
 - 5.3.3 charge the Customer interest (both before and after any judgement) on the amount unpaid, at the rate of 8% p.a. above European Central Bank base rate from time to time accruing daily until payment in full is made;
 - 5.3.4 disapply any agreed discount in which case the payment due shall be increased accordingly.
- 5.4 No payment shall be deemed received until the Company has received cleared funds.

6. DELIVERY

- 6.1 Delivery of the Goods shall be made on an Ex Works basis. Assistance with loading Goods at the Company's premises will be provided free of charge at the Company's discretion and at the Customer's risk.
- 6.2 Any dates quoted for delivery of the Goods are approximate only and the Company shall not be liable for any delay in delivery of the Goods howsoever caused. Time for delivery shall not be of the essence unless

previously agreed by the Company in writing. The Goods may be delivered before the quoted delivery date on giving reasonable notice to the Customer.

- 6.3 No partial deliveries are permitted but the Company may at its discretion deliver the Goods by separate instalments, in which case each delivery shall constitute a separate contract. Failure by the Company to deliver any one or more of the instalments in accordance with those Conditions or any claim by the Customer in respect of any one or more instalments shall not entitle the Customer to cancel or treat the Contract as a whole as repudiated.
- 6.4 If the Customer fails to take delivery or call off the Goods within the time agreed or fails to give the Company adequate delivery instructions or requisite documents or authorisations for delivery (otherwise than due to any cause beyond the Customer's reasonable control or the Company's fault) then, without prejudice to any other right or remedy available to the Company:
 - 6.4.1 the Goods shall be deemed delivered and risk shall pass to the Customer (including for loss or damage caused by the Company's negligence); and
 - 6.4.2 the Company may store the Goods until actual delivery without liability at the cost and risk of the Customer and charge the Customer for the reasonable costs (including insurance) of storage or sell the Goods at the best price readily obtainable and (after deducting all reasonable storage and selling expenses) account to the Customer for the excess over the price under the Contract or charge the Customer for any shortfall below the price under the Contract.
- 6.5 Claims for damage in transit, short delivery or non-delivery or loss in transit must be made in writing to the Company [and carrier] within seven days of the actual or anticipated date of delivery whichever is the earlier. Any additional information must be provided at the request of the Company and the expense of the Customer.
- 6.6 The Customer shall not be entitled to object to or reject the Goods or part of the Goods by reason of delivery of a surplus or shortfall of up to 10% of the quantity stated in the Contract and shall pay for such Goods at the pro rata Contract rate.
- 6.7 Any liability of the Company for non-delivery of the Goods shall be limited to replacing the Goods within a reasonable time or issuing a credit note at the pro rata Contract rate against any invoice raised for such Goods.

7. OWNERSHIP OF GOODS

- 7.1 Notwithstanding delivery and passing of risk in the Goods or any other provision of these Conditions, ownership of the Goods shall not pass to the Customer until the Company has received in full (in cash or cleared funds) all sums due to it in respect of:
 - 7.1.1 the Goods; and
 - 7.1.2 all other sums which are or which become due to the Company from the Customer on any account.
- 7.2 Without prejudice to any common law or statutory rights of the Company as unpaid seller, until ownership of the Goods has passed to the Customer, the Customer shall:
 - 7.2.1 hold the Goods on a fiduciary basis as the Company's bailee;
 - 7.2.2 store the Goods (at no cost to the Company) separately from all other goods of the Customer or any third party in such a way that they remain readily identifiable as the Company's property;
 - 7.2.3 not destroy, deface or obscure any identifying mark or packaging on or relating to the Goods; and
 - 7.2.4 maintain the Goods in satisfactory condition and keep them insured on the Company's behalf for their full price against all risks to the reasonable satisfaction of the Company. On request the Customer shall produce the policy of insurance to the Company.
- 7.3 The Customer may resell the Goods before ownership has passed to it solely on the following conditions:
 - 7.3.1 any sale shall be effected in the ordinary course of the Customer's business at full market value; and
 - 7.3.2 any such sale shall be a sale of the Company's property on the Customer's own behalf and the Customer shall deal as principal when making such a sale.
- 7.4 Until such time as the title in the Goods passes to the Customer (and

provided the Goods are still in existence and have not been resold), the Company shall be entitled at any time to require the Customer to deliver up the Goods to the Company and, if the Customer fails to do so forthwith, the Customer grants the Company its agents and employees an irrevocable licence to enter at any time any vehicles or premises owned or occupied by the Customer or in its possession or control to inspect repossess and remove the Goods. The Customer will indemnify the Company against any liability for damages caused in such repossession which could not reasonably have been avoided.

- 7.5 The Customer's right to possession of the Goods shall terminate immediately if:
- 7.5.1 the Customer has a bankruptcy order made against him or makes an arrangement or composition with his creditors, or otherwise takes the benefit of any statutory provision for the time being in force for the relief of insolvent debtors, or (being a body corporate) convenes a meeting of creditors (whether formal or informal), or enters into liquidation (whether voluntary or compulsory) except a solvent voluntary liquidation for the purpose only of reconstruction or amalgamation, or has a receiver and/or manager, administrator or administrative receiver appointed of its undertaking or any part thereof, or documents are filed with the court for the appointment of an administrator of the Customer or notice of intention to appoint an administrator is given by the Customer or its directors or by a qualifying floating charge holder (as defined in paragraph 14 of Schedule B1 to the Insolvency Act 1986), or a resolution is passed or a petition presented to any court for the winding-up of the Customer or for the granting of an administration order in respect of the Customer, or any proceedings are commenced relating to the insolvency or possible insolvency of the Customer; or
 - 7.5.2 the Customer suffers or allows any execution, whether legal or equitable, to be levied on his/its property or obtained against him/it, or fails to observe or perform any of his/its obligations under the Contract or any other contract between the Company and the Customer, or is unable to pay its debts within the meaning of section 123 of the Insolvency Act 1986 or the Customer ceases to trade; or
 - 7.5.3 the Customer encumbers or in any way charges any of the Goods.
- 7.6 The Customer may not pledge or in any way charge by way of security for any indebtedness any of the Goods which remain the property of the Company, but if the Customer does so (or does or fails to do anything and the provisions of Clause 7.5.1 or 7.5.2. may or do apply), all sums owing by the Customer to the Company shall (without prejudice to any other right or remedy of the Company) immediately be due and payable.
- 7.7 The Company shall be entitled to recover payment for the Goods notwithstanding that ownership of any of the Goods has not passed from the Company.
- 7.8 Where the Company is unable to determine whether any Goods are the goods in respect of which the Customer's right to possession has terminated, the Customer shall be deemed to have sold all goods of the kind sold by the Company to the Customer in the order in which they were invoiced to the Customer.
- 7.9 If any of the events mentioned in Clause 7.5 above shall occur or the Company reasonably apprehends that any of those events is about to occur in relation to the Customer and notifies the Customer accordingly, then, without prejudice to any other right or remedy available to the Company, the Company may cancel the Contract or suspend any further deliveries under the Contract without any liability to the Customer, and if the Goods have been delivered but not paid for the price shall become immediately due and payable notwithstanding any previous agreement or arrangement to the contrary.
- 7.10 On termination of the Contract, howsoever caused, the Company's (but not the Customer's) rights contained in this condition 7 shall remain in effect.

8. WARRANTIES

- 8.1 Subject to the conditions set out below the Company warrants that the Goods will be free from defects in material and workmanship for a period of 1 year from delivery.

- 8.2 This warranty is given subject to the following conditions:

- 8.2.1 the Company is not liable for any defect in the Goods arising from any drawing, design or specification supplied by the Customer or for any defect arising from fair wear and tear, wilful damage, negligence, abnormal working conditions, failure to follow the Company's instructions oral or in writing, misuse or alteration or repair of the Goods without the Company's approval;
 - 8.2.2 no warranty is given as to the length of working life of the Goods or that they will be suitable for any specific purpose or conditions, notwithstanding that such purpose and conditions have been made known to the Company;
 - 8.2.3 the Company is not liable under this warranty (or any other warranty, condition or guarantee) if the total price for the Goods has not been paid by the due date for payment;
 - 8.2.4 this warranty does not extend to parts, materials or equipment not manufactured by the Company, in respect of which the Customer is only entitled to the benefit of such warranty or guarantee of the manufacturer to the Company as the Company is able to pass on to the Customer;
 - 8.2.5 Defects claims are notified to the Company within [7] days from delivery or (where the defect was not apparent on reasonable inspection) within [7] days after discovery of the defect. If delivery is not refused, and the Customer does not notify the Company within this time, the Customer will be deemed to have accepted the Goods as complying with the Contract and must pay the price for the Goods accordingly;
 - 8.2.6 the Company must be given a reasonable opportunity after receiving notice of defect for examining such Goods and the Customer (if asked to do so by the Company) must return such Goods to the Company's place of business at the Customer's cost for the examination to take place there;
- 8.3 Subject to condition 8.2, if any of the Goods do not conform with the warranty in condition 8.1 the Company shall at its option repair or replace such Goods (or the defective part) or refund the price of such Goods at the pro rata Contract rate provided that, if the Company so requests, the Customer shall return the Goods or the part of such Goods which is defective to the Company.

9. LIMITATION OF LIABILITY

- 9.1 Subject to condition 8 – warranty, the following provisions set out the entire financial liability of the Company (including any liability for the acts or omissions of its employees, agents and sub-contractors) to the Customer in respect of:
- 9.1.1 any breach of these conditions including (without limitation) any delay or failure in the delivery of the Goods;
 - 9.1.2 any use made or resale by the Customer of any of the Goods, or of any product incorporating any of the Goods; and
 - 9.1.3 any representation, statement or tortious act or omission including negligence arising under or in connection with the Contract.
- 9.2 All warranties, conditions and other terms implied by statute or common law or other analogous laws are, to the fullest extent permitted by law, excluded from the Contract.
- 9.3 Nothing in these conditions excludes or limits the liability of the Company for any matter which it would be illegal for the Company to exclude or attempt to exclude its liability including, if applicable:
- 9.3.1 for death or personal injury caused by the Company's negligence; or
 - 9.3.2 under section 2(3), Consumer Protection Act 1987; or
 - 9.3.3 for fraud or fraudulent misrepresentation.
- 9.4 Subject to condition 9.2 and condition 9.3:
- 9.4.1 the Company's total liability in contract, tort (including negligence or breach of statutory duty), misrepresentation, restitution or otherwise, arising in connection with the performance or contemplated performance of the Contract shall be limited to the lesser of the value of the Goods supplied under the Contract to which any claim relates; or
 - 9.4.2 the amount received by the Company in relation to the Contract under any relevant liability insurance currently held by the Company; [and]
 - 9.4.3 the Company shall not otherwise be liable for any loss (including,

without limitation pure economic loss, loss of profit, loss of business, or depletion of goodwill) in each case whether direct, indirect or consequential, or any claims for consequential compensation whatsoever (howsoever caused) cost, damages, charges or expenses which arise directly or indirectly out of or in connection with the Contract.

- 9.5 The Customer recognises that the limitation of liability contained in this clause is reasonable in that the prices quoted by us are dependent upon such limitation being incorporated in the Contract, and that we may have insurance cover which covers some or all of the losses purported to be excluded herein, but that there are legitimate business reasons for still excluding such liability, including (but not limited to) the maintenance of a clean insurance claims record.

10. FORCE MAJEURE

The Company shall not be liable to the Customer or in breach of the Contract due to any delay in performing, or any failure to perform or any variation in performance of, any of the Company's obligations if the delay or failure was due to any cause beyond the Company's reasonable control. [Provided that if the event in question continues for a continuous period in excess of [one hundred and eighty (180) days, the Customer shall be entitled to give notice in writing to the Company to terminate the Contract].

11. ADDITIONAL EXPORT TERMS

- 11.1 Unless otherwise agreed in writing by the Company, all Goods are supplied on the strict condition that:
- 11.1.1 they are solely for civil use;
 - 11.1.2 they are not to be supplied to any country or for any application prohibited by any law or regulation binding or effective in the European Union;
 - 11.1.3 they will not in any way be installed used or applied in or in connection with the operation of any nuclear facilities such as but not limited to nuclear power plants, nuclear fuel manufacturing plants, uranium enrichment plants, spent nuclear fuel stores or research reactors.
- 11.2 The Customer undertakes not to offer the Goods for resale in any country notified by the Company to the Customer at or before the time the Customer's order is placed, or to sell the Goods to any person if the Customer knows or has reason to believe that that person intends to resell the Goods in any such country. The Customer agrees to abide by any governmental regulations of any relevant country which may exist preventing or restricting the export of the Goods to certain countries and to indemnify the Company against any actions costs demands or expenses resulting from any failure by the Customer to do so.
- 11.3 The Contract may be subject to United States and European Union laws and requirements to obtain a validated export licence as well as to similar laws in other applicable jurisdictions. If applicable the Company shall file for the export licence only after appropriate documentation for the licence application has been provided by the Customer, within a reasonable time after order acceptance. If an export licence is not granted or is revoked by the appropriate authorities, the Contract may be cancelled by the Company without liability.
- 11.4 In the case of Export contracts:
- 11.4.1 the provisions of this clause 11 shall (subject to any special terms agreed in writing between the Customer and the Company) apply notwithstanding any other provision of these Conditions.
 - 11.4.2 the Customer shall be responsible for complying with any legislation or regulations governing the importation of the Goods into the country of destination and for the payment of any duties on them.
 - 11.4.3 payment of all amounts due to the Company shall be made by irrevocable letter of credit payable in Germany subject to UCP (Uniform Customs and Practice for documentary credits – current revision) opened by the Customer at the Customer's expense in favour of the Company and confirmed by a recognised European Bank acceptable to the Company negotiable at sight against documents valid 90 days.
 - 11.4.4 the United Nations Convention on Contracts for the International Sale of Goods shall apply to Contracts made under these Conditions to the extent that they are not inconsistent with these provisions. In the case of any conflict these Conditions shall prevail.

12. GENERAL

- 12.1 The Company may perform any of its obligations or exercise any of its rights under the Contract, through any associated companies, agents or sub-contractors appointed by it in its absolute discretion for the purpose.
- 12.2 Any notice to be given by either party to the other under these Conditions shall be in Writing. Service of notices may be by hand, pre-paid special delivery or recorded delivery post, fax or email (with written confirmation of fax or email signed by an authorised representative posted or delivered the same day). Service is deemed effected: by hand at the time of delivery; by inland first class post on the second day after posting; by fax at the time of dispatch provided confirmation of receipt from the machine of the other party is received and by email within 12 hours provided that within that time no notice of delivery failure has been received.. Service, or confirmation of service by post to persons overseas must be by airmail post, and is deemed effected on the fourth day after posting. Failure to confirm service of any notice sent by fax will render the notice invalid.
- 12.3 No waiver by the Company of any breach of or default under the Contract by the Customer shall be considered as a waiver of any subsequent breach of the same or any other provision. Any waiver shall in no way affect the other terms of the Contract. Failure or delay by the Company in enforcing or partially enforcing any provision of the Contract shall not be construed as a waiver of any of its rights under the Contract.
- 12.4 The Company may assign the Contract or any part of it to any person, firm or company. The Customer shall not be entitled to assign the Contract or any part of it without the prior written consent of the Company.
- 12.5 Each right or remedy of the Company under the Contract is without prejudice to any other right or remedy of the Company whether under the Contract or not.
- 12.6 If any provision of the Contract is found by any court, tribunal or administrative body of competent jurisdiction to be wholly or partly illegal, invalid, void, voidable, unenforceable or unreasonable it shall to the extent of such illegality, invalidity, voidness, voidability, unenforceability or unreasonableness be deemed severable and the remaining provisions of the Contract and the remainder of such provision shall continue in full force and effect.
- 12.7 The parties to the Contract do not intend that any term of the Contract shall be enforceable by virtue of the Contracts (Rights of Third Parties) Act 1999 by any person that is not a party to it.
- 12.8 The Contract shall be governed by the laws of Germany and, subject as provided in clause 12.9 below, the parties submit to the exclusive jurisdiction of the German courts.
- 12.9 Subject only to the Company's right to bring a claim in the German courts, any disputes connected with this contract or the single business actions performed under its conditions shall be ruled by German Law excluding the Convention on the International Sales of Goods (CISG). Place of jurisdiction is Heilbronn/Germany.
- 12.9.1 The number of arbitrators shall be one.
 - 12.9.2 The language to be used in the arbitral proceedings shall be German. In the event that the Company's option is deemed to be ineffective for any reason, the language to be used in the arbitral proceedings shall be English.
- 12.10 The Company reserves the right to refer any dispute arising out of or in connection with this contract, including any question regarding its existence, validity or termination that has not already been referred to arbitration, to the German courts. Once the Company has exercised this option, by issuing a claim in any German court, it shall thereafter not be possible for either party to refer the same dispute to arbitration.
- 12.11 In case of any conflict the English language version of these Conditions shall prevail.